
CABLE COVERS & SERVICE IDENTIFICATION



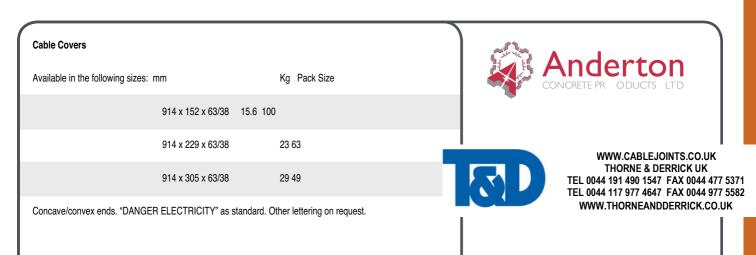



HI - AX LIDS

CI/SfB Yf2 | (90.6) | Yg2 |

May 2004







CONCRETE IN-FILL

The Anderton Hi-Ax lid has been designed to withstand an II.5 tonne wheel loading, thus allowing vehicular overrun. The lids are available in steel chequer plate and concrete infill and are compatible to the Anderton troughing range.

All lids are galvanised to prevent corrosion, with the larger lids having substantial under-bracing to give the required strength.

For further information please contact our Sales Office.


Please note lids with under-bracing will reduce the internal capacity of the Trough.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

UTILITY DUCTING

CI/SfB | (90.6) | Yg2 | May 2004

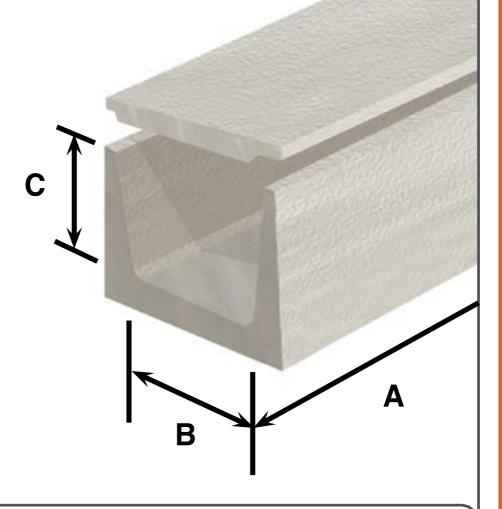

Utility Ducting

Anderton ducting has been at the forefront of cost-effective cable and pipeline protection for many years. Complete with removable lids for easy access Anderton offer a wide range of sizes to satisfy all applications and installation projects.

Product description Size of trough		Trough Lid	Pack Size	
	A B C Kg Kg			Ander CONCRETE PR OD
Joint Bay	457 475 305 82 38		8	
AA Trough	610 345 305 90 37		8	
Type R	914 150 115* 38 12		18 With lids	
Type R500	500 150 115 32 8		36 With lids	
Type Z	475 685 345* 102 46		4	WWW.C, THORI TEL 0044 191 49 TEL 0044 117 99 WWW.THOR
Sutton	610 585 305 133 78		8	
7 x 9	760 175 215 68 28		8	
ANDERTON 1	400 1000 750 292 226		1	
ANDERTON 2	400 750 750 271 178		2	
ANDERTON 3	400 500 750 245	142	2	



CABLEJOINTS.CO.UK RNE & DERRICK UK 490 1547 FAX 0044 477 5371 977 4647 FAX 0044 977 5582 RNEANDDERRICK.CO.UK