



Earth Rod to Cable 'G' Clamps

These clamps are used for joining earth rods to different sizes of stranded copper conductor. The clamps have a high resistance to corrosion and are mechanically strong to ensure a lasting connection.

Earth Rod Shank Ø mm	Conductor Range mm ²	L mm	W mm	H mm	Unit Weight kg	Pack Quantity	Part Number
9.5	6 - 35	32	20	16	0.04	25	ERR 1035
12.7	6 - 35	34	25	15	0.05	25	ERR 1635
	35 - 70	41	25	17	0.08	50	ERR 1670*
14.2	6 - 16	34	25	15	0.05	25	ERR 1635
	16 - 70	41	25	17	0.08	50	ERR 1670*
	70 - 185	48	30	19	0.10	50	ERR 2095*
15.0	6 - 16	34	25	15	0.05	25	ERR 1635
	16 - 70	41	25	17	0.08	50	ERR 1670*
	70 - 150	48	30	19	0.10	50	ERR 2095*
16.0	6 - 70	41	25	17	0.08	50	ERR 1670*
	70 - 120	48	30	19	0.10	50	ERR 2095*
17.2	6 - 95	48	30	19	0.10	50	ERR 2095*
20.0	6 - 70	48	30	19	0.10	50	ERR 2095*

Material: Gunmetal with M10 x 25mm Phosphor Bronze Set Screw.
(ERR1035 in Naval Brass with M6 x 20mm Stainless Steel Set Screw).

* Suitable for use with 8mm Ø solid circular copper conductor.

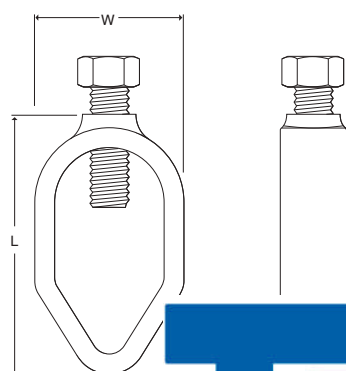

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS