




CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582

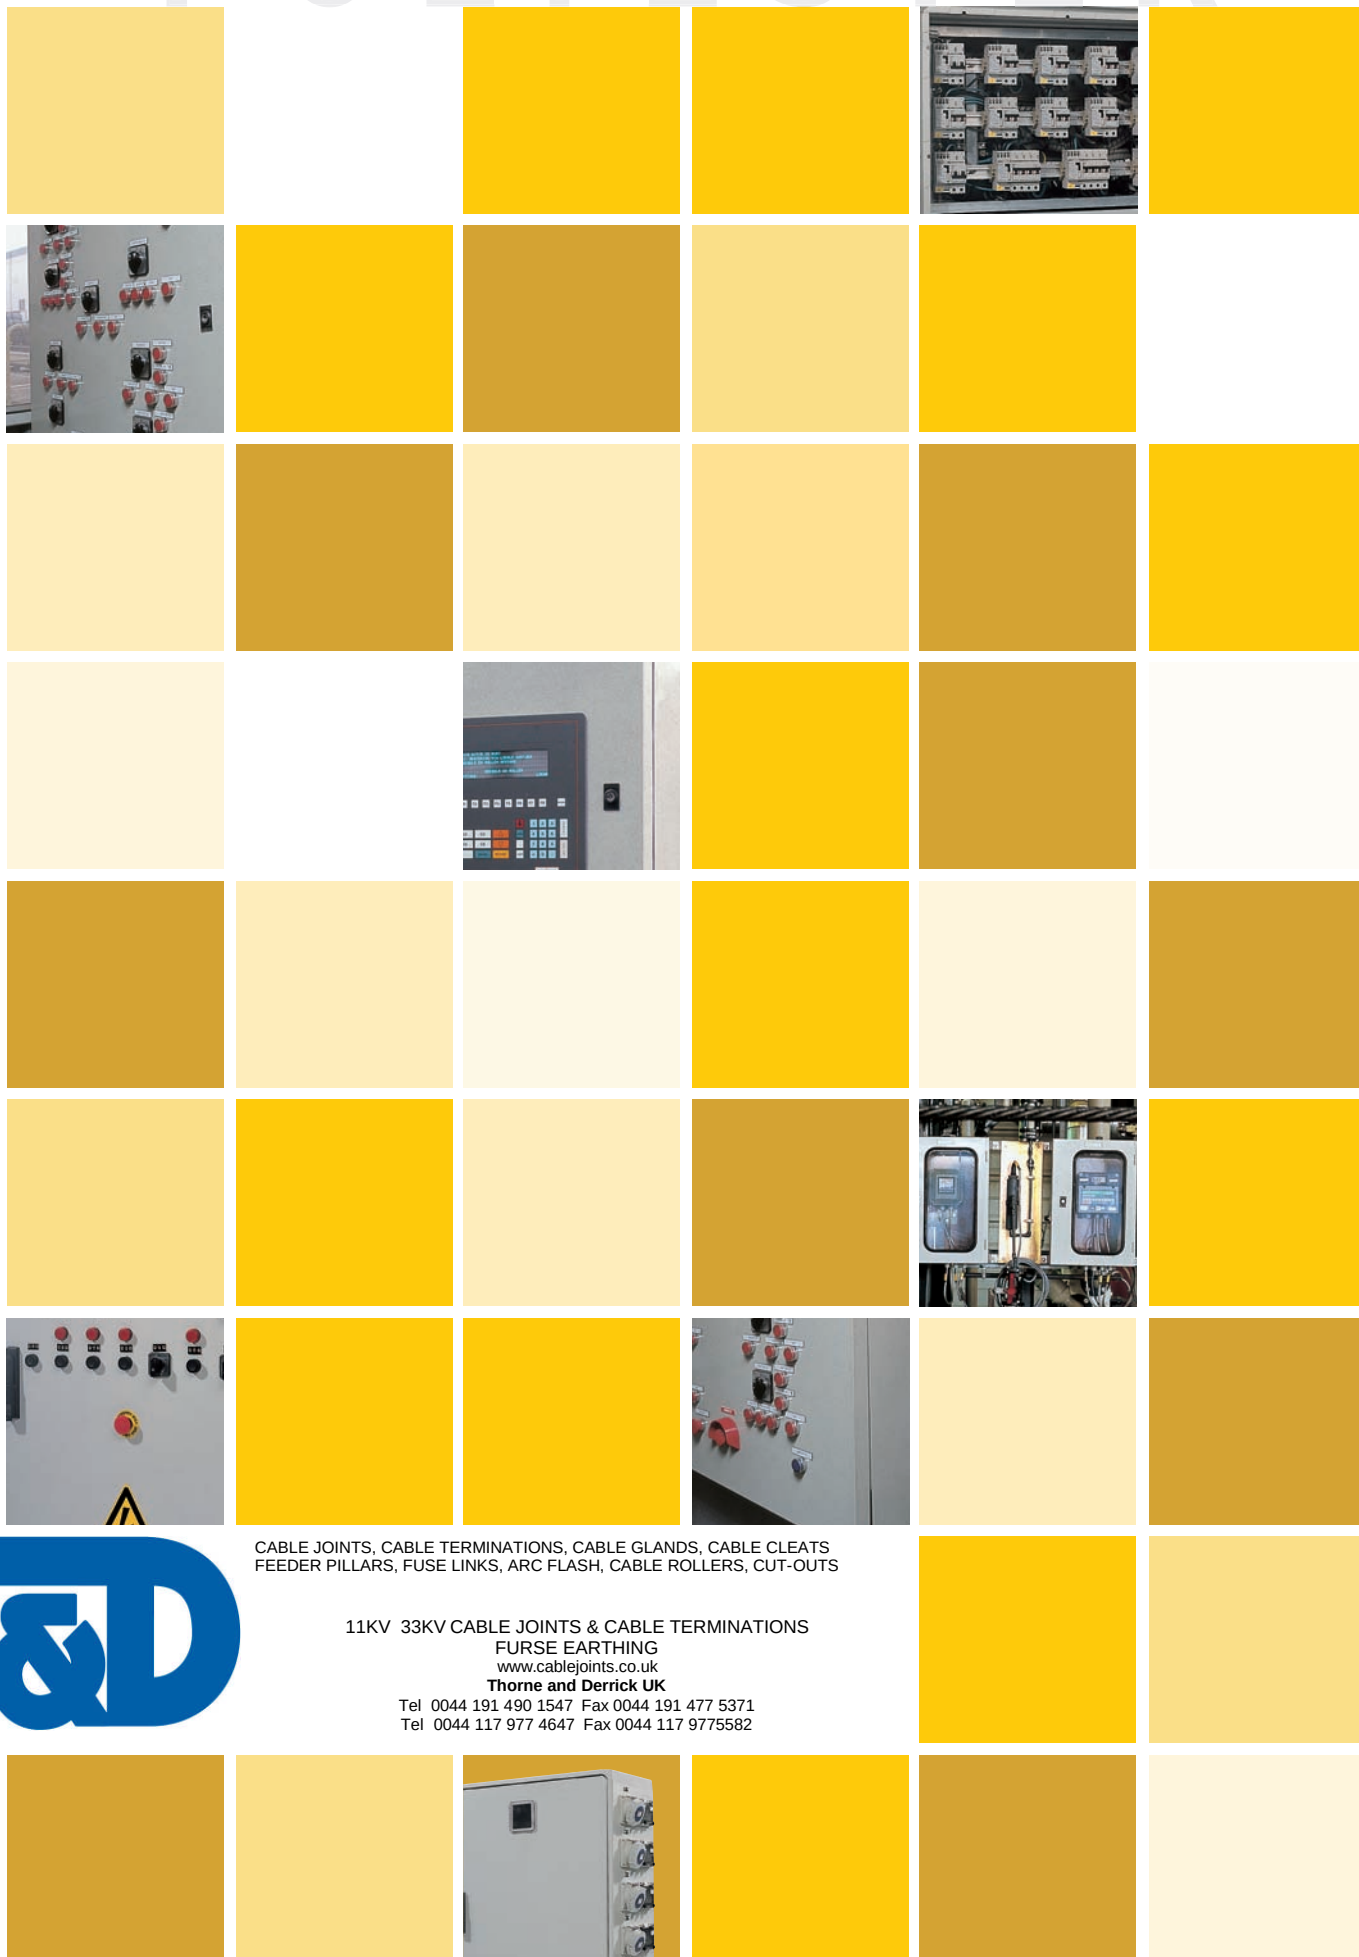

POLYESTER

UCP

IP66/NEMA 4, 4X, 12, 13
Compact version
H: 315-1035
W: 215-835
D: 170-300

**UniPLAST®**

188

**UniPLAST®**

UDP

IP65/IP 55 NEMA 4, 4X, 12, 13
Modular version
H: 500-1250
W: 500-1000
D: 320

194

Polyester enclosures

IP 66/65

Sealing is ensured by an extruded one piece polyurethane gasket.

Doorlifter ensuring the door returns to it's centre position when closing(as from UCP/UCPT 750)

Cabinets are maintenance free and corrosion resistant.

Different mounting possibilities.

Cable access totally variable (no gland plate opening)



Uniplast Compact

UCP / UCPT

Uniplast Enclosure Compact Version

The Uniplast range of Compact polyester enclosures, conforms to IP66. Uniplast Compact is a fibre-glass reinforced polyester design, and is double insulated to give maximum safety to users. A large range of standard sizes and numerous mounting possibilities makes Uniplast Compact extremely flexible.



IP66 / NEMA 4, 4X, 12, 13 IK10 / IK07
IK10 / IK07

Technical data

Material: Fibre-glass reinforced polyester. UCPT viewing area: polycarbonate.

Body: Monoblock moulded 3mm thick. Four holes for direct wall fixing. Without gland plate openings.

Door: Door with or without window and 180° opening. For UCP/UCPT750 and above a doorlifter ensures an easier closing. Sealing is ensured by an extruded one piece polyurethane gasket.

Lock: DIN 3mm insert and 90° movement. UCP/UCPT540 and above have three locking points. Other locks are available as an accessory.

Temperature resistance: -50°C to 70°C in continuous use (peak temperatures up to 150°C).

Characteristics: Self extinguishing and halogen free. Double isolated according to EN60439-1. Rated insulation voltage $U_i=1000V$.

Protection: Complies with IP 66 and NEMA 4, 4X, 12 and 13. Impact resistance IK 10 (IK 07 for enclosures with transparent door)

Finish: RAL 7035, precoloured raw material.

Delivery: Enclosure with door, fixing screws for the mounting plate and a self adhesive rain strip.



Uniplast Compact

UCP / UCPT, IP66 / NEMA 4, 4X, 12, 13 IK10 / IK07


Plain door

H	W	D	Weight	N° of locking points	Part No.
315	215	170	2.60	1	UCP320
415	315	170	3.68	1	UCP430
515	415	230	6.58	3	UCP540
615	415	230	7.53	3	UCP640
735	535	270	12.00	3	UCP750
835	635	300	16.00	3	UCP860
1035	835	300	23.10	3	UCP1080

Transparent door

H	W	D	Weight	N° of locking points	Part No.
415	315	170	3.68	1	UCPT430
515	415	230	6.58	3	UCPT540
615	415	230	7.53	3	UCPT640
735	535	270	12.00	3	UCPT750
835	635	300	16.00	3	UCPT860
1035	835	300	23.10	3	UCPT1080

UCP Dimensions

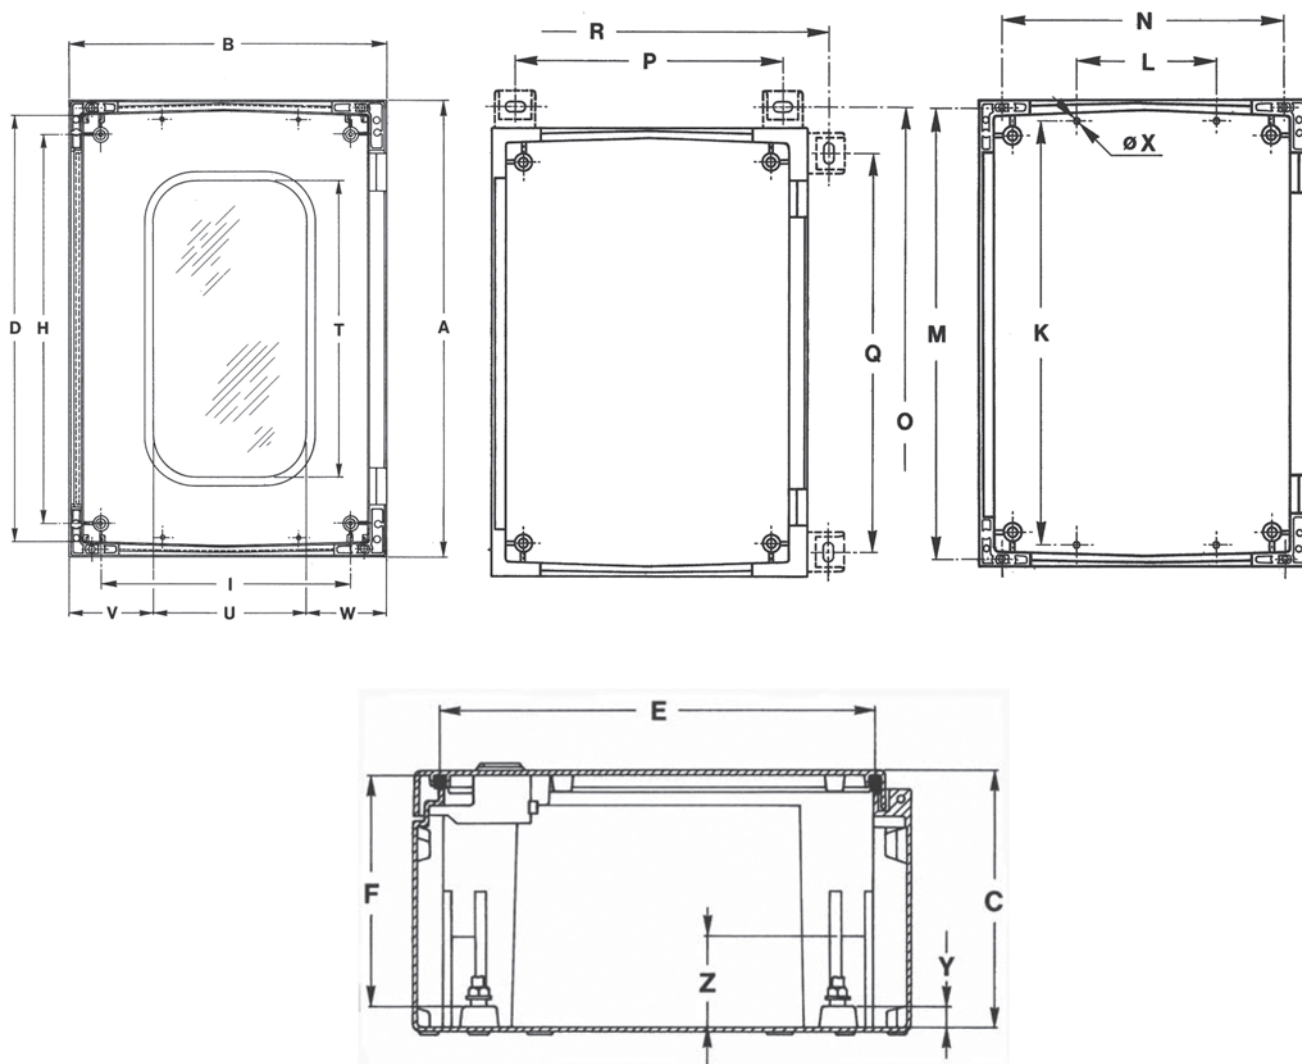


UCP/UCPT	320	430	540	640	750	860	1080
A	315	415	515	615	735	835	1035
B	215	315	415	415	535	635	835
C	170	170	230	230	270	300	300
D	275	375	475	575	675	775	975
E	170	270	370	370	470	570	770
F	148	148	208	208	248	278	277
H	225	325	425	525	625	725	925
I	125	225	325	325	425	525	725
K	275	375	475	575	675	775	975
L	70	150	200	200	300	400	600
M	295	395	495	595	-	-	-
N	155	255	355	355	-	-	-
O	362	462	562	662	782	882	1082
P	162	262	362	362	482	582	782
Q	262	362	462	562	682	782	982
R	262	362	462	462	582	682	882
T	-	280	380	480	580	680	880
U	-	130	230	230	330	430	630
V	-	70	70	70	80	80	80
W	-	115	115	115	125	125	125
X	6	6	6	6	8	8	8
Y	14	14	15,5	15,5	15,5	15,5	15,5
Z	28	25	88	88	118	48	148



Uniplast Compact accessories

UMPZ C, Steel mounting plate



Description: Steel mounting plate for UCP/UCPT enclosures.

Material: 2mm galvanised steel.

Pack. quantity: 1 piece.

For enclosure				
H	W	h	w	Part No.
315	215	250	150	UMPZ320
415	315	350	250	UMPZ430
515	415	450	350	UMPZ540
615	415	550	350	UMPZ640
735	535	650	450	UMPZ750
835	635	750	550	UMPZ860
1035	835	950	750	UMPZ1080

UMPP C, Insulated mounting plate



Description: Insulated mounting plate for UCP/UCPT enclosures.

Material: 5 mm pertinax.

Pack. quantity: 1 piece.

For enclosure				
H	W	h	w	Part No.
315	215	250	150	UMPP320
415	315	350	250	UMPP430
515	415	450	350	UMPP540
615	415	550	350	UMPP640
735	535	650	450	UMPP750
835	635	750	550	UMPP860
1035	835	950	750	UMPP1080

UWMB, Wallmounting brackets




Description: Mounting brackets for wall fixing UCP enclosures. It gives a clearance of 20mm between the enclosure and the wall.

Pack. quantity: 4 brackets with mounting accessories.

Material	Part No.
304 Stainless steel	UWMB01
Polyamide	UWMB02

UMPT C, Telequick mounting plate



Description: Telequick mounting plate for UCP/UCPT enclosures.

Material: 1.5mm perforated steel.

Pack. quantity: 1 piece.

For enclosure				
H	W	h	w	Part No.
315	215	250	150	UMPT320
415	315	350	250	UMPT430
515	415	450	350	UMPT540
615	415	550	350	UMPT640
735	535	650	450	UMPT750
835	635	750	550	UMPT860
1035	835	950	750	UMPT1080

UCD, Depth adjustment kit



Part No.

UCD01

UDH C, Handles




Description: Swinghandle to replace the standard lock in UCP/UCPT enclosures. For the swinghandle UDH2C and UDH3C, machining is required.

Delivery: 1 piece with mounting accessories.

Description	Part No.
Neutral handle	UDH0C
Handle with key E2432	UDH1C
Swinghandle for half cylinder	UDH2C
Swinghandle for pad-locking	UDH3C

Uniplast Compact accessories

UMF, Mounting frame

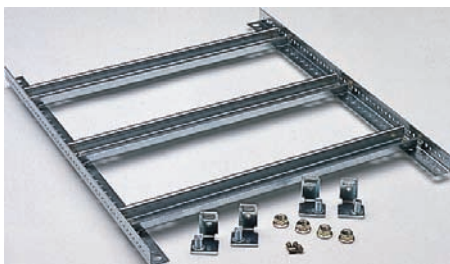

Description: For easy mounting of DIN-rail components. The DIN-rails are adjustable in height.

Material: Galvanised steel.

Delivery: Vertical profiles, reinforced DIN-rails, supporting brackets and mounting accessories.

For enclosure		N° of modules	N° of rows	Part No.
H	W			
315	215	12	2	UMF3202
415	315	24	2	UMF4302
515	415	54	3	UMF5403
615	415	54	3	UMF6403
735	535	88	4	UMF7503
835	635	112	4	UMF8604
1035	835	200	5	UMF10805

UFCP P, Plain full cover plate



Description: Plain front cover plate to protect the equipment mounted in the enclosure.

Material: Polyester.

Finish: RAL 7035.

Delivery: Cover plate, supporting brackets, one quarter turn fasteners and mounting accessories.

For enclosure				Part No.
H	W	h	w	
315	215	250	122	UFCP3200
415	315	350	222	UFCP4300
515	415	450	322	UFCP5400
615	415	550	322	UFCP6400
735	535	660	422	UFCP7500
835	635	760	522	UFCP8600
1035	835	960	722	UFCP1080

UFCP D, Cover plate with DIN cut-outs



Description: Front cover plate with cut-outs for DIN components. The mounting frame with DIN rails UMFxxxx must be ordered separately.

Material: Polyester.

Finish: RAL 7035.

Delivery: Cover plate, supporting brackets, one quarter turn fasteners and mounting accessories.

For enclosure			N° of modules	N° of rows	Part No.
H	W	d			
315	215	125	12	2	UFCP3201
415	315	150	24	2	UFCP4301
515	415	150	54	3	UFCP5401
615	415	150	54	3	UFCP6401
735	535	150	88	4	UFCP7501
835	635	150	112	4	UFCP8601
1035	835	150	200	5	UFCP1081

UHS, Hinge support



Description: To be used when we want a hinged cover plate (UFCP).


Delivery: 2 pieces with mounting accessories.

Part No.
UHS01



Uniplast Compact accessories

UFCP I, Frame for individual cover plates

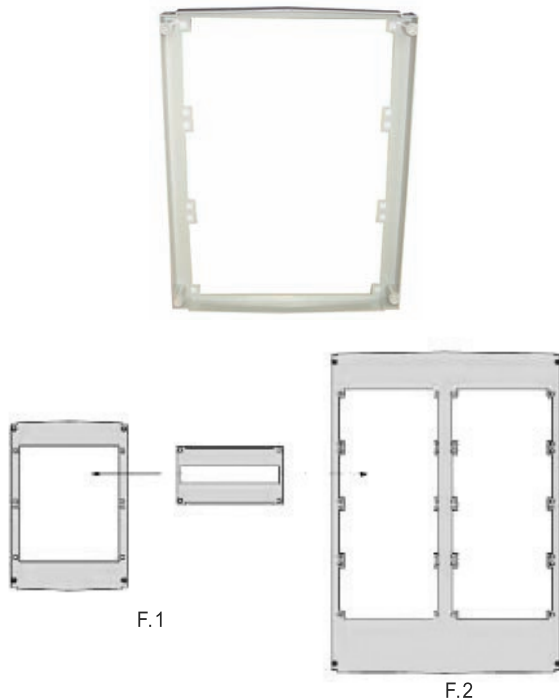

Description: Frame to be covered with individual cover plates UICP. For enclosures 600 and 800 mm wide it has 2 columns.

Material: Polyester.


Finish: RAL 7035.

Delivery: Frame, supporting brackets, one quarter turn fasteners and mounting accessories.

For enclosure		N° Individual cover plates	Part No.
H	W		
415	315	2	UFCP4302
515	415	3	UFCP5402
615	415	3	UFCP6402
735	535	4	UFCP7502
835	635	8	UFCP8602
1035	835	10	UFCP1082

F.1= Single; F.2= Double.

UPVD, Air ventilation grids IP44



Description: For ventilating the enclosure, invisible if you mount them on the inside panel of the double-panelled corner. Machining is required (hole 34.9mm diameter).

Material: Polyester.

Protection degree: IP 34.

Pack. quantity: 2 pieces.

Part No.
UPVD01

UICP P, Plain individual cover plate



Description: Individual plain cover plate to be mounted in the frame UFCP I, the height of the cover is 150 mm.

Material: PVC.

Finish: RAL 7035.

Delivery: 1 piece with mounting accessories.

For enclosure				Part No.
H	W	h	w	
415	315	150	255	UICP4300
515	415	150	322	UICP5400
615	415	150	355	UICP6400
735	535	150	455	UICP7500
835	635	150	455	UICP8600
1035	835	150	355	UICP1080

UICP D, Slotted individual cover plate



Description: Individual slotted cover plate to be mounted in the frame UFCP I, the height of the cover is 150 mm.

Material: PVC.

Finish: RAL 7035.

Delivery: 1 piece with mounting accessories.

For enclosure			N° of modules	Part No.
H	W	h		
415	315	150	12	UICP4301
515	415	150	17	UICP5401
615	415	150	18	UICP6401
735	535	150	22	UICP7501
835	635	150	12	UICP8601
1035	835	150	18	UICP1081

Uniplast Modular

UDP / UDPT

Uniplast Enclosure Modular version

The Uniplast range of Modular polyester enclosures, conforms to IP65. Uniplast Modular is a fibre-glass reinforced polyester design, and is double insulated to give maximum safety to users. Different modular enclosures can be joined together to achieve larger configurations.



IP65/IP55NEMA 4, 4X, 12, 13 IK10 / IK07
IK10 / IK07



Technical data

Material: Fibre-glass reinforced polyester. UDPT viewing area: polycarbonate.

Body: Modular moulded, with rear fixing holes. Direct fixing to the wall or by use of wallmounting brackets, to a pole by use of UPM or to the floor by use of the plinth UPP or DIN-base UAF and UMPS.

Door: Flush mounted door with or without window and 100° opening. For larger sizes a doorlifter ensures an easier closing. Sealing is ensured by an extruded one piece polyurethane gasket.

Lock: Premounted handle suitable for all types of half cylinder locks (standard depth of 40mm). Five locking points (three points in 500mm width enclosures)

Temperature resistance: -50°C to 70°C in continuous use (peak temperatures up to 150°C).

Characteristics: Self extinguishing and halogen free. Double isolated according to EN60439-1. Rated insulation voltage $U_i=1000V$.

Protection: Complies with IP 65 and NEMA 4, 4X, 12 and 13 (IP55 for enclosures with transparent door). Impact resistance IK10 (IK07 for enclosures with transparent door).

Finish: RAL 7035, precoloured raw material.

Delivery: Enclosure with door, fixing screws for the mounting plate and wallmounting brackets.




UDP / UDPT, IP65/IP55NEMA 4, 4X, 12, 13 IK10 / IK07

Plain door


H	W	D	Weight	N° of doors	Part No.
500	500	320	16	1	UDP5050
	750	320	19	1	UDP5075
750	500	320	20	1	UDP7550
	750	320	25	1	UDP7575
1000	1000	320	30	1	UDP75100
	500+750	320	38	2	UDP75125
	500	320	25	1	UDP10050
	750	320	30	1	UDP10075
	1000	320	36	1	UDP100100
1250	500+500	320	39	2	UDP100102
	500+750	320	41	2	UDP100125
	750	320	37	1	UDP12575
500+750	1000	320	45	2	UDP125100
					UDP125102

Transparent door

H	W	D	Weight	N° of doors	Part No.
500	500	320	16	1	UDPT5050
	750	320	19	1	UDPT5075
750	500	320	20	1	UDPT7550
	750	320	25	1	UDPT7575
1000	1000	320	30	1	UDPT75100
	500	320	25	1	UDPT10050
	750	320	30	1	UDPT10075
1250	750	320	37	1	UDPT12575

	500	750	1000	1250
500				
750				
1000			 	
1250			 	

UDP Dimensions

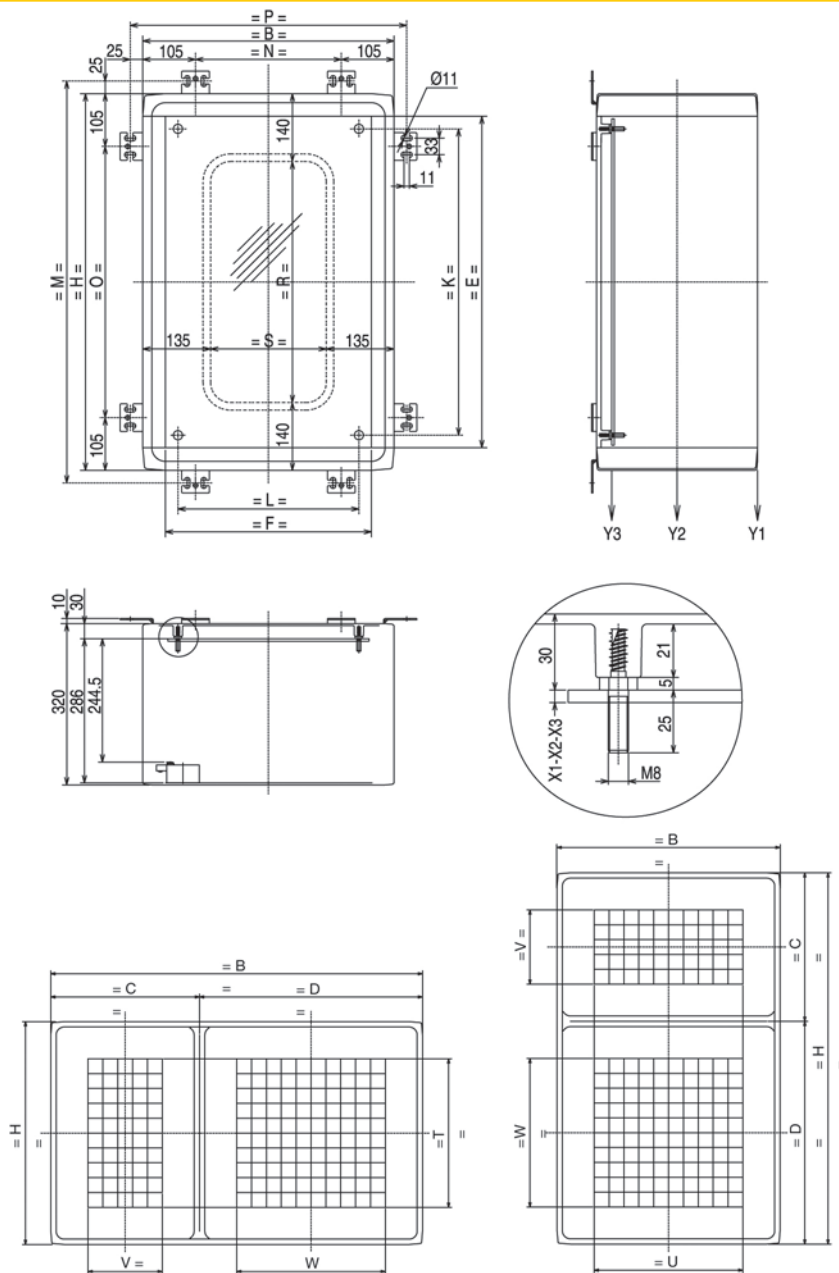

	Enclosure External dimension		Door dimension		Enclosure internal dimension		Mounting plate fixation		Centres for wallmounting				Window surface		Usable mounting space on the doors				Thickness of the MP X1 Pertinax 5 mm. X2 Telequick 2 mm. X3 Pertinax 10 mm.			Admissable charge in Kg				
UDP/UDPT	H	B	C	D	E	F	K	L	M	N	O	P	R	S	T	U	V	W	X1	X2	X3	Y1	Y2	Y3		
UDP 5050	500	500			410	410	360	360	550	290	290	550	220	230	250	250			5	2		8	80	110		
UDP 5075	500	750			410	660	360	610	550	540	290	800	220	480	250	500				5	2		8	80	110	
UDP 7550	750	500			660	410	610	360	800	290	540	550	470	230	500	250				5	2		8	80	110	
UDP 7575	750	750			660	660	610	610	800	540	540	800	470	480	500	500				5	2		8	80	110	
UDP 75100	750	1000			660	910	610	860	800	790	540	1050	470	730	500	750				5	2		6	80	110	
UDP 75125	750	1250	750	750	660		610	1110	800	1040	540	1300			500				5	2		5	80	110		
UDP 10050	1000	500			910	410	860	360	1050	290	790	550	720	230	750	250	250	500	5	2	10	8	80	110		
UDP 10075	1000	750			910	660	860	610	1050	540	790	800	720	480	750	500				5	2		8	80	110	
UDP 100100	1000	1000			910	910	860	860	1050	790	790	1050	720	730	750	750				5	2	10	6	80	110	
UDP 100102	1000	1000			500	500	910		860	860	1050	790	790	1050			750		250	250	5	2	10	6	80	110
UDP 100125	1000	1250			500	750	910		860	1110	1050	1040	790	1300			750		250	500	5	2	10	5	80	110
UDP 12575	1250	750			1160	660	1110	610	1300	540	1040	800	970	480	1000	500			5	2	10	8	80	110		
UDP 125100	1250	1000			500	750	910	1110	860	1300	790	1040	1050				750	250	500	5	2	10	6	80	110	
UDP 125102	1250	1000			500	750	910	1110	860	1300	790	1040	1050				750	250	500	5	2	10	6	80	110	



Uniplast Modular accessories

UMPZ M, Steel Mounting Plate



Description: Steel mounting plate for UDP/UDPT enclosures.

Material: 2mm galvanised steel.

Pack. quantity: 1 piece.

H or W	W or H	h or w	w or h	Part No.
500	500	390	390	UMPZ5050
	750	640	390	UMPZ5075
750	750	640	640	UMPZ7575
	1000	890	640	UMPZ75100
	1250	1140	640	UMPZ75125
1000	500	390	890	UMPZ100500
	1000	890	890	UMPZ100100
	1250	1140	890	UMPZ100125

UMPP M, Insulated mounting plate



Description: Insulated mounting plate for UDP/UDPT enclosures.

Material: 5mm pertinax.

Pack. quantity: 1 piece.

H or W	W or H	h or w	w or h	Part No.
500	500	390	390	UMPP5050
	750	640	390	UMPP5075
750	750	640	640	UMPP7575
	1000	890	640	UMPP75100
	1250	1140	640	UMPP75125
1000	500	390	890	UMPP10050
	1000	890	890	UMPP100100
	1250	1140	890	UMPP100125

UMPB M, Insulated mounting plate 10 mm


Description: Insulated mounting plate for UDP/UDPT enclosures.

Material: 10 mm pertinax.

Pack. quantity: 1 piece.

H or W	W or H	h or w	w or h	Part No.
750	1250	1140	640	UMPB75125
1000	1000	890	890	UMPB100100
	1250	890	890	UMPB100125

UMPT M, Telequick mounting plate



Description: Telequick mounting plate for UDP/UDPT enclosures.

Material: 2mm perforated steel.

Pack. quantity: 1 piece.

For enclosure				
H	W	h	w	Part No.
500	500	390	390	UMPT5050
	750	390	640	UMPT5075
750	500	640	390	UMPT7550
	750	640	640	UMPT7575
	1000	640	890	UMPT75100
	1250	640	1140	UMPT75125
1000	500	890	390	UMPT100500
	750	890	640	UMPT10075
	1000	890	890	UMPT100100
	1250	890	1140	UMPT100125
1250	750	1140	640	UMPT12575
	1000	1140	890	UMPT125100

UPD, Depth adjustment kit



Description: Provides mounting plate adjustment in steps of 12.5mm.

Material: Galvanised steel.

Delivery: 4 brackets, four depth profiles and mounting accessories.

Part No.
UPD01

UMF M, Adjustable vertical mounting profiles



Description: Vertical C-profiles fully adjustable in depth.

Delivery: 4 supporting brackets, 4 depth profiles, 2 vertical C-profiles and mounting accessories.

For enclosure		
H		Part No.
500		UMF500
750		UMF750
1000		UMF1000
1250		UMF1250

Uniplast Modular accessories

URH, Rain hood



Description: Extra protection for outdoor use. Ventilation holes can be drilled in the top of the enclosure and the rain hood will maintain protection rating to IP44/54. Rain hoods require special wall mounting brackets UWB02. Four fixing points for securing rain hood are marked off in top panel. The rain hood cannot be used when the enclosures are joined, some combinations are available on request. Machining is required.

Material: Fibre-glass reinforced polyester.

Finish: RAL 7035.

Delivery: 1 piece with mounting accessories.

For enclosure	W	Part No.
	500	URH5032
	750	URH7532
	1000	URH10032
	1250	URH12532

UWB R, Wall mounting brackets for enclosures with rain hood



Description: Wall mounting brackets for UDP enclosures with rainhood. Can be mounted in horizontal position only. Easy mounting without screws, even with the enclosure finished and closed.

Material: Stainless steel type 304.

Delivery: 4 brackets and four plastic clips.

Part No.
UWB02

UWB S, Standard Wall mounting brackets



Description: Wall mounting brackets for UDP enclosures. Can be mounted in vertical or horizontal position. Easy mounting without screws, even with the enclosure finished and closed. These brackets are supplied as standard with all the UDP/UDPT enclosures.

Material: Stainless steel type 304.

Delivery: 4 brackets and four plastic clips.

Part No.
UWB01

UAF, Adaptor frame for DIN-base



UAF

UMPS

Description: Enclosure and adaptor frame are anchored on the DIN-base.

Material: Fibre-glass reinforced polyester.

Finish: RAL 7035.

Delivery: 1 piece with mounting accessories.

For enclosure	W	D	Part No.
	750	320	UAF7532
	1000	320	UAF10032

UMPS, Polyester DIN-base

Description: DIN-base pedestals.

Material: Fibre-glass reinforced polyester.

Finish: RAL 7035.

Delivery: 1 piece with mounting accessories.

H	W	D	Part No.
900	1110	310	UMPS10032
	780	310	UMPS7532



Uniplast Modular accessories

UPM, Pole mounting kits



Description: At the rear of the enclosure, C-profiles are mounted on the wall mounting brackets UWB, which are included in the enclosure. Around the pole, a steel holding band is installed. On the C-profiles, clamps are placed to fix the holding band securely.
Delivery: Two C-profiles and four clamps. The steel holding band isn't included.

For enclosure		
	W	Part No.
	500	UPM500
	750	UPM750

UDS, Door stop/Panel stop



Description: To secure the door/panel in an open position. Mounted directly to the door and body. Machining is not required.
Material: Steel.
Delivery: 1 piece with mounting accessories.

Description	Part No.
Left turning	UDS01
Right turning	UDS02

UPP, Plinth / Floor mounting frame



Description: Enclosure and plinth are anchored together on the floor. Fixing points for anchoring are marked off on the inside bottom panel.
Material: Fibre-glass reinforced polyester.
Finish: RAL 7035.
Delivery: Plinth, metal braces M12, U-profiles, counter-profiles and mounting accessories.

For enclosure			
H	W	D	Part No.
65	500	320	UPP5032
	750	320	UPP7532
	1000	320	UPP10032
	1250	320	UPP12532

UAV, Air vents




Description: Two air vents must be mounted per enclosure to ensure sufficient air circulation and prevent water condensation. Air vents are preferably mounted in the upper and lower part of the enclosure. Degree protection: IP 44.
Material: Polyamide
Delivery: Set of 2 pieces with mounting accessories.

Part No.
UAV01

Uniplast Modular accessories

UDE, Depth extension kit

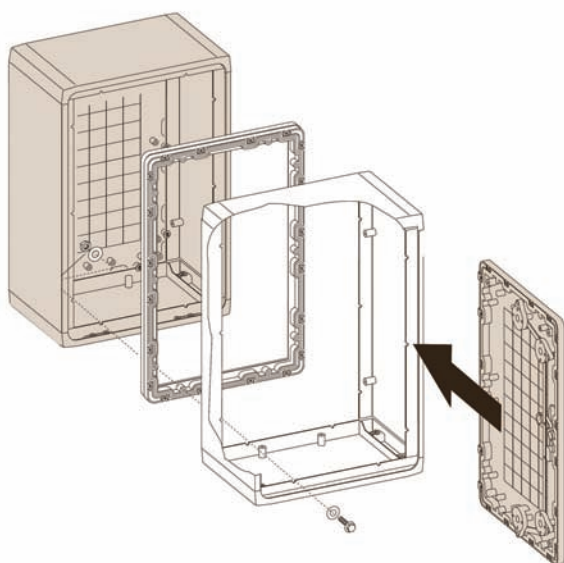



Description: It increases the standard depth (320mm) of the enclosure up to 640mm. When this accessory is used, the rain hood cannot be used.

Finish: RAL 7035

Delivery: 2 side panels, one top and one bottom panel, two open back panels and mounting accessories.

For enclosure		
H	W	Part No.
500	500	UDE5050
	750	UDE5075
	1000	UDE50100
750	500	UDE7550
	750	UDE7575
	1000	UDE75100
1000	500	UDE10050
	750	UDE10075
	1000	UDE100100
1250	500	UDE12550
	750	UDE12575
	1000	UDE125100

UCK, Coupling kit

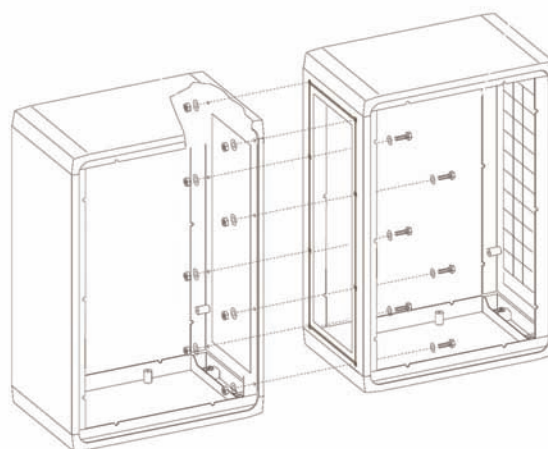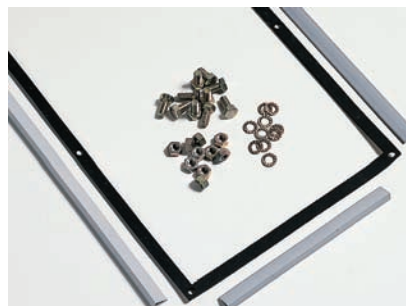

Description: Kit to allow vertical and/or lateral coupling. Machining is required.

Delivery: Neoprene gasket, coupling bolts, protection profiles and mounting accessories.

For enclosure				
D	d	H or W	h or w	Part No.
320	200	500	330	UCK500
		750	580	UCK750
		1000	830	UCK1000
		1250	1080	UCK1250

UCP 1, Corner profile

Description: Fills the corner between two coupled enclosures. Length: 308 mm.

Finish: RAL 7035.

Delivery: 2 pieces.

Part No.
UCP01



Uniplast Modular accessories

UID, Inner door



Description: For controls, meters, lamps, etc. Hinges can be mounted to allow left or right hand opening. Lock DIN 3mm insert.

Material: Fibre-glass reinforced polyester.

Finish: RAL 7035.

Protection: IP 20.

Delivery: 1 piece with mounting accessories.

For enclosure			Part No.
H	W		
500	500		UID5050
	750		UID5075
750	500		UID7550
	750		UID7575
1000	500		UID10050
	750		UID10075

UPCP, Plain cover plate

Description: Mounted in front of mounting plate or mounting frame.

Material: 3mm PVC.

Finish: RAL 7035.

Delivery: 1 piece with mounting accessories.

For enclosure					Part No.
H	W	h	w		
500	500	405	405		UPCP5050
750	500	655	405		UPCP7550
	750	655	655		UPCP7575
1000	500	905	405		UPCP10050
	750	905	655		UPCP10075
	1000	905	905		UPCP10010
1250	750	1155	655		UPCP12575
	1000	1155	905		UPCP12510

UTCP, Transparent cover plate

Description: Mounted in front of mounting plate or mounting frame.

Material: 3mm transparent PVC.

Delivery: 1 piece with mounting accessories.

For enclosure					Part No.
H	W	h	w		
500	500	405	405		UTCP5050
750	500	655	405		UTCP7550
	750	655	655		UTCP7575
1000	500	905	405		UTCP10050
	750	905	655		UTCP10075
	1000	905	905		UTCP10010
1250	750	1155	655		UTCP12575
	1000	1155	905		UTCP12510

UDH M, Handles



UDH 01



UDH 02




UDH 03

Description: Swinghandle to replace the standard one.

Delivery: 1 piece with mounting accessories.

Description	Part No.
For profile half cylinder lock (as replacement)	UDH01
For two profile half cylinder locks	UDH02
For pad-locking (max dim. 10mm)	UDH03

LSSU, Profile half cylinder locks



Description: Profile half cylinder locks. To be used in the swinghandles UDH.

Delivery: 1 piece.

Description	Part No.
Profile half cylinder Ronis key C21323	LSSU521
Square 7mm	LSSU523
Square 8mm	LSSU524
Triangle 7mm	LSSU526
Triangle 8mm	LSSU527
DIN 3mm	LSSU528
DIN 5mm	LSSU529
Daimler Benz	LSSU530
Profile half cylinder Ronis key 2132E	LSSU5212132E
Profile half cylinder Ronis key 3121E	LSSU5213121E

* Other key numbers available on request.