

670AR-2 INTERFACE D EQUIPMENT BUSHING

Up to 24 kV - 1250 A

Application

For use in equipment insulated with oil fluid, typically for transformers, switch gear, capacitors...

Technical characteristics

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV

Design


The equipment bushing is a moulded epoxy insulated part in accordance with CENELEC EN 50180.

Specifications and standards

The bolted type equipment bushings 670AR-2 meet the requirements of IEC 137.

Ordering instructions

To order the equipment bushing, specify the type. The bushing are supplied with an earth lead (/J) or a earth plate (/GS). This earth connection must be specified when ordering.
E.g. K670AR-2/GS.
For use in potentially explosive atmospheres (for 12 kV max.).
Order: -/ATEX.

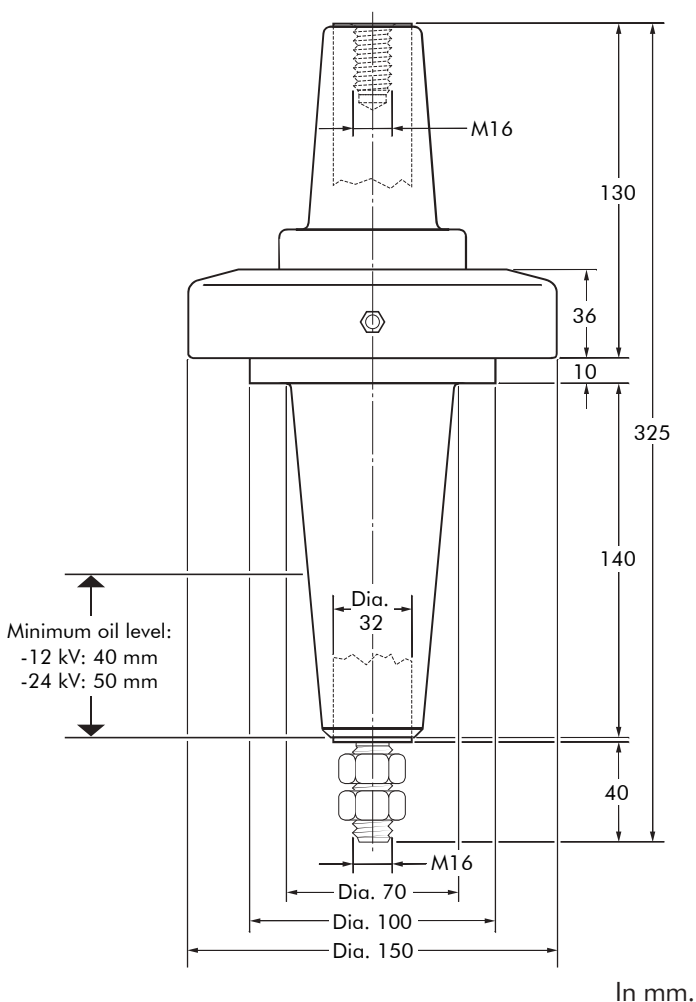

Equipment bushing type	Voltage U_r (kV)	Current I_r (A)
670AR-2	12	1250
K670AR-2	24	1250