




WWW.CABLEJOINTS.CO.UK
 THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
 WWW.THORNEANDDERRICK.CO.UK

Fortress Range

Hinged Door Steel Pillars for Traffic Signal Systems

Specification

- Supplies Traffic Signal Controller
- The pillars have a fully removable door
- Tri-head key wedge lock for added security
- Backboard from 18mm thick treated exterior grade plywood
- Danger warning label fitted in a recess in the door
- Earth lead connection supplied from pillar body to door
- Two door vents
- Optional high quality UV resistant paint, to a minimum thickness of 60 microns
- Fixing bolts, nuts and washers are all stainless steel
- Detachable roof
- Backboard can be removed for wiring
- Tri lock key included
- Two sizes available

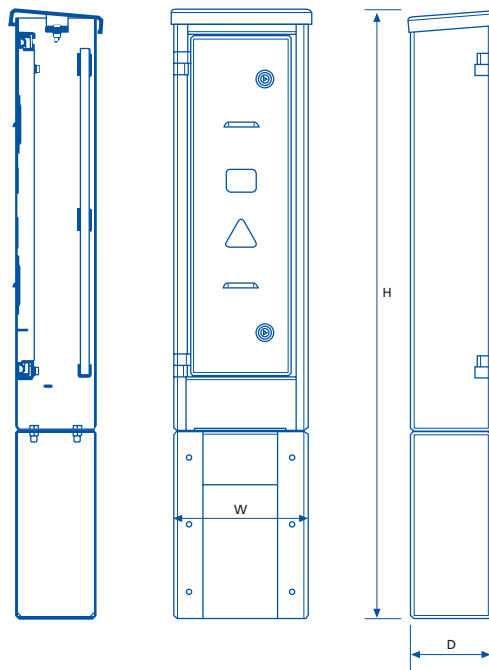

The ordering code consists of 4 sections

Pillar Size (mm)		Material Type		Material Thickness		Options	
Ref.		Ref.		Ref.		Ref.	Complete as required
A	H=1100 W=250 D=150	HDG	Hot Dip Galvanised	3	3mm	PW*	Pre Wired
C	H=1120 W=500 D=200	HDP	Hot Dip Galvanised and Painted (Grey as standard) Other colours available upon request			SL*	Special Locks

*State Components or Lock type required