


EARTH RODS & ACCESSORIES

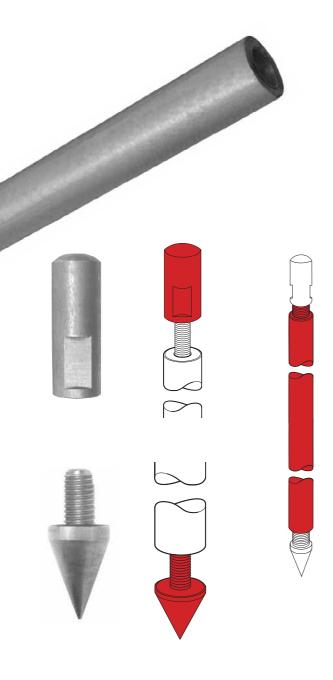

Galvanised Steel Earth Rod Set


This galvanised steel earth rod has a male thread at the top and a female thread at the bottom enabling rods to be joined together.

After machining, the rod is hot-dip galvanised with a coating of zinc not less than 610 g/m². The rod is supplied as a standard set complete with toughened steel driving head, hardened steel driving spike and galvanised steel wire rope grip.

| Nominal Size | L mm | Thread Size (BSF) | D mm | L1 mm | L2 mm | Unit Weight kg | Pack Quantity | Part Number |
|-----------------|---------|-------------------------|-------------|----------|----------|----------------------|------------------|----------------|
| 5/8" | 1200 | 3/8" | 16.5 - 17.0 | 30 | 25 | 2.10 | 5 | ERG 112 |

Material: Mild Steel galvanised to BS EN ISO 1461.





CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS FURSE EARTHING www.cablejoints.co.uk
Thorne and Derrick UK Tel 0044 191 490 1547 Fax 0044 191 477 5371 Tel 0044 117 977 4647 Fax 0044 117 9775582