



DSG-CANUSA

A SHAWCOR COMPANY

CGEL 1000 & 2000

DSG-CANUSA CGEL 1000 & 2000

For fast and reliable installation of Straight and Branch connections for power, control and communication cables in all areas.



CGEL 2000

- Tough outer case with cross linked polymer gel filling which meets class 2 of C.E.I. 64-8 and ANSI C119.90C operating temperature.
- Flame retarded to I.E.C.332-1.
- Resistant to repeated flexing and torsion.
- Unlimited shelf life.
- Available in two complete ranges:
- CGEL 2000, suitable for 30° branch connections on 0.6/1kV extruded cables.
- CGEL 1000, suitable for straight or multiple branch connections on 0.6/1kV extruded cables.




CGEL 1000




WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

PRODUCT	MAIN CABLE C.S.A. (mm ²)	BRANCH CABLE C.S.A.(mm ²)	PRODUCT	MAIN CABLE C.S.A.(mm ²)	BRANCH CABLE C.S.A. (mm ²)
CGEL 1000	1X 2.5-50 2X 2.5-6	1X 1.5-10 2X 1.5	CGEL 2000	1X 2.5-25	1X 1.5-16
CGEL 1001	1X 6-95 2X 1.5-16 3X 1.5-10 4X 1.5-10	1X 1.5-35 2X 1.5-6 3X 1.5-6 4X 1.5-4	CGEL 2001	1X 6-95 2X 1.5-16 3X 2.5-16 4X 2.5-10	1X 1.5-70 2X 1.5-10 3X 1.5-10 4X 1.5-6
CGEL 1002	1X 50-185 2X 10-35 3X 6-35 4X 6-35	1X 16-185 2X 1.5-35 3X 1.5-35 4X 1.5-16	CGEL 2002	1X 50-150 2X 1.5-25 3X 4-25 4X 4-16	1X 1.5-70 2X 1.5-10 3X 1.5-10 4X 1.5-6

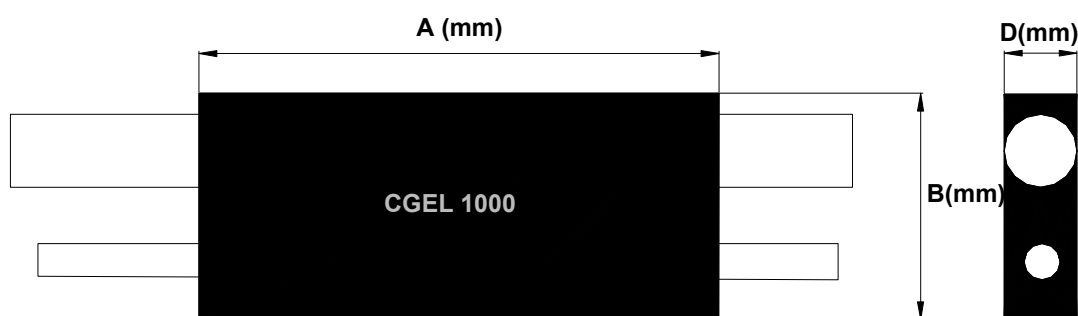

	A	B	D
1000	95	43	28
1001	150	56	28
1002	220	85	46

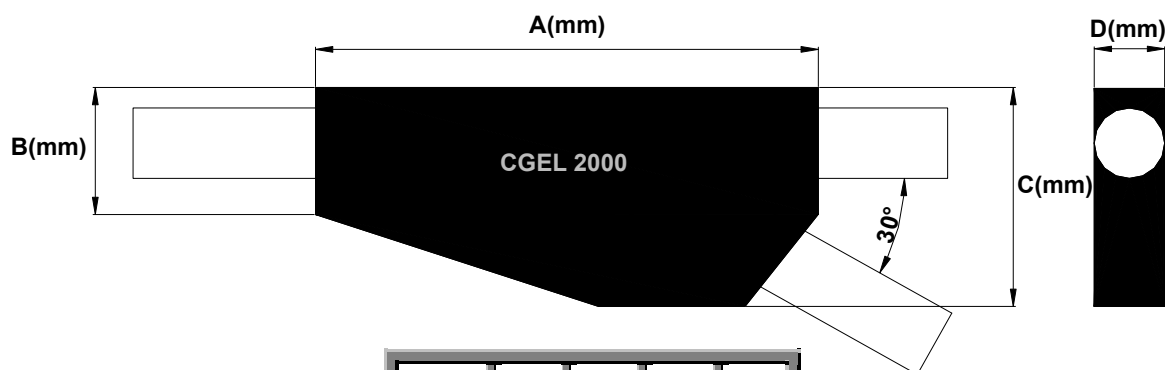

	A	B	C	D
2000	75	30	40	21
2001	125	36	56	35
2002	185	47	75	43