

HW Point Machine Contact Maintenance Kit



Network Rail Acceptance: PA05/04512

A self-contained kit designed for accurate setting of all contacts contained within the HW1000 and HW2000 point machines

Each item in the kit has been carefully designed for ease of use, especially where access is restricted. Ergonomic design of the handles allows for confident handling even with gloved hands.

BENEFITS


- ◆ Self-contained kit is housed in a light plastic carry case with customised polypropylene insert.
- ◆ Round handles are designed for sure handling, even with gloved hands.
- ◆ Angled heads specially designed to provide easy access in the confined spaces.
- ◆ Gauges are constructed to tight tolerances in durable, non-conductive PVC.
- ◆ Each gauge is etched with identifying function and size.

CONTENTS OF KIT

- | | |
|---------------------------------|--------------------|
| ◆ 2.0mm Close Det gauge | Cat No: 086/032074 |
| ◆ 6.3mm Min Motor Contact gauge | Cat No: 086/032075 |
| ◆ 8.0mm Max Motor Contact gauge | Cat No: 086/032076 |
| ◆ Full Kit | Cat No: 086/032073 |
| ◆ Carry Case | Cat No: 086/032077 |

PRODUCT DATA

- | | | | |
|-----------------------|-------------------------|---------------------------|------------------------|
| ◆ Density | 1.41 gm/cm ³ | ◆ Yield point | 53.4 mPa |
| ◆ Tensile strength | 36.2 mPa | ◆ Notched impact strength | 3.41 kJ/m ² |
| ◆ Elongation at break | 26% | ◆ VICAT softening point | 67°C |
| ◆ Elongation at yield | 7.8% | ◆ Working temp range | -5 to +60°C |
| ◆ Shore hardness (D) | 74 | ◆ Fire behaviour (UL94) | VO |

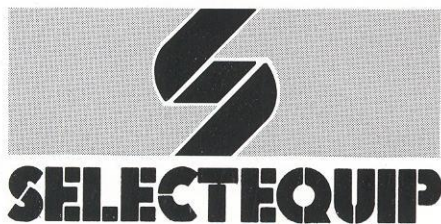

Certificate No. RS 23300

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK