

Floodlight

Zone 1 Ex ed Floodlight

HDL 117



Specification:

Main Body:

Marine Grade Aluminium

Lamp Glass:

Toughened Soda Lime

External Fasteners:

A4 Stainless Steel

T Rating:

T2 and T3

Key Features:

- 150W, 250W and 400W discharge lamps.
- 500W max tungsten halogen lamp.
- Simple Installation.
- Straightforward maintenance.
- Integral control gear.
- Wide choice of voltage options.
- Marine grade aluminium.
- Lightweight.
- Robust.
- Ex e junction box.
- Suitable for use with twin arc lamps.
- Wide beam reflector.

Engineering Solutions
Design to Manufacture

HADAR
LIGHTING



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

Protection:

II 2G Ex de IIB T2/T3 IP56

Certification: ATEX & IEC Ex Certified by SIRA

	Certification	Ambient	Voltage Range	Certificate
HDL 117	II 2G Ex de IIB T2/T3 IP56	150W -20°C to +40°C T3 250W -20°C to +40°C T3 400W -20°C to +40°C T3 (110V, 120V, 220V) 400W -20°C to +40°C T2 (230V, 240V) 500W -20°C to +40°C T2	110V to 240V	IEC Ex SIR 07.0023 SIRA 07 ATEX 1059

Electrical Specifications:

	Electrical Specification		
Lamp Options	Power consumption	Power factor	Power Supply
150W	170W	0.85	220V, 230V, 240V, 50/60 Hz
250W	280W		
400W	435W		
500W	500W		

Installation:

Terminals: Exe terminal chamber with terminal block suitable for looping 6mm² cable.

Cable Entries: 2 x M20. Other entries available on request


Suspension: Steel mounting bracket. See dimensions below for fixing centres.

Installation: Installation document AL10204 supplied.

Ordering Matrix:

Field	Options
Product	HDL 117S
Voltage	22 – 220V 23 – 230V 24 – 240V
Frequency	5 – 50Hz 6 – 60Hz
Cable Entries	00 – 2 x M20 05 – 2 x M25
Lamp Options	150 – 150W 250 – 250W 400 – 400W 500 – 500W
Options	H – MBI Metal Halide E – SON High Pressure Sodium T – Tungsten Halogen

Dimensions:

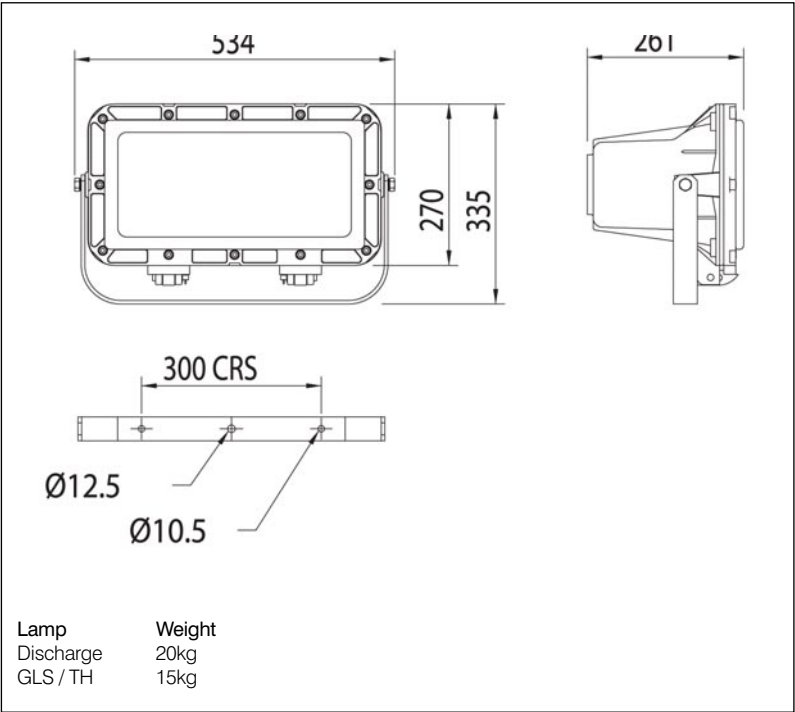

Notes:

- 1) Final Product Code should be in the format: HDL117S24500400E
- 2) For Photometric Data contact the Sales Office.

