

Cable Glands

Hazardous Area


Flameproof Exd & Increased Safety Exe
Dual Certified ATEX / IECEx

ICG 623

87

Application

- Outdoor or indoor use.
- For use with non-armoured elastomer and plastic insulated cables.
- For particular use with:-
 - Cables that are not effectively filled, compact and/or circular, have tape bedding or have hygroscopic fillers.
 - Cables that exhibit 'Cold Flow' characteristics.
 - Enclosures containing an ignition source in gas group IIC areas or containing an ignition source in a Zone 1 area and exceeding 2 litres in volume.
- See technical section for installation rules and regulations.

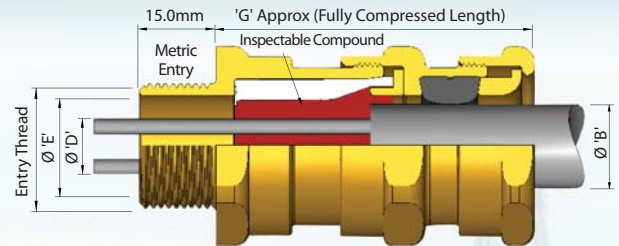

CABLE GLAND SELECTION TABLE


Size Ref.	Entry Thread Size		Cable Acceptance Details							'G'	Hexagon Dimensions	
	Metric	NPT * Standard or Option	Inner Sheath / Cores			Outer Sheath 'B'					Across Flats	Across Corners
			'D ' Max. Over Cores	'E' Max In- ner Sheath	Max. No. of Cores	Standard Seal		Alternative Seal (S)				
						Min.	Max.	Min.	Max.			
Os	M20	½"	8.0	8.0	6	3.0	8.0	-	-	56.4	24.0	26.5
O	M20	½"	8.9	10.0	6	7.5	11.9	-	-	56.4	24.0	26.5
A	M20	¾" or ½"	11.0	12.5	10	11.0	14.3	8.5	13.4	55.8	30.0	32.5
B	M25	1" or ¾"	16.2	18.4	21	13.0	20.2	9.5	15.4	58.8	36.0	39.5
C	M32	1¼" or 1"	21.9	24.7	42	19.0	26.5	15.5	21.2	62.0	46.0	50.5
C2	M40	1½" or 1¼"	26.3	29.7	60	25.0	32.5	22.0	28.0	64.5	55.0	60.6
D	M50	2" or 1½"	37.1	41.7	80	31.5	44.4	27.5	34.8	72.8	65.0	70.8
E	M63	2½" or 2"	47.8	53.5	100	42.5	56.3	39.0	46.5	77.0	80.0	88.0
F	M75	3" or 2½"	59.0	66.2 / 65.3¹	120	54.5	68.2	48.5	58.3	80.7	95.0	104.0

All dimensions in millimetres (except * where dimensions are in inches). Metric entry threads are 1.5mm pitch as standard, 15mm length of thread.

¹ Smaller value is applicable when selecting reduced NPT entry option.

Technical Data

- Flameproof Exd and Increased Safety Exe II 2 GD ExtD A21.
- Certificate No's: Baseefa06ATEX0058X and IECEx BAS 06.0015X.
- Suitable for use in Zone 1, Zone 2, Zone 21, Zone 22 and in Gas Groups IIA, IIB and IIC.
- Construction and Test Standards: IEC/EN 60079-0, IEC/EN 60079-1, IEC/EN 60079-7, IEC/EN 61241-0 and IEC/EN 61241-1.
- Ingress Protection: IP66, IP67 and IP 68 (30 metres for 7 days) to IEC/EN 60529 and NEMA 4X.
- Deluge Protection to DTS01.
- Operating Temperature Range: -60°C to +80°C.
- Assembly Instruction Sheet: AI 305.
- Alternative certification options available:

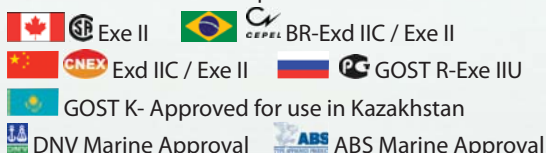

Features

- Provides a barrier seal between the individual insulated cores within the cable and prevents entry of the products of an explosion into the cable.
- Assembly of the cable gland compresses and distributes the compound evenly to create a barrier seal at the point of entry into the enclosure.
- The compound chamber may be separated from the cured compound to ensure that the chamber has been effectively filled. If required, external voids can be repaired.
- Provides a cable retention seal onto the cables outer sheath.
- Manufactured in Brass (standard), Nickel Plated Brass, 316 Stainless Steel or Aluminium.
- Brass NPT entries are nickel plated as standard.

Ordering Information

Format for ordering is as follows: Alternative Seal (S), add suffix S to ordering information.

Cable Gland Type	Size	Thread	(Optional)	Cable Gland Type	Size	Thread	(Optional)
ICG 623	C	M32	S	ICG 623	C	1 ¼" NPT	S

Two part sealing compound and assembly instructions are supplied with the cable gland.