

Modular LED Luminaire

HDL 106

Zone 1 Ex em LED Helideck / Obstruction / Bulkhead Luminaire

Specification:

Main Body:

Marine Grade Aluminium

Diffuser:

Polycarbonate

Gaskets:

Silicone

External Fasteners:

A4 Stainless Steel

Stirrup Bracket:

316 Stainless Steel

T Rating:

T4

Surface Temp:

100°C

Weight:

6.0kg per module



Key Features:

- Modular construction allows the modules to be supplied interlinked with each other to provide greater light output.
- Can be used as a single unit – small floodlight or bulkhead or linked together to replicate a large 250W/400W floodlight.
- Each module utilises 48 off 1.2W LED's
- Integrated power supply.
- Low power consumption.
- Rugged construction – resistant to vibration.
- Independently photometrically tested.
- All units supplied with 2 cable entries.
- IP66 and IP67.
- Optional wired guard available for extra protection.
- Infra red variants available (for use with security cameras).
- Wide, medium and narrow beam light output available.
- Multiple mounting options available.
- Emergency variant available soon.

In comparison to typical Ex d floodlights:

- 60% less weight.
- 50% less power consumption.
- One man installation.
- LED technology will give a predicted lamp life of 10 years+.
- No light pollution.
- Instant start and restrike.
- No light degradation at low temperatures.
- Penetrating white light.
- Photocell option available.
- No flamepaths to maintain.
- Low cost of installation, operation and maintenance.

Engineering Solutions
Design to Manufacture

HADAR
LIGHTING



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

Protection:

II 2GD Ex emb T4 Gb IP66/67, Ex tb IIIC T100°C Db

Certification: ATEX & IEC Ex by SIRA

	Certification	Ambient	Voltage Range	Certificate
HDL106		-20°C to +55°C	110V or 254V input	IEC Ex SIR09.0064

Electrical Specifications:

Electrical Specification			
Lamp Options	Power consumption	Power factor	Available power supplies
48 x 1.2W LED's	80W Max	0.95	110V – 254V 47/63Hz AC/DC
96 x 1.2W LED's	160W Max		
144 x 1.2W LED's	240W Max		


Installation:

Terminals: Up to 4mm² terminals for live, neutral, earth and looping are provided. Internal and external earth as standard.
Cable Entries: 2 x M20, one fitted with approved stopper plug, other entries available on request.
Suspension: Via stirrup bracket, other mounting accessories available.
Installation: Installation document AL10320 supplied.

Ordering Matrix:

Field	Options
Product	HDL106
Version	S – Standard E – Emergency
Version (LEDs)	1 – 48 LEDs 2 – 96 LEDs 3 – 144 LEDs
Voltage	H – 100 - 250V AC only L – 18 - 24V AC/DC
Beam Pattern	W – Wide M – Medium N – Narrow
Mount	H – Horizontal mount V – Vertical mount C – Ceiling mount
Light	W – White light R – Infra red light Y – Yellow light
Cable Entries	0 – M20 5 – M25
Other Options	00 – Colour RAL1018 (Grey) 01 – Colour RAL9004 (Black) 02 – Colour RAL9002 (Grey white) 03 – Colour RAL1018 (Yellow)

Dimensions:

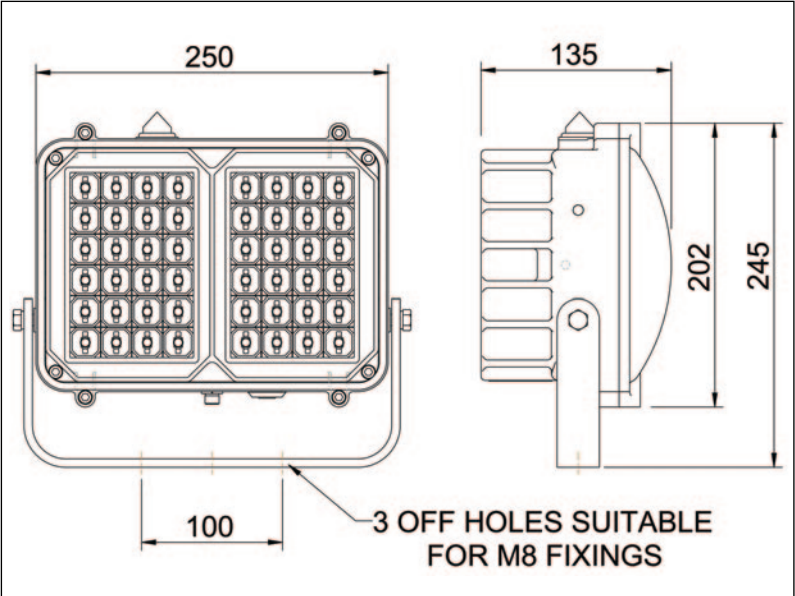

Notes:
1) Typical ordering reference HDL106S48HMH000.
2) For Photometric Data contact the sales office.



Vertical mount