

Certification and Approval



Certification Code	EEx nR II 3GD T3
Certification number	05 ATEX TFZT/01
Certification standard	EN 60079-0, 15
Protection	IP 66

Features


Symmetrical reflector fitted to all versions
Easy lamp access
Robust construction
Directionally adjustable with stirrup mounting bracket

Options


Lamp source variants
Power factor correction
Non standard colour

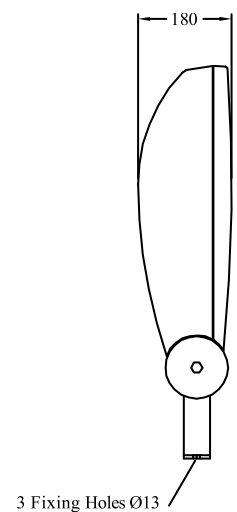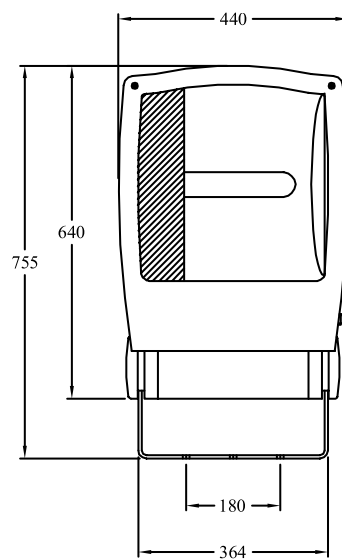


3 Fixing Holes Ø13



Hinged lens opening




Cable entry and
termination block



Adjustable angle
mounting stirrup

Technical Data

Supply Voltage	230v 50Hz standard..
Operating Temperature	-20°C to +30°C standard supply subject to ambient temperature requirements.
Control Gear	Integral within the luminaire and optional power factor correction when fitted.
Lamp Options	Tubular: SON, MBI, Tungsten. 70w to 500w Asymmetrical reflector fitted to all versions. (Lamps not provided)
Cable Entries Terminals	1 x M20 clearance hole in side of body. 2 wire and earth. Cable size 4mm ² max
Mounting Facility	“U” shaped stirrup bracket with angle adjustment mechanism.
Access	Unscrew 2 stainless steel screws in hinged glass retaining frame.
Material	Corrosion resistant die cast aluminium and toughened glass lens.
Finish	2 Pack epoxy paint on primed surface. Standard colour – Aqua .Additional costs for non standard colours.
Weight	19.5Kgs to 21Kgs Lamp dependant.
Features	Symmetrical reflector fitted to all versions Robust construction Directionally adjustable with stirrup mounting bracket
 <p>CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS</p> <p>11KV 33KV CABLE JOINTS & CABLE TERMINATIONS FURSE EARTHING www.cablejoints.co.uk Thorne and Derrick UK Tel 0044 191 490 1547 Fax 0044 191 477 5371 Tel 0044 117 977 4647 Fax 0044 117 9775582</p>	