


Kit No.	Cross Section (mm ²)	A (mm)	B (mm)	C (mm)	L (mm)
91-AHA-21S	4 x 6 to 4 x 16	100	190	20	Half Connector
91-AHA-22S	4 x 25 to 4 x 35	135	320	25	Length
91-AHA-23S	4 x 50 to 4 x 70	160	375	25	Half
91-AHA-24S	4 x 95 to 4 x 150	200	430	30	Connector
91-AHA-25S	4 x 185 to 4 x 240	240	450	30	Length + 5 mm

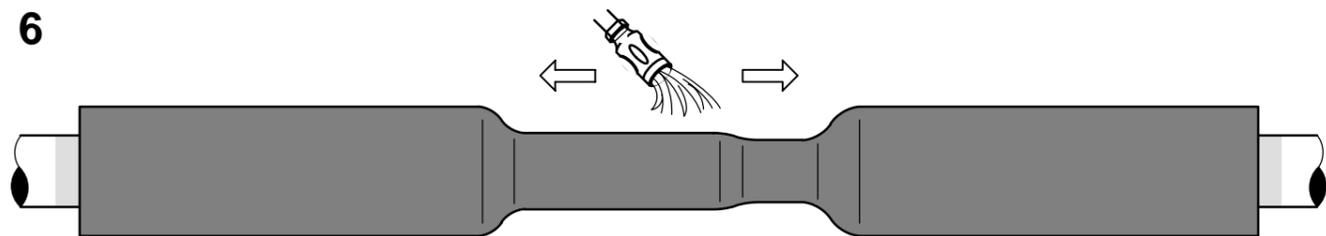

3M LABORATORIES (EUROPE) GMBH, HAMBURG		ISSUE: 1	ISSUE DATE: 07.04.95
ALL STATEMENTS, TECHNICAL INFORMATION AND RECOMMENDATIONS CONTAINED HEREIN ARE BASED ON TESTS WE BELIEVE TO BE RELIABLE HOWEVER, SINCE THE CONDITION OF USE AND THE APPLICATION ARE BEYOND OUR CONTROL THE PURCHASER IS RESPONSIBLE FOR THE PERFORMANCE OF THE SPLICES AND TERMINATIONS MADE IN CONNECTION WITH THE USE OF DATA OR SUGGESTIONS HEREIN.			
DES. ENG.: A. Belhous	1. ISSUE DATE: 07.04.95	3M Heat Shrink Kits 91-AHA-21S up to 91-AHA-25S for low voltage armoured (SWA) and shielded polymeric cable up to 0.6/1 kV	
MOD. ENG.:	1. CHANGE DATE:		
DRAWN: R. Wessel	2. CHANGE DATE:		
CHECKED: D. Hellbusch	3. CHANGE DATE:		
RELEASED: V. Heyna	4. CHANGE DATE:	3M ELECTRICAL PRODUCTS	
		XE 0091-2226-0	