


Low Profile Right Angle Boots

- Helashrink 333F Series, with adapter lip, 90° angle

The boot provides connector strain relief in applications with partially loaded connectors, resulting in small cable diameters requiring a high shrink ratio.



333F322-385 Series supplied / fully recovered.

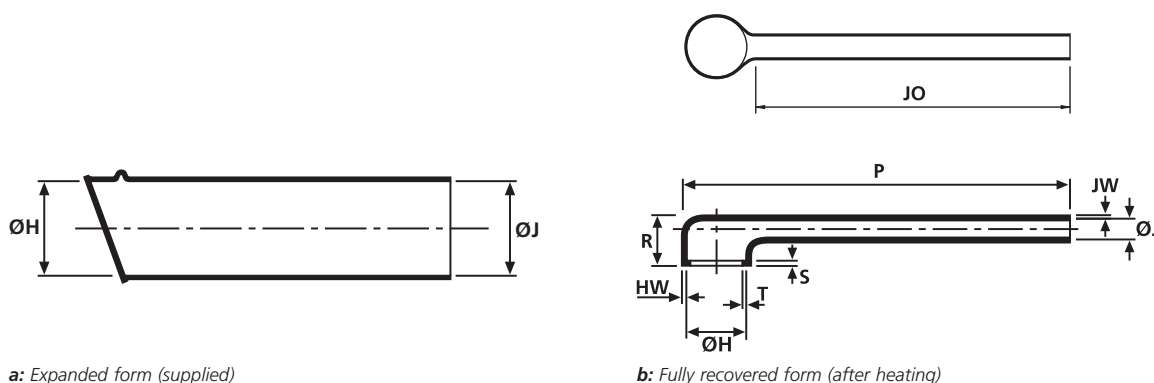

a: Expanded form (supplied)

b: Fully recovered form (after heating)

Sizes and Type Table											
Type	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ±10%	R ± 15%	T ± 0.8	JO ± 10%	HW ± 1.5	JW ± 0.8	S ± 1.5
333F322	23.8	9.9	17.2	6.6	105.1	18.5	1.3	87.6	1.5	1.5	1.5
333F332	27.1	13.2	20.8	7.6	115.8	19.8	1.3	99.0	1.5	1.5	1.5
333F343	30.9	18.5	24.3	8.9	146.3	20.8	1.3	114.3	1.7	1.5	1.7
333F353	35.3	21.6	28.7	10.1	172.2	21.8	1.3	132.5	1.7	1.5	1.7
333F364	38.8	27.9	31.4	10.9	185.1	24.1	1.8	143.7	1.7	1.5	1.7
333F374	45.2	34.0	38.3	12.1	213.6	27.4	1.8	169.0	1.7	1.5	1.7
333F385	51.5	41.1	44.4	15.0	224.5	29.4	1.7	173.2	1.7	1.7	1.7

All dimensions in mm. Subject to technical changes.

For Material / Adhesive selection and other information please refer to page 10.

Combinations "On request"			
Adhesive	Material		
	9	8	6
TSA-200	√	√	√
WM250	√	√	√
W8	√	√	√
W24	√	√	√
V9500	√	√	√
HMT200A	√	√	√
Without Adhesive	√	√	√

Standard combinations	
Article-No.	Type
422-30000	333F322-9
422-30004	333F332-9
422-30100	333F343-9
422-30200	333F353-9
422-30301	333F364-9
422-30400	333F374-9
422-30500	333F385-9