




Insulating sticks for manoeuvring detectors & short-circuiting and earthing systems



This range thus allows a stick-length limitation in case of space requirements and carrying capabilities.

For common applications a series of complete sets including 2 or 3 elements are made to give simple solutions for working distance from 2 to 6 meters.

	Reference				
		smallest end fitting	biggest end fitting	Insulating	
Basic	CM-4610	1.13	—	0.08	1 350
	CM-4615	1.63	—	0.33	1 800
	CM-4620	2.13	—	0.33	2 800
	CM-4625	2.63	—	0.83	3 300
Intermediate	CM-4610-I	1.165	—	0.8	1 300
	CM-4615-I	1.665	—	1.3	1 700
	CM-4620-I	2.165	—	1.8	2 600
	CM-4625-I	2.665	—	2.3	3 100
Terminal	CM-4610-(*)	1.115	1.21	0.78	1 000
	CM-4615-(*)	1.615	1.71	1.28	1 400
	CM-4620-(*)	2.115	2.21	1.78	2 200
	CM-4625-(*)	2.615	2.71	2.28	2 700
Fixed sticks	CM-4115-(*)	1.575	1.675	0.82	1 350
	CM-4120-(*)	2.075	2.175	1.07	1 800
	CM-4125-(*)	2.575	2.675	1.32	2 800
	CM-4130-(*)	3.075	3.175	1.82	3 300

(*) Reference to be completed by fitting: C-E-H-K-T-D.

Reference		
CM-3900-J	0.36	950

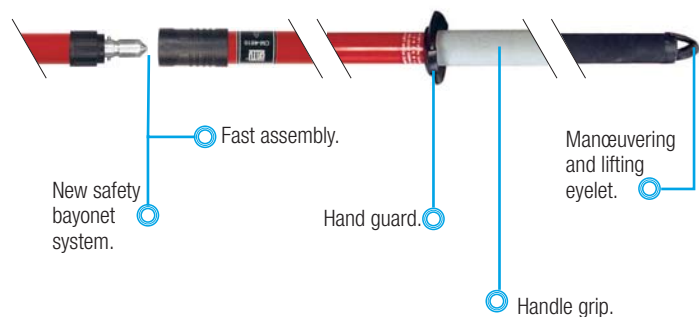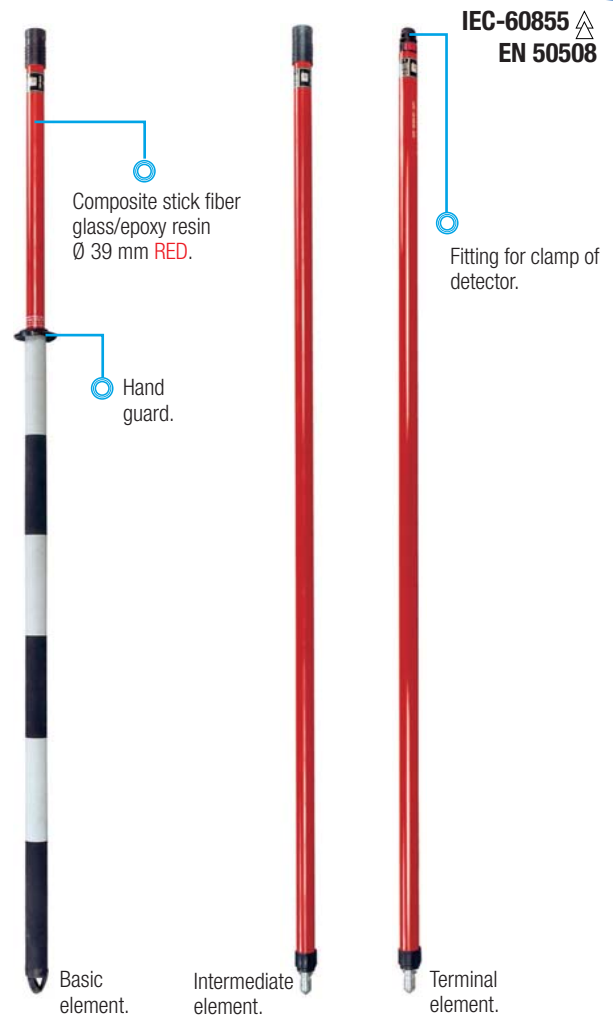

Set of sticks

Complete sets of sticks for common applications.

Reference	Composition	
CM-4220-(*)	2 elements: CM-4610+CM-4610-(*)	2
CM-4230-(*)	2 elements: CM-4615+CM-4615-(*)	3
CM-4240-(*)	2 elements: CM-4620+CM-4620-(*)	4
CM-4345-(*)	3 elements: CM-4615+CM-4615-I+CM-4615-(*)	4.5
CM-4360-(*)	3 elements: CM-4620+CM-4620-I+CM-4620-(*)	6

(*) Reference to be completed by fitting: C-E-H-K-T-D.

 Total length

 Weight

CATU™

T&D

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK