


IP68 TeeTube



Features:

- Tough, robust construction with large cable range acceptance
- Straight through, T splitter and Y splitter versions available
- Dual terminal versions available for easy fitting and looping of conductors (2+2 and 3+3 poles)
- Temperature rating of -20° to +125°

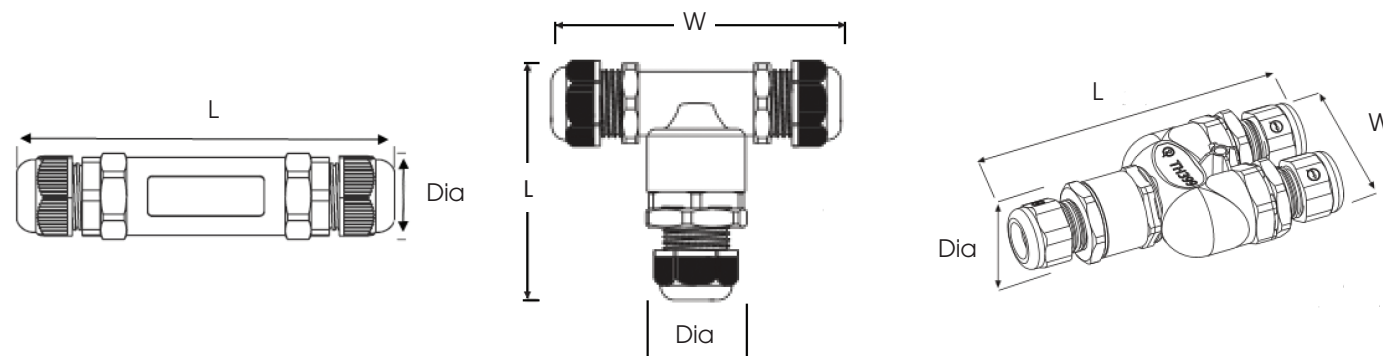

Standard Series

Product Code	IP Rating	Poles	Colour	Material	Cable Entries	Insert Type	W (mm)	Dia (mm)	L (mm)		Min - Max Cable Diameter (mm)	Max Conductor Size (mm ²)	Max Current (A)	Description
TTK20BK-SD	68 to 5Bar	3	Black	Nylon 66	2	Barrier	N/A	26.5	115		5 - 13	4	32	Standard black 3 pole Teetube supplied complete with mounting kit
TTK20GY-SD	68 to 5Bar	3	Grey	Nylon 66	2	Barrier	N/A	26.5	115		5 - 13	4	32	Standard grey 3 pole Teetube supplied complete with mounting kit
TTK20CR-BK	68 to 5Bar	3	Clear	Polycarbonate	2	Barrier	N/A	26.5	115		5 - 13	4	32	Clear tube, black glands 3 pole Teetube supplied complete with mounting kit
TTK25BK-SD	68 to 5Bar	5	Black	Nylon 66	2	Barrier	N/A	32	130		8 - 17	4	32	Standard black 5 pole Teetube supplied complete with mounting kit
TTK25GY-SD	68 to 5Bar	5	Grey	Nylon 66	2	Barrier	N/A	32	130		8 - 17	4	32	Standard grey 5 pole Teetube supplied complete with mounting kit

TH390 Series

THB.390.A1B	68	2	Black	Nylon 66	2	Barrier	N/A	30	82		7 - 13.5	4	32	Miniature in-line cable connector
THB.390.A1A	68	3	Black	Nylon 66	2	Barrier	N/A	30	82		7 - 13.5	4	32	Miniature in-line cable connector
THB.390.C1B	68	2	Black	Nylon 66	3	Barrier	92	30	73		7 - 13.5	4	32	T Style Miniature cable splitter / connector
THB.390.C1A	68	3	Black	Nylon 66	3	Barrier	92	30	73		7 - 13.5	4	32	T Style Miniature cable splitter / connector

TH391, New Mini Teetube series

THB.391.A2A	IP68 to 1bar	2	Black	Nylon 66	2	Barrier		23	68		7-12	4	32	Ultra miniature IP68 2 pole inline cable connector
THB.391.A3A	IP68 to 1bar	3	Black	Nylon 66	2	Barrier		23	68		7-12	4	32	Ultra miniature IP68 3 pole inline cable connector
THB.391.A4A	IP68 to 1bar	4	Black	Nylon 66	2	Barrier		23	68		7-12	4	32	Ultra miniature IP68 4 pole inline cable connector

THB.399 Long Series

THB.399.A3A	68	3	Black	Nylon 66	3	Barrier	63	33	180		7 - 13.5*	4	32	Y Style Cable splitter / connector, long tube
THB.399.A5A	68	5	Black	Nylon 66	3	Barrier	63	33	180		7 - 13.5*	4	16	Y Style Cable splitter / connector, long tube
THB.399.A6A	68	6	Black	Nylon 66	3	Barrier	63	33	180		7 - 13.5*	4	16	Y Style Cable splitter / connector, long tube
THB.399.A9B	68	3 + 3	Black	Nylon 66	3	Through	63	33	180		7 - 13.5*	4	16	Y Style Cable splitter / connector, long tube
THB.399.D3A	68	3	Black	Nylon 66	3	Barrier	63	33	180		8 - 17**	4	32	Y Style Cable splitter / connector, long tube
THB.399.D5A	68	5	Black	Nylon 66	3	Barrier	63	33	180		8 - 17**	4	16	Y Style Cable splitter / connector, long tube
THB.399.D6A	68	6	Black	Nylon 66	3	Barrier	63	33	180		8 - 17**	4	16	Y Style Cable splitter / connector, long tube
THB.399.D9B	68	3 + 3	Black	Nylon 66	3	Through	63	33	180		8 - 17**	4	16	Y Style Cable splitter / connector, long tube

* Was 5mm minimum, but now use accessory 6000087LF for cable ø less than 7mm

** Was 5mm minimum, but now use accessory 6000087LF for cable ø less than 8mm

THB.399 Short Series

THB.399.E3A	68	3	Black	Nylon 66	3	Barrier	63	33	125		7 - 13.5	2.5	25	Miniature Y Style Cable splitter / connector
-------------	----	---	-------	----------	---	---------	----	----	-----	--	----------	-----	----	--


THB.402 Series

THB.402.C1B	68	2	Black	Nylon 66	3	Barrier	92	26	121		7 - 13.5	4	32	T Style Cable splitter / connector, long tube
THB.402.C1A	68	3	Black	Nylon 66	3	Barrier	92	26	121		7 - 13.5	4	32	T Style Cable splitter / connector, long tube
THB.402.C2E	68	3+3	Black	Nylon 66	3	Through	92	26	121		7 - 13.5	4	32	T Style Cable splitter / connector, long tube
THB.402.D1F	68	5	Black	Nylon 66	3	Barrier	92	26 / 32	121		7 - 13.5 (2) / 8 - 17 (1)	4	32	T Style splitter / connector, long tube, 8 - 17mm cable ø, T bar 7 - 13.5mm cable ø
THB.402.D1G	68	6	Black	Nylon 66	3	Barrier	92	26 / 32	121		7 - 13.5 (2) / 8 - 17 (1)	4	32	T Style splitter / connector, long tube, 8 - 17mm cable ø, T bar 7 - 13.5mm cable ø
THB.402.D2E	68	3+3	Black	Nylon 66	3	Through	92	26 / 32	121		7 - 13.5 (2) / 8 - 17 (1)	4	32	T Style splitter / connector, long tube, 8 - 17mm cable ø, T bar 7 - 13.5mm cable ø

Teeplugs



- Features:**
- Up to IP68 versions available
 - Various configurations available
 - Components are keyway coded to ensure correct assembly
 - All products are quick and simple to install
 - Bulkhead/chassis mount options available (depending on product type)
 - Temperature range of –20° to +125°
 - Grey colour available on request

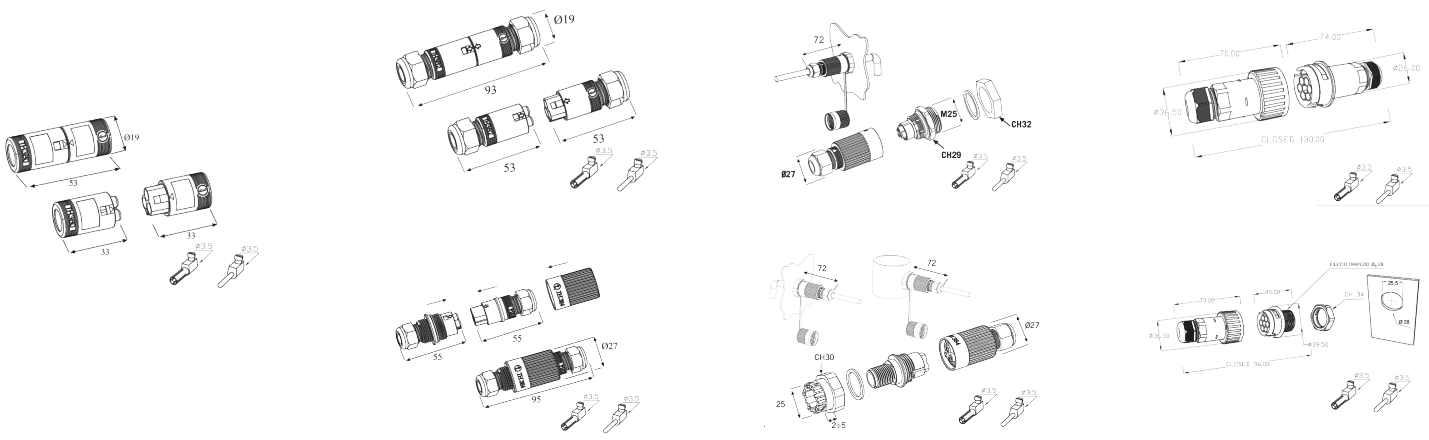

TH380 Series

Product Code	Poles	IP Rating	Colour	Material	Ø (mm)	L (mm)		Min - Max Cable Diameter (mm)	Max Conductor Size (mm ²)	Max Current (A)	Max Voltage (V)	Description
THB.380.A2A	2	20	Black	Nylon 66	19	33		10 Max	4.0	25	400	Plug
THB.380.A1A	3	20	Black	Nylon 66	19	33		10 Max	4.0	25	400	Plug
THB.380.B2A	2	20	Black	Nylon 66	19	33		10 Max	4.0	25	400	Socket
THB.380.B1A	3	20	Black	Nylon 66	19	33		10 Max	4.0	25	400	Socket



TH382 Series

THB.382.A2A	2	40	Black	Nylon 66	19	53		7 - 9.5	4.0	17.5	400	Plug
THB.382.A1A	3	40	Black	Nylon 66	19	53		7 - 9.5	4.0	17.5	400	Plug
THB.382.B2A	2	40	Black	Nylon 66	19	53		7 - 9.5	4.0	17.5	400	Socket
THB.382.B1A	3	40	Black	Nylon 66	19	53		7 - 9.5	4.0	17.5	400	Socket



TH384 Series

THB.384.A2A	2	68	Black	Nylon 66	27	55		7 - 12	4.0	17.5	400	Plug
THB.384.A1A	3	68	Black	Nylon 66	27	55		7 - 12	4.0	17.5	400	Plug
THB.384.B2A	2	68	Black	Nylon 66	27	55		7 - 12	4.0	17.5	400	Socket
THB.384.B1A	3	68	Black	Nylon 66	27	55		7 - 12	4.0	17.5	400	Socket
THB.384.3KIT	3	68	Black	Nylon 66	27	55		7 - 12	4.0	17.5	400	Plug and Socket Kit. Can also be panel mounted with additional M20 locknut.



TH385 Series - Panel Mount connectors, minimum rear profile

THB.385.A2A	2	68	Black	Nylon 66	28	35		N/A	4.0	17.5	400	Chassis mounting plug supplied complete with locknut. For applicable socket see TH384 series
THB.385.A1A	3	68	Black	Nylon 66	28	35		N/A	4.0	17.5	400	Chassis mounting plug supplied complete with locknut. For applicable socket see TH384 series



TH386 Series - Panel Mount - self locking

THB.386.A2A	2	67	Black	Nylon 66	30	35		N/A	4.0	17.5	400	Self locking chassis mounting plug (no rear locknut required but requires locking tool/dust cap). For applicable socket see TH384 series.
THB.386.A1A	3	67	Black	Nylon 66	30	35		N/A	4.0	17.5	400	Self locking chassis mounting plug (no rear locknut required but requires locking tool/dust cap). For applicable socket see TH384 series.
6DB00200C			Black	Nylon 66				N/A				Dust Cap / locking tool

TH387, New Mini TeePlug series

THB.387.A4A	4	IP68	Black	Nylon 67	23	52		7-12	4	17.5	450	Ultra miniature IP68 4 pole cable mount Plug connector for use with TH387 series cable mount or chassis mount power sockets shown in this section.
THB.387.B4A	4	IP68	Black	Nylon 67	23	33		7-12	4	17.5	450	Ultra miniature IP68 4 pole cable mount Socket connector for use with TH387 series cable mount or chassis mount plugs shown in this section
THB.387.C4A	4	IP68	Black	Nylon 67	23	33		7-12	4	17.5	450	Ultra miniature IP68 4 pole chassis mount Plug connector for use with TH387 series cable mount socket connector shown in this section.
THB.387.D4A	4	IP68	Black	Nylon 67	23	33		7-12	4	17.5	450	Ultra miniature IP68 4 pole chassis mount socket connector for use with TH387 series cable mount plug connector shown in this section.



Teeplugs



TH405 Series

Product Code	Poles	IP Rating	Colour	Material	Ø (mm)	L (mm)		Min - Max Cable Diameter (mm)	Max Conductor Size (mm ²)	Max Current (A)	Max Voltage (V)	Description
THB.405.A2B	3	68	Black	Nylon 66	36.5	74		7 - 14	4.0	25	400	Plug
THB.405.A2A	5	68	Black	Nylon 66	36.5	74		7 - 14	4.0	17.5	400	Plug
THB.405.A2E	6	68	Black	Nylon 66	36.5	74		7 - 14	4.0	17.5	400	Plug
THB.405.B2B	3	68	Black	Nylon 66	36.5	70		7 - 14	4.0	25	400	Socket
THB.405.B2A	5	68	Black	Nylon 66	36.5	70		7 - 14	4.0	17.5	400	Socket
THB.405.B2E	6	68	Black	Nylon 66	36.5	70		7 - 14	4.0	17.5	400	Socket
THB.405.A2B-KIT	3	68	Black	Nylon 66	36.5	130		7 - 14	4.0	25	400	Plug & Socket Kit complete with assy tool
THB.405.RPDKIT	5	68	Black	Nylon 66	36.5	130		7 - 14	4.0	17.5	400	Plug & Socket Kit complete with assy tool
600012200	3											3 pole assy tool
600009600	5											5 pole assy tool
6DB00750C	6		Black	Nylon 66								Combined 6 pole assy tool and dust cap

TH406 Series - Panel Mount

THB.406.A1B	3	68	Black	Nylon 66	39.5	40		N/A	4.0	25	400	Chassis mounting plug supplied complete with anti vibration locknut. Mates to TH405 series power socket
THB.406.A1A	5	68	Black	Nylon 66	39.5	40		N/A	4.0	17.5	400	Chassis mounting plug supplied complete with anti vibration locknut. Mates to TH405 series power socket
THB.406.A1E	6	68	Black	Nylon 66	39.5	40		N/A	4.0	17.5	400	Chassis mounting plug supplied complete with anti vibration locknut. Mates to TH405 series power socket

TH405 Series



TH387 Series

