

Insulated Tools

Klein insulated tools maintain the highest level of quality Klein is known for, and they offer added protection against shock from energized sources with voltage up to 1000 volts. Insulated tools from Klein offer superior functionality while reducing the risk of injury.

F O R P R O F E S S I O N A L S S I N C E 1 8 5 7 ®

Insulated Tools




CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582



Introduction – Insulated Tools

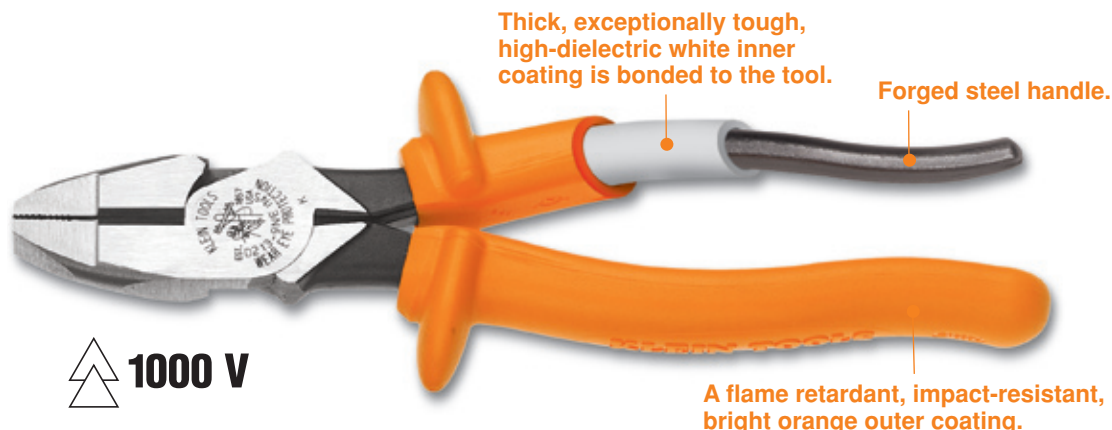

The line of insulated tools incorporates all the Klein quality design and construction features that professionals have relied on. The tools combine excellent functionality along with reduction of risk of injury where a tool might make contact with an energized source with voltage up to 1000 volts.

All catalog numbers for Klein insulated tools have the suffix “INS” and are marked with the official international 1000-volt rating symbol. Not all tools with plastic coatings or plastic handles provide protection against electrical shock. **Only use those tools that are marked with the official international 1000-volt rating symbol, as shown, if there is any chance that the tool will make contact with an energized source.**

- All Klein insulated tools comply with the IEC 60900 and ASTM F1505 standards for insulated tools, and are clearly marked with the 1000-volt rating symbol.
- The large, bright orange handles make the tool comfortable to use all day and easy to identify in the field.
- The insulation on each tool consists of two layers. The high-dielectric white inner layer is a thick, exceptionally tough base coating which is bonded to the tool. The outer layer is a flame-resistant, bright orange color.

Insulated Pliers

Features:



▲ **WARNING:** Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



▲ **WARNING:** Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

▲ **WARNING:** Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

▲ **WARNING:** Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

▲ **WARNING:** Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.

Insulated High-Leverage Side-Cutting Pliers

Additional Features:

- Individually tested to exceed standards.
- High-leverage design provides 46% greater cutting and gripping power than other plier designs.
- Streamlined design with sure-gripping, cross-hatched knurled jaws.




Cat. No.	Nose Type	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Finish	Handle Color	Weight (lbs.)
D213-9NE-INS	New England	9-5/8" (245 mm)	1-19/32" (41 mm)	1-5/16" (33 mm)	5/8" (16 mm)	25/32" (20 mm)	insulated	orange	1.25
2000 Series* – Heavy-duty cutting knives									
D2000-9NE-INS	New England	9-5/8" (245 mm)	1-19/32" (41 mm)	1-5/16" (33 mm)	5/8" (16 mm)	25/32" (20 mm)	insulated	orange	1.25

*Cuts ACSR, screws, nails, and most hardened wire. Features combination polished and black-oxide finish.

Insulated High-Leverage Side-Cutting Pliers – Connector Crimping

Additional Features:

- Individually tested to exceed standards.
- Crimping die behind hinge for superior leverage.

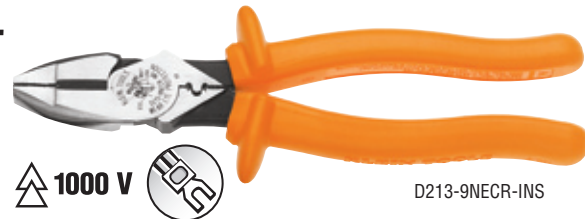

Cat. No.	Nose Type	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Finish	Handle Color	Weight (lbs.)
D213-9NECR-INS	New England	9-5/8" (245 mm)	1-19/32" (41 mm)	1-5/16" (33 mm)	5/8" (16 mm)	25/32" (20 mm)	insulated	orange	1.24

Insulated Universal Side-Cutting Pliers – Connector Crimping

Additional Features:

- Individually tested to exceed standards.
- Crimping die behind hinge for superior leverage crimping non-insulated connectors, lugs and terminals.
- Toothed pipe grip for greater power.



Cat. No.	Nose Type	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Finish	Handle Color	Weight (lbs.)
12098-INS	Universal	8-7/8" (225 mm)	1-25/32" (45 mm)	1-1/32" (26 mm)	1/2" (13 mm)	3/4" (19 mm)	insulated	orange	.89

Insulated High-Leverage Diagonal-Cutting Pliers

Additional Features:

- Individually tested to exceed standards.
- High-leverage design. Rivet is closer to the cutting edge for 36% greater cutting power than other plier designs.



Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Cutting Knives	Handle Finish	Handle Color	Weight (lbs.)
D228-8-INS	8-1/4" (210 mm)	13/16" (21 mm)	1-3/16" (30 mm)	7/16" (11 mm)	standard	insulated	orange	.74
2000 Series* – Heavy-duty cutting knives								
D2000-28-INS	8-1/4" (210 mm)	13/16" (21 mm)	1-3/16" (30 mm)	7/16" (11 mm)	standard	insulated	orange	.74

*Cuts ACSR, screws, nails, and most hardened wire. Features combination polished and black-oxide finish.

All dimensions are in inches and (millimeters).

WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Insulated Pliers

Insulated High-Leverage Diagonal-Cutting Pliers – Angled Head

Additional Features:

- Individually tested to exceed standards.
- Angled head for easier work in confined spaces.
- High-leverage design. Rivet is closer to the cutting edge for 36% greater cutting power than other plier designs.



D248-8-INS

Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Cutting Knives	Handle Finish	Handle Color	Weight (lbs.)
D248-8-INS	8-1/4" (210 mm)	13/16" (21 mm)	1-3/16" (30 mm)	7/16" (11 mm)	standard	insulated	orange	.74
2000 Series* – Heavy-duty cutting knives								
D2000-48-INS	8-1/4" (210 mm)	13/16" (21 mm)	1-3/16" (30 mm)	7/16" (11 mm)	standard	insulated	orange	.74

*Cuts ACSR, screws, nails, and most hardened wire. Features combination polished and black-oxide finish.

Insulated Heavy-Duty Diagonal-Cutting Pliers – Tapered Nose

Additional Features:

- Individually tested to exceed standards.
- Heavy-duty tapered nose design.
- One-inch deep jaws easily reach into confined spaces.



D220-7-INS

Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Cutting Knives	Handle Finish	Handle Color	Weight (lbs.)
D220-7-INS	7-7/8" (200 mm)	1" (25 mm)	31/32" (25 mm)	1/2" (13 mm)	standard	insulated	orange	.66

Insulated Heavy-Duty Long-Nose Pliers – Side-Cutting

Additional Features:

- Individually tested to exceed standards.
- Induction hardened cutting knives for long life.
- Heavier design for easier, more comfortable cutting.
- Extended handles provide added reach and leverage.
- Cat. No. D203-8N-INS has skinning hole for No. 12 AWG wire.



D203-8N-INS

Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Point Thickness	Handle Finish	Handle Color	Weight (lbs.)
D203-8-INS	8-7/8" (225 mm)	2-5/16" (59 mm)	1" (25 mm)	1/2" (13 mm)	5/8" (16 mm)	1/8" (3 mm)	insulated	orange	.73
D203-8N-INS	8-7/8" (225 mm)	2-5/16" (59 mm)	1" (25 mm)	1/2" (13 mm)	5/8" (16 mm)	1/8" (3 mm)	insulated	orange	.73

All dimensions are in inches and (millimeters).

⚠WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



⚠WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

⚠WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

⚠WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

⚠WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Insulated Pliers

Insulated Standard Long-Nose Pliers – Side-Cutting

Additional Features:

- Individually tested to exceed standards.
- Induction hardened cutting knives for long life.
- Knurled jaws for sure wrapping and looping.
- Curved handles provide greater tool control.

1000 V



D203-7-INS

Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Point Thickness	Handle Finish	Handle Color	Weight (lbs.)
D203-6-INS	6-7/8" (175 mm)	1-15/16" (49 mm)	11/16" (17 mm)	3/8" (10 mm)	1/2" (13 mm)	3/32" (2 mm)	insulated	orange	.35
D203-7-INS	7-3/8" (187 mm)	2-7/16" (62 mm)	11/16" (17 mm)	3/8" (10 mm)	1/2" (13 mm)	3/32" (2 mm)	insulated	orange	.37

Insulated Pump Pliers

Additional Features:

- Individually tested to exceed standards.
- Secure tongue and groove design for non-slip grip – even with heavy pressure.

1000 V



D502-10-INS

Cat. No.	Overall Length	Max. Jaw Capacity	Handle Finish	Handle Color	Weight (lbs.)
D502-10-INS	10-1/4" (260 mm)	1-3/4" (44 mm)	insulated	orange	1.09

Insulated Crimping/Cutting Tool

Insulated Crimping/Cutting Tool

Additional Features:

- Individually tested to exceed standards.
- Insulated crimping tool with tapered nose designed for working in confined spaces.
- Crimping dies marked for insulated and non-insulated solderless terminals and connectors.
- Accommodates wire from No. 10 to 22 AWG.
- Wire cutter in nose.

1000 V



1005-INS

Cat. No.	Overall Length	Crimps	Handle Color	Weight (lbs.)
1005-INS	9-3/4" (248 mm)	10 to 22 AWG	orange	1.05

Insulated Cable Cutter

Insulated High-Leverage Cable Cutter

Additional Features:

- Individually tested to exceed standards.
- Special, high-leverage design for exceptional cutting capability.
- Cable-gripping shear-type jaws.
- Precision, one-hand shearing action.
- Perfect for working in confined spaces.

1000 V



63050-INS

⚠ WARNING: Do NOT use to cut steel or ACSR.

Cat. No.	Overall Length	Cuts Up to	Handle Color	Weight (lbs.)
63050-INS	9-5/8" (245 mm)	4/0 aluminum, 2/0 soft copper, 100-pair 24 AWG communications wire	orange	1.04

All dimensions are in inches and (millimeters).

⚠ WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



⚠ WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

⚠ WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

⚠ WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

⚠ WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Insulated Stripper/Cutters

Insulated Wire Stripper/Cutter

Additional Features:

- Individually dielectrically tested.
- Gauges, cuts, strips, and loops wire.
- Spring-loaded for self-opening.
- Compact, lightweight wire-stripping, cutting tool.
- Narrow nose fits into tight places.
- Do not use for cutting steel wire or bolts.
- Hardened spring steel with precision-ground stripping holes for easy removal of insulation.

 1000 V



11049-INS

Cat.No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
11045-INS	7" (178 mm)	10, 12, 14, 16, 18 solid AWG (4.0 mm ² , 2.5 mm ² , 1.5 mm ² , 1.0 mm ² , 0.75 mm ²)	orange	.70
11049-INS	7" (178 mm)	8, 10, 12, 14, 16 stranded AWG (6.0 mm ² , 4.0 mm ² , 2.5 mm ² , 1.5 mm ² , 1.0 mm ²)	orange	.70

Insulated Wire Stripper/Cutter KLEIN-KURVE

Additional Features:

- Individually tested to exceed standards.
- Cuts, strips, loops and gauges both solid and stranded wire.
- Spring-loaded for self-opening.
- Serrated nose for easy bending, shaping and pulling of wire.
- Cleanly shears 6-32 and 8-32 screws.
- Do not use for cutting steel wire.

SOLID **STRANDED**

 1000 V



11055-INS

Cat.No.	Overall Length	Strips and Cuts	Handle Color	Weight (lbs.)
11055-INS	8" (203 mm)	10, 12, 14, 16, 18 AWG solid 12, 14, 16, 18, 20 AWG stranded	orange	.75

Insulated Screwdrivers and Nut Drivers

Features:

 1000 V

Klein insulated tools exceed the IEC 60900 and ASTM F1505 standards, for insulated tools, and are clearly marked with the official 1000-volt rating symbol.

Custom,
US-made
tool steel.



Two layers of insulation provide protection against electric shock.

Patented Tip-Ident® quickly identifies nut driver size.



All dimensions are in inches and (millimeters).

⚠ WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.

 1000 V

⚠ WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

⚠ WARNING: Do NOT use screwdrivers to pry or chisel.

⚠ WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

⚠ WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

⚠ WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.

Insulated Screwdrivers and Nut Drivers

Insulated Keystone-Tip – Heavy-Duty Round-Shank Screwdrivers

Additional Features:

- Individually tested to exceed standards.
- Tips are precision ground to fit screw openings securely and resist slippage.
- Cushion-Grip handles for greater torque and comfort.



Cat. No.	Shank Tip Width	Shank Length	Overall Length	Weight (lbs.)
602-4-INS	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)	.30
602-6-INS	5/16" (8 mm)	6" (152 mm)	10-15/16" (278 mm)	.40
602-10-INS	3/8" (10 mm)	10" (254 mm)	15-7/16" (392 mm)	.66

Insulated Cabinet-Tip – Round-Shank Screwdrivers

Additional Features:

- Individually tested to exceed standards.
- Cushion-Grip handles for greater torque and comfort.
- Perfect for electrical, telephone and work in recessed holes and other tight spaces.



Cat. No.	Shank Tip Width	Shank Length	Overall Length	Weight (lbs.)
601-4-INS	3/16" (5 mm)	4" (102 mm)	7-3/4" (197 mm)	.17
601-6-INS	3/16" (5 mm)	6" (152 mm)	9-3/4" (248 mm)	.19
601-8-INS	3/16" (5 mm)	8" (203 mm)	11-3/4" (298 mm)	.21

Insulated Phillips-Tip – Round-Shank Screwdrivers

Additional Features:

- Individually tested to exceed standards.
- Cushion-Grip handles for greater torque and comfort.
- Tips are profilated to provide a more consistent geometric symmetry than conventional Phillips-tip screwdrivers.



Cat. No.	Point Size	Shank Length	Overall Length	Weight (lbs.)
603-3-INS	No. 1	3" (76 mm)	6-3/4" (171 mm)	.16
603-4-INS	No. 2	4" (102 mm)	8-5/16" (211 mm)	.30
603-6-INS	No. 3	6" (152 mm)	11" (279 mm)	.40

Insulated, Square-Recess-Tip Screwdriver – Round-Shank

Additional Features:

- Individually tested to exceed standards.
- Round shank with square-recess tip.
- Cushion-Grip handle for greater torque and comfort.



Cat. No.	Point Size	Shank Length	Overall Length	Weight (lbs.)
666-INS	No. 2	8" (203 mm)	12-5/16" (313 mm)	.35

All dimensions are in inches and (millimeters).

▲WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



▲WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

▲WARNING: Do NOT use to pry or chisel.

▲WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

▲WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

▲WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Insulated Nut Drivers

Insulated Cushion-Grip, Hollow-Shaft Nut Drivers

Additional Features:

- Individually tested to exceed standards.
- Cushion-Grip handles for greater torque and comfort.
- Handle caps are color-coded for easy size identification.
- Strong hex-head drives nuts and socket screws.
- Insulated, full hollow-shaft permits turning nuts on long screws.



630-5/8-INS

Cat. No.	Color Code	Hex Size	Shank Length	Overall Length	Weight (lbs.)
630-3/16-INS	black	3/16"	3" (76 mm)	6-3/4" (171 mm)	.17
630-1/4-INS	red	1/4"	3" (76 mm)	6-3/4" (171 mm)	.18
630-5/16-INS	yellow	5/16"	3" (76 mm)	6-3/4" (171 mm)	.18
630-11/32-INS	green	11/32"	3" (76 mm)	6-3/4" (171 mm)	.19
630-3/8-INS	blue	3/8"	3" (76 mm)	6-3/4" (171 mm)	.20
630-7/16-INS	brown	7/16"	3" (76 mm)	7-5/16" (186 mm)	.26
630-1/2-INS	red	1/2"	3" (76 mm)	7-5/16" (186 mm)	.28
630-9/16-INS	orange	9/16"	4" (102 mm)	9-3/8" (238 mm)	.40
630-5/8-INS	yellow	5/8"	4" (102 mm)	9-3/8" (238 mm)	.43

Cat. No.	Color Code	Hex Size	Shank Length	Overall Length	Weight (lbs.)
646-3/16-INS	black	3/16"	6" (152mm)	9-3/4" (238 mm)	.22
646-1/4-INS	red	1/4"	6" (152mm)	9-3/4" (238 mm)	.23
646-5/16-INS	yellow	5/16"	6" (152mm)	9-3/4" (238 mm)	.23
646-11/32-INS	green	11/32"	6" (152mm)	9-3/4" (238 mm)	.24
646-3/8-INS	blue	3/8"	6" (152mm)	9-3/4" (238 mm)	.25
646-7/16-INS	brown	7/16"	6" (152mm)	9-3/4" (238 mm)	.31
646-1/2-INS	red	1/2"	6" (152mm)	10-5/16" (262 mm)	.33
646-9/16-INS	orange	9/16"	6" (152mm)	11-3/8" (289 mm)	.45
646-5/8-INS	yellow	5/8"	6" (152mm)	11-3/8" (289 mm)	.48

Insulated Skinning Knife

Insulated Cable/Lineman's Skinning Knife

- Individually tested to exceed standards.
- Two layers of insulation provide protection against electric shock.
- Extra-strong construction for line work.
- Tough, tempered-steel blade provides maximum sharpness and durability to withstand frequent cable scoring.
- Rugged insulated handle provides a firm, comfortable grip and has large finger guard.



1570-3LR-INS

Cat. No.	Blade Length	Handle Color	Nominal Overall Length	Weight (lbs.)
1570-3LR-INS	2-1/4" (57 mm)	orange	7-3/4" (197 mm)	.40

Insulated Screwdriver Sets

2-Piece 4" Insulated Screwdriver Set

- Thick, exceptionally tough high-dielectric white inner coating is bonded to the steel.
- Bright orange outer coating is flame and impact resistant.
- Patented Tip-Ident® quickly identifies screwdriver type and tip orientation.
- Individually tested to exceed standards.



33532-INS

Cat. No.	Set Contains					Weight (lbs.)
33532-INS						.60
	Cat. No.	Description	Shank Tip Width	Shank Length	Overall Length	
	602-4-INS	round-shank, keystone-tip	1/4" (6 mm)	4" (102 mm)	8-5/16" (211 mm)	
	603-4-INS	round-shank, profilated Phillips-tip	No. 2	4" (102 mm)	8-5/16" (211 mm)	

⚠ WARNING: Do NOT use to pry or chisel.

All dimensions are in inches and (millimeters).

⚠ WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



⚠ WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

⚠ WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

⚠ WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

⚠ WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Insulated Tool Kits

General-Purpose Insulated 22-Piece Tool Kit

- Individually tested to exceed standards.
- Two layers of insulation provide protection against electric shock.
- A comprehensive assortment of 22 insulated tools.
- The custom case includes three pallets with custom-fitted pockets for each tool, piano-hinged cover has both a combination lock and two key-locked latches for security, storage space behind the pallets to keep important papers and accessory items.
- Case's inside dimensions are:
17-3/4" W x 14-1/4" D x 8" H
(451 mm x 362 mm x 203 mm).
- Overall case dimensions are:
18-7/8" W x 15-3/8" D x 8-1/4" H
(479 mm x 391 mm x 210 mm).
- Replaceable case available Cat. No. 33537.



See individual tool listings for more details.



33527

Cat. No.	Kit Contains		Weight (lbs.)	
33527			24.30	
	Cat. No.	Description	Cat. No.	Description
	D2000-9NE-INS	insulated side-cutting pliers	602-6-INS	insulated keystone – heavy-duty round-shank screwdriver (5/16" x 6")
	12098-INS	insulated side-cutting pliers	602-10-INS	insulated keystone – heavy-duty round-shank screwdriver (3/8" x 10")
	D2000-28-INS	insulated diagonal-cutting pliers	603-3-INS	insulated Phillips – round-shank screwdriver (No. 1)
	D2000-48-INS	insulated diagonal-cutting pliers – angled head	603-4-INS	insulated Phillips – round-shank screwdriver (No. 2)
	D203-8N-INS	insulated heavy-duty long-nose pliers – side-cutting	603-6-INS	insulated Phillips – round-shank screwdriver (No. 3)
	D220-7-INS	insulated diagonal-cutting pliers – tapered nose	D502-10-INS	insulated pump pliers
	D203-6-INS	insulated long-nose pliers – side-cutting	11045-INS	insulated wire stripper/cutter
	D203-7-INS	insulated long-nose pliers – side-cutting	63050-INS	insulated high-leverage cable cutter
	601-4-INS	insulated cabinet – round-shank screwdriver (3/16" x 4")	1570-3LR-INS	insulated cable/lineman's skinning knife
	601-6-INS	insulated cabinet – round-shank screwdriver (3/16" x 6")	1005-INS	insulated crimping/cutting tool
	601-8-INS	insulated cabinet – round-shank screwdriver (3/16" x 8")	33537	extra-sturdy, bright-yellow case
	602-4-INS	insulated keystone – heavy-duty round-shank screwdriver (1/4" x 4")		

All dimensions are in inches and (millimeters).

▲WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



▲WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

▲WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

▲WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

▲WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Utility Insulated 13-Piece Tool Kit

- Individually tested to exceed standards.
- Two layers of insulation provide protection against electric shock.
- An assortment of 13 professional, insulated tools.
- The custom case includes two pallets with custom-fitted pockets for each tool, piano-hinged case cover has both a combination lock and two key-locked latches for security, storage space behind the pallets to keep important papers and accessory items.
- Case's inside dimensions are: 17-3/4" W x 14-1/4" D x 8" H (451 mm x 362 mm x 203 mm).
- Overall case dimensions are: 18-7/8" W x 15-3/8" D x 8-1/4" H (479 mm x 391 mm x 210 mm).
- Replaceable case available Cat. No. 33535.



Cat. No.	Kit Contains	Weight (lbs.)
33525		20.05

Cat. No.	Description
D2000-9NE-INS	insulated side-cutting pliers
D2000-28-INS	insulated diagonal-cutting pliers
D2000-48-INS	insulated diagonal-cutting pliers – angled head
D203-8-INS	insulated heavy-duty long-nose pliers – side-cutting
602-4-INS	insulated keystone – heavy-duty round-shank screwdriver (1/4" x 4")
602-6-INS	insulated keystone – heavy-duty round-shank screwdriver (5/16" x 6")
602-10-INS	insulated keystone – heavy-duty round-shank screwdriver (3/8" x 10")
603-3-INS	insulated Phillips – round-shank screwdriver (No. 1)



33525

603-6-INS	insulated Phillips – round-shank screwdriver (No. 3)
63050-INS	insulated high-leverage cable cutter
D502-10-INS	insulated pump pliers
1570-3LR-INS	insulated cable/lineman's skinning knife
33535	extra-sturdy, bright-yellow case
603-4-INS	insulated Phillips – round-shank screwdriver (No. 2)

Insulated 8-Piece Tool Kits

- Individually tested to exceed standards.
- Two layers of insulation provide protection against electric shock.
- Compact assortment of eight popular insulated tools.
- Highly durable, black, nylon case features: coil-zipper closure, polypropylene handles, custom-fitted tool pockets.
- Overall case dimensions are: 15-1/2" W x 11" D x 2-1/2" H (394 mm x 279 mm x 64 mm).
- Replaceable case available Cat. No. 33536.



Premium Insulated 8-Piece Tool Kit

Cat. No.	Kit Contains	Weight (lbs.)
33529	Premium Insulated Tool Kit	6.90

Cat. No.	Description
D2000-9NE-INS	insulated side-cutting pliers
D2000-48-INS	insulated diagonal-cutting pliers
D203-8N-INS	insulated heavy-duty long-nose pliers – side-cutting
601-6-INS	insulated cabinet – round-shank screwdriver (3/16" x 6")
602-4-INS	insulated keystone – heavy-duty round-shank screwdriver (1/4" x 4")
603-4-INS	insulated Phillips – round-shank screwdriver (No. 2)
63050-INS	insulated high-leverage cable cutter
11055-INS	insulated wire stripper/cutter
33536	heavy-duty polyester case



33529

See individual tool listings for more details.

All dimensions are in inches and (millimeters).

⚠WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



⚠WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

⚠WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

⚠WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

⚠WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Basic Insulated 8-Piece Tool Kit

Cat. No.	Kit Contains	Weight (lbs.)
33526	Basic Insulated Tool Kit	6.90
Cat. No.	Description	
D213-9NE-INS	insulated side-cutting pliers	
D228-8-INS	insulated diagonal-cutting pliers	
D203-8N-INS	insulated heavy-duty long-nose pliers – side-cutting	
601-6-INS	insulated cabinet – round-shank screwdriver (3/16" x 6")	
602-4-INS	insulated keystone – heavy-duty round-shank screwdriver (1/4" x 4")	
603-4-INS	insulated Phillips – round-shank screwdriver (No. 2)	
63050-INS	insulated high-leverage cable cutter	
11045-INS	insulated wire stripper/cutter	
33536	heavy-duty polyester case	

Basic Insulated 8-Piece Tool Kit II

Cat. No.	Kit Contains	Weight (lbs.)
33531	Basic Insulated Tool Kit II	6.90
Cat. No.	Description	
D213-9NE-INS	insulated side-cutting pliers	
D228-8-INS	insulated diagonal-cutting pliers	
D203-8N-INS	insulated heavy-duty long-nose pliers – side-cutting	
601-6-INS	insulated cabinet – round-shank screwdriver (3/16" x 6")	
602-4-INS	insulated keystone – heavy-duty round-shank screwdriver (1/4" x 4")	
603-4-INS	insulated Phillips – round-shank screwdriver (No. 2)	
D502-10-INS	insulated pump pliers	
11045-INS	insulated wire stripper/cutter	
33536	heavy-duty polyester case	

Cushion-Grip Insulated 9-Piece Screwdriver Kit

- Individually tested to exceed standards.
- Two layers of insulation provide protection against electric shock.
- Nine-piece insulated screwdriver assortment with three sizes of each tip style: cabinet, keystone, and Phillips.
- Highly durable, black, nylon case features: coil-zipper closure, polypropylene handles, custom-fitted tool pockets, extra pocket is provided for storage of papers or other items.
- Overall case dimensions are: 15-1/2" W x 11" D x 2-1/2" H (394 mm x 279 mm x 64 mm).
- Replaceable case available Cat. No. 33538.



Cat. No.	Kit Contains	Weight (lbs.)
33528		5.40
Cat. No.	Description	
601-4-INS	insulated cabinet – round-shank screwdriver (3/16" x 4")	
601-6-INS	insulated cabinet – round-shank screwdriver (3/16" x 6")	
601-8-INS	insulated cabinet – round-shank screwdriver (3/16" x 8")	
602-4-INS	insulated keystone – heavy-duty round-shank screwdriver (1/4" x 4")	
602-6-INS	insulated keystone – heavy-duty round-shank screwdriver (5/16" x 6")	
602-10-INS	insulated keystone – heavy-duty round-shank screwdriver (3/8" x 10")	
603-3-INS	insulated Phillips – round-shank screwdriver (No. 1)	
603-4-INS	insulated Phillips – round-shank screwdriver (No. 2)	
603-6-INS	insulated Phillips – round-shank screwdriver (No. 3)	
33538	heavy-duty polyester case	



33528

See individual tool listings for more details.

All dimensions are in inches and (millimeters).

▲WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



▲WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

▲WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

▲WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

▲WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.



Insulated Tool Kits

Cushion-Grip Insulated 9-Piece Nut Driver Kits

- Individually tested to exceed standards.
- Two layers of insulation provide protection against electric shock.
- Nine-piece insulated nut driver assortment of popular sizes.
- Highly durable, black, nylon case features: oil-zipper closure, polypropylene handles, custom-fitted tool pockets, extra pocket is provided for storage of papers or other items.
- Overall case dimensions are: 15" W x 12-3/4" x 3-1/2" (381 mm x 324 mm x 89 mm).
- Replaceable case available Cat. No. 33534.

See individual tool listings for more details.



33523



33524

Cat. No.	Kit Contains	Weight (lbs.)
33523		5.40
Cat. No.	Description	
630-3/16-INS	insulated 3/16" hollow shaft nut driver, 3" shaft	
630-1/4-INS	insulated 1/4" hollow shaft nut driver, 3" shaft	
630-5/16-INS	insulated 5/16" hollow shaft nut driver, 3" shaft	
630-11/32-INS	insulated 11/32" hollow shaft nut driver, 3" shaft	
630-3/8-INS	insulated 3/8" hollow shaft nut driver, 3" shaft	
630-7/16-INS	insulated 7/16" hollow shaft nut driver, 3" shaft	
630-1/2-INS	insulated 1/2" hollow shaft nut driver, 4" shaft	
630-9/16-INS	insulated 9/16" hollow shaft nut driver, 4" shaft	
630-5/8-INS	insulated 5/8" hollow shaft nut driver, 4" shaft	
33534	Custom heavy-duty Cordura® case	

Cordura® is a registered trademark of INVISTA for durable fabrics.

Cat. No.	Kit Contains	Weight (lbs.)
33524		5.40
Cat. No.	Description	
646-3/16-INS	insulated 3/16" hollow shaft nut driver, 6" shaft	
646-1/4-INS	insulated 1/4" hollow shaft nut driver, 6" shaft	
646-5/16-INS	insulated 5/16" hollow shaft nut driver, 6" shaft	
646-11/32-INS	insulated 11/32" hollow shaft nut driver, 6" shaft	
646-3/8-INS	insulated 3/8" hollow shaft nut driver, 6" shaft	
646-7/16-INS	insulated 7/16" hollow shaft nut driver, 6" shaft	
646-1/2-INS	insulated 1/2" hollow shaft nut driver, 6" shaft	
646-9/16-INS	insulated 9/16" hollow shaft nut driver, 6" shaft	
646-5/8-INS	insulated 5/8" hollow shaft nut driver, 6" shaft	
33534	Custom heavy-duty Cordura® case	

Cordura® is a registered trademark of INVISTA for durable fabrics.

All dimensions are in inches and (millimeters).

⚠WARNING: Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



⚠WARNING: Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

⚠WARNING: Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

⚠WARNING: Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

⚠WARNING: Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.

