

MODEL No.

S-24

Cuts steel materials as well as cables
up to 24 mm



SPECIFICATIONS

Maximum handle load : 274 N
Single stage pumping
Relief valve is not equipped
Reservoir capacity : 70 cc

Output force : 76 kN

SIZE

430 (L) mm


WEIGHT

4.0 kg

ACCESSORIES

Carrying bag

S-24

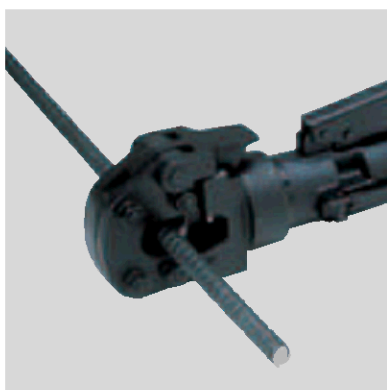

S-24 shown with Reinforcing rod

FEATURES

Light weight portable hydraulic cutter features :

- * Guillotine type cutting for less jamming than shear type cutting
- * No set-up time required
- * All blades are easily replaceable
- * 180 degree rotating head allows for easy cutting positions
- * Flip-top latch for easy insertion of cutting material

REMARKS

Cutting of piano wire is prohibited.

Cutting capacity

Wire rope 6 x 7	: 18 mm
Wire rope 6 x 12	: 24 mm
Wire rope 6 x 19	: 24 mm
Soft steel bar	: 20 mm
Reinforcing rod	: 16 mm
Cu strands	: 24 mm
Al strands	: 24 mm
ACSR	: 24 mm
Guy wire 1 x 7	: 20 mm
Guy wire 1 x 19	: 20 mm
CCP cable	: N/A



WWW.CABLEJOINTS.CO.UK

THORNE & DERRICK UK

TEL 0044 191 490 1547 FAX 0044 477 5371

TEL 0044 117 977 4647 FAX 0044 977 5582

WWW.THORNEANDDERRICK.CO.UK