



TOP ACCESSORIES


Clamp for bare conductors Al./Cu 16 - 120 mm² Cat. No 1701

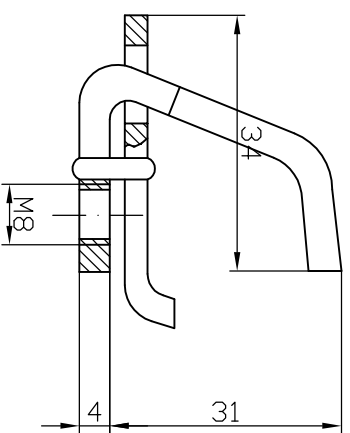


Clamp A for insulated conductors Cat. No 1702

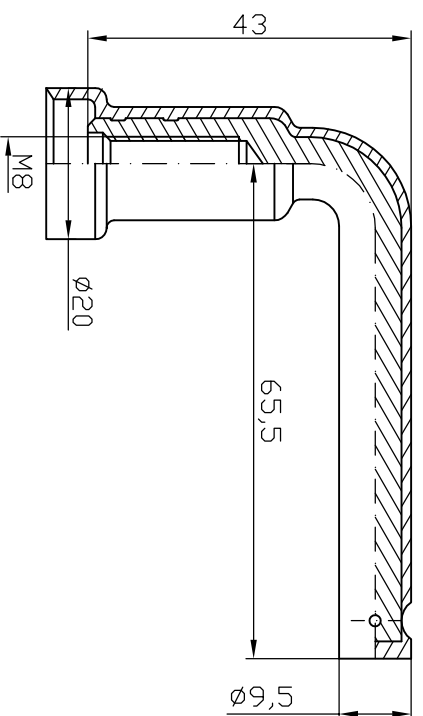

Clamp B for insulated conductors Cat. No 1704

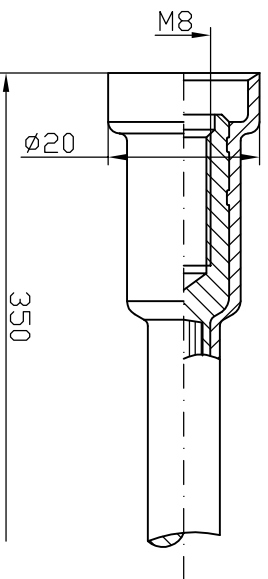

Insulation piercing terminal ENSTO 45.1 Cat. No 1705-1

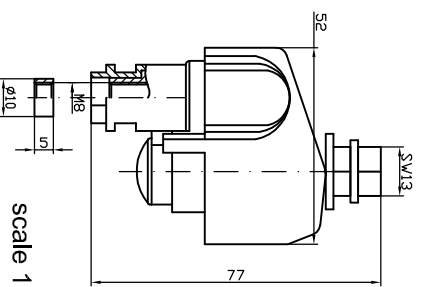

scale 1:2

SURGE ARRESTER LOVOS

1. Nominal discharge current I_n



5 kA	
10 kA	

II. Continuous operating voltage U_c

280V	
440V	
500V	
660V	


III. Disconnecting device

Yes	
No	

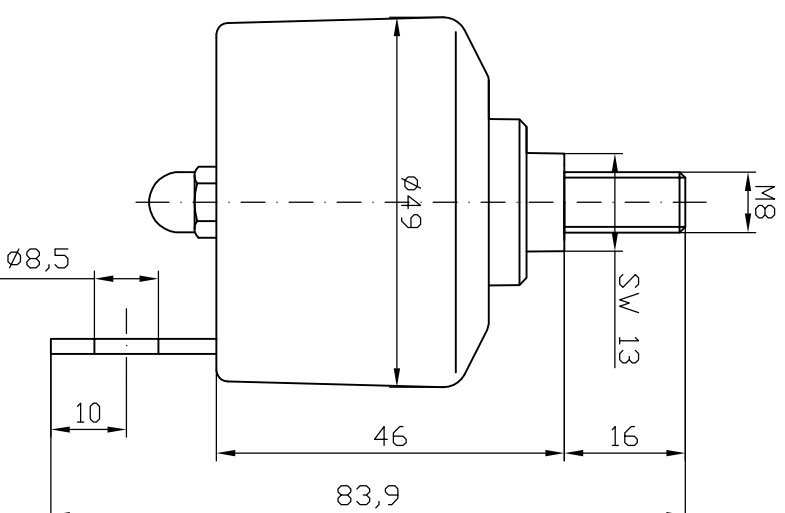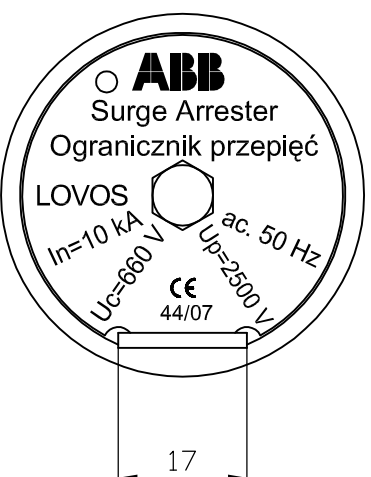

EARTH ACCESSORIES

Insulated cable Cu 6 mm² Cat. No 2711-x-y

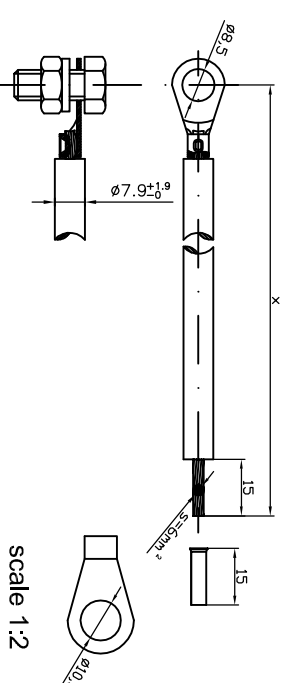


scale 1:2

x - length from 300 mm up to 1000 mm, each segment 100 mm
y - T with protective sleeve ending H6/15;

K with cable eye ending 10-6


Insulated cable Cu 16 mm² Cat. No 2712-x-y

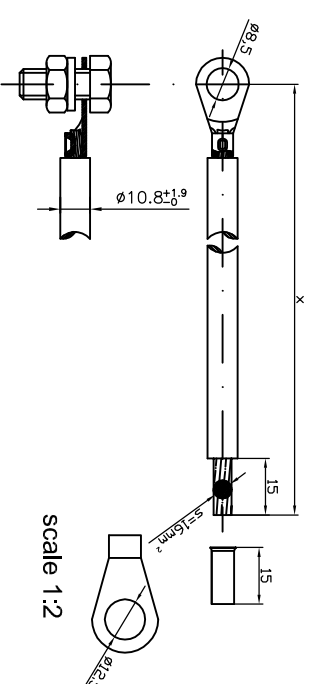


scale 1:2

x -	length from 300 mm up to 1000 mm, each segment 100 mm
y -	T with protective sleeve ending H16/15;
K	with cable eye ending 12-16

K with cable eye ending 12-16

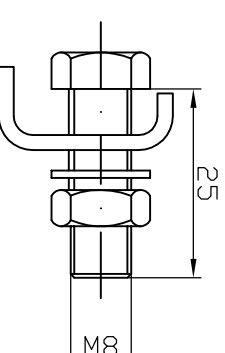Flat clamp Al/Cu 6-50 mm² Cat. No 2719

Bracket terminal Cat. No 2720

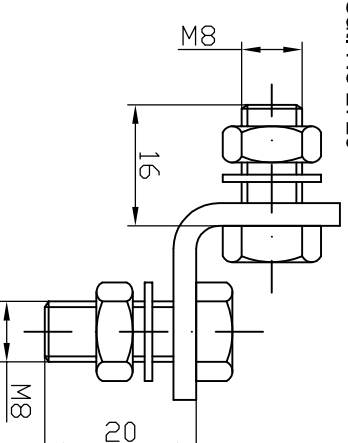

WWW.CABLEJOINTS.CO.UK

THORNE & DERRICK UK

TEL 0044 191 490 1547 FAX 0044 477 5371

WWW.THORNEANDDERICK.CO.UK

ABB Sp. z o.o. Power Products

2GKG930A00

Size A3

Language

Page	
------	--

1

Pages

1