



**INDUSTRIAL FUSE-LINKS WITH KNIFE BLADE CONTACTS LSPN**

**500 Volt NH-System Fuse-Links with Knife Blade Contacts to IEC60269-2**  
 Rated voltage: 500V a.c. Breaking range and utilization category: gG Rated breaking capacity: 120kA at 500V a.c.

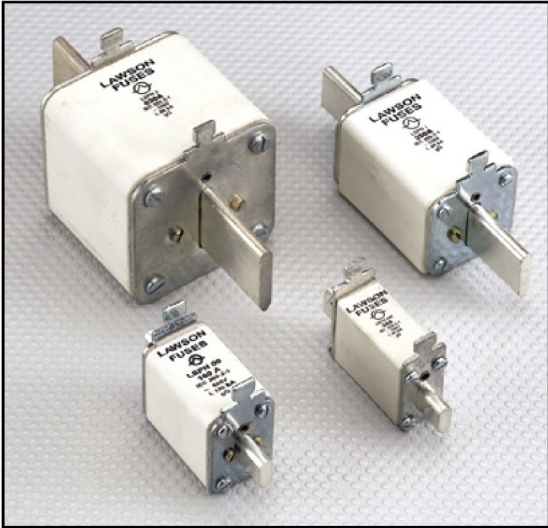

**Current ratings and principal dimensions**

Size	Type Reference	Current Rating (A)	Dimensions (mm)						
			a1	a2	a3	a4	b	e1	e2
000	LSPN	6 10 16 20 25 32 40 50 63	78.5	54	45	49	15	39	29
00	LSPN	10 16 20 25 32 40 50 63 80 100	78.5	54	45	49	15	38	29
		125 160						45	29
0	LSPN	32 40 50 63 80 100	125	68	62	68	15	38	29
		125 160						45	29
1	LSPN	32 40 50 63 80 100 125 160	135	75	62	68	20	45	29
		200 250						50	44
2	LSPN	40 50 63 80 100 125 160 200 250	150	75	62	68	25	50	44
		315 250 400						58	50
3	LSPN	315 400 500 630	150	75	62	68	32	73	71



- Also available.**
1. Ranges of Fuse-Links for motor circuit and semi conductor protection are also available
  2. A range of Fuse-Bases and accessories are also available.

**D FUSE-LINKS TYPE LD**

**500 Volt Diazed Fuse-Links to IEC60241 • IEC60269-3 • DIN-VDE 0636 Part 31**  
 Rated voltages: 500V a.c. Breaking range and utilization category: gG Rated breaking capacities: 50kA a.c.



**Current ratings and principal dimensions**

List References		Current Rating (A)	Principal Dimensions	
Slow Acting	Quick Acting		Length mm	Diameter mm
LD12	LD12Q	2 4 6 10 16 20 25	50	12
LD22	LD22Q	2 4 6 10 16 20 25	50	22
LD27	LD27Q	35 40 63	50	27
LD37	LD37Q	80 100	63	37
LD51	-	125 160 200	66	51

- Also available.**
1. Ranges of Fuse-Links for motor circuit and semi conductor protection are also available
  2. A range of Fuse-Bases and accessories are also available.

**DO FUSE-LINKS TYPE LNZ**

**400 Volt Neozed Fuse-Links to IEC60269-3 • DIN-VDE 0636 Part 41**  
 Rated voltages: 400V a.c., 250V d.c. Breaking range and utilization category: gG Rated breaking capacities: 50kA a.c., 8kA d.c.



- Also available.**
1. Ranges of Fuse-Links for motor circuit and semi conductor protection are also available
  2. A range of Fuse-Bases and accessories are also available.

**Current ratings and principal dimensions**

List References	Current Rating (A)	Principal Dimensions	
		Length mm	Diameter mm
400V a.c.			
LNZ11-400	2 4 6 10 16	36	11
LNZ15-400	20 25 35 50 63	36	15
LNZ22-400	80	43	22



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
 FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS  
 FURSE EARTHING  
 www.cablejoints.co.uk  
**Thorne and Derrick UK**  
 Tel 0044 191 490 1547 Fax 0044 191 477 5371  
 Tel 0044 117 977 4647 Fax 0044 117 9775582