


## STREET LIGHTING CUT-OUT FUSE-LINKS

## TYPE LST

### 230/240 Volt Street Lighting Cut-Out Fuse-Links to BS88: Part 1 • IEC60269-1

Rated voltage: 240V a.c. Breaking range and utilization category: gG Rated breaking capacity: 20kA at 240V a.c.

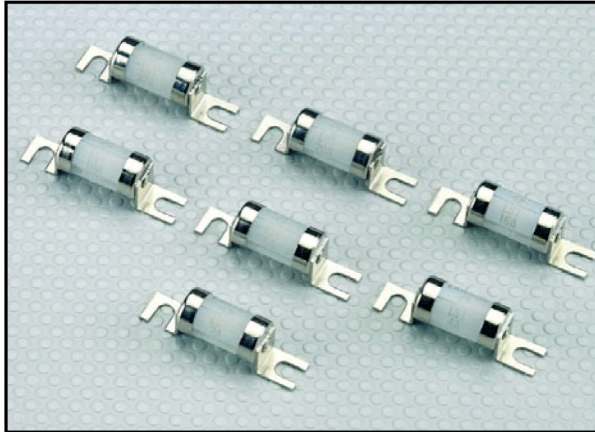


Lawson Type "LST" fuse-links are for use in single-phase street lighting cut-outs or similar installations. These fuse-links comply with UK Electricity Supply Industry Standards and BS7654.

Leading authorities, including Lloyds Register of Shipping and Electricity Supply Authorities, have approved fuse-links within this range.

A complementary range of solid/neutral links is available to suit our fuse-link range.

#### Current ratings and fixing centre

| Current Rating (A) | List Reference | Fixing Centre (mm) | Carton Quantity | Carton Weight (Kg) |
|--------------------|----------------|--------------------|-----------------|--------------------|
| 2                  | LST2           | 38.5               | 10              | 0.12               |
| 4                  | LST4           |                    |                 |                    |
| 6                  | LST6           |                    |                 |                    |
| 10                 | LST10          |                    |                 |                    |
| 16                 | LST16          |                    |                 |                    |
| 20                 | LST20          |                    |                 |                    |
| 25                 | LST25          |                    |                 |                    |
| 32                 | LST32          |                    |                 |                    |

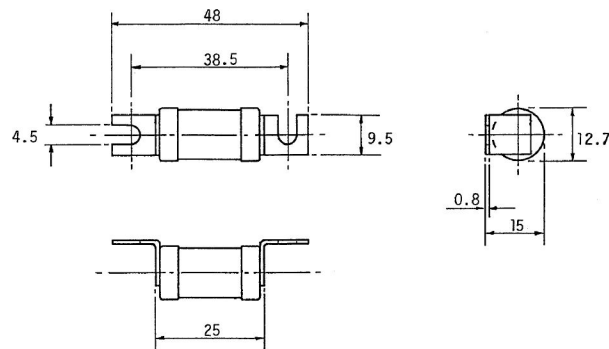

Dimensions = mm



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS



11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

[www.cablejoints.co.uk](http://www.cablejoints.co.uk)

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582