




RGB

RGBO with removable end

RGB is a frame for casting or bolting to a wall or floor. It has a standard internal width of 120 mm and is 60 mm deep, available in four standard sizes, 2, 4, 6 & 8. The frame is manufactured 60x60x6 mm angle.

For installations where cables are already in place specify the RGBO frame which has a removable end.

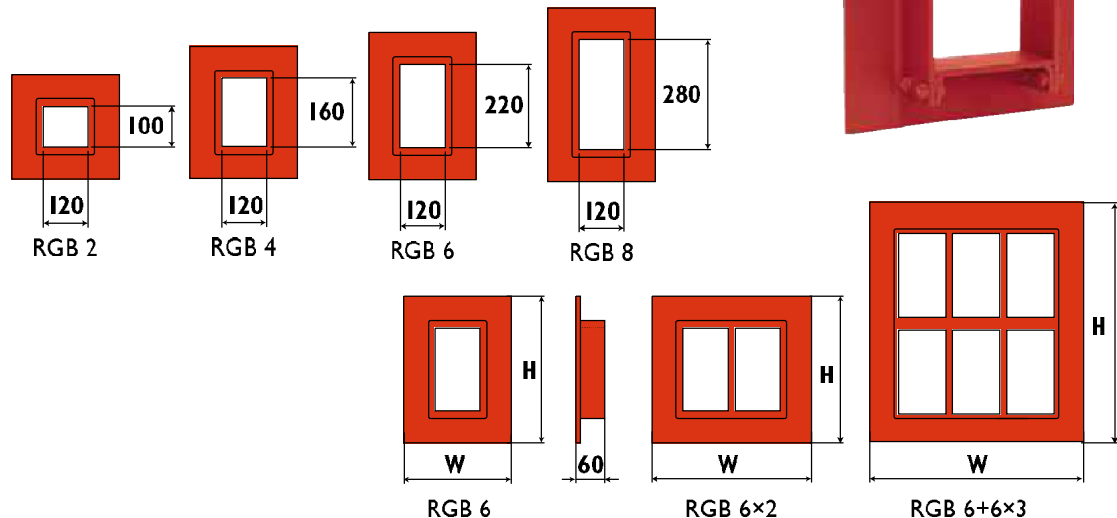

	221	240.5	371	501.5	632	762.5	893	W = 110+ 130.5 x n	3.2	5.1	7.1	9.0	11.0	12.9
	279.5	"	"	"	"	"	"		3.9	6.1	8.3	10.5	12.7	14.9
	338	"	"	"	"	"	"		4.5	6.9	9.4	11.8	14.2	16.7
	396.5	"	"	"	"	"	"		5.2	7.9	10.7	13.5	16.2	19.0
RGB-2+2	332	"	"	"	"	"	"	"	5.1	8.1	11.2	14.2	17.2	20.3
RGB-2+4	390.5	"	"	"	"	"	"	"	5.8	9.2	12.7	16.1	19.6	23.0
RGB-2+6	449	"	"	"	"	"	"	"	6.3	10.1	13.9	17.8	21.6	25.4
RGB-2+8	507.5	"	"	"	"	"	"	"	7.1	11.3	15.5	19.7	23.9	28.1
RGB-4+4	449	"	"	"	"	"	"	"	6.3	10.1	13.9	17.8	21.6	25.4
RGB-4+6	507.5	"	"	"	"	"	"	"	7.1	11.3	15.5	19.7	23.9	28.1
RGB-4+8	566	"	"	"	"	"	"	"	7.6	12.1	16.6	21.1	25.6	30.1
RGB-6+6	566	"	"	"	"	"	"	"	7.6	12.1	16.6	21.1	25.6	30.1
RGB-6+8	624.5	"	"	"	"	"	"	"	8.4	13.3	18.3	23.3	28.3	33.3
RGB-8+8	683	"	"	"	"	"	"	"	9.1	14.6	20.1	25.5	31.0	36.4

n = number of frames in width. All measurements in millimetres. Weight in kilograms.

Steel

SS EN10025 / S235JRG2
DIN RST 37-2
BS 4360 gr.40
NS 17100

Stainless Steel

DIN 1.4404
ASTM A316L
AISI 316L
BS 970 gr.316 S11
NS 14450

Aluminium

EN AW-6082
DIN ALMG SI I
A 6082
BS H30/6082 TF
NS 17305

