

# MV cables Tools

## MF2/40-S



### Certifications

Approved by ERDF

### Section

MV Multifunction

### Application

Field  
Laboratory



### PRODUCT BENEFITS

Tuning of the pitch of the tool  
Embedded wear pads to protect the tool from the contact with the outer sheath.

### TOOL CAPACITY

**Diameter** 16 - 40 mm  
0,630 - 1,575 inch

**Outer sheath and insulation thickness capacity** 11 mm / 0,433 in

### TOOL DIMENSIONS

**Length** 150 mm

**Width** 80 mm

**Height** 100 mm


**Weight without box** 1,24 Kg

**Packaging** None

## Multifunction tool for outer sheath and insulation

### TO DO WHAT

The MF2/40-S enables the user to :  
Remove the outer sheath (PE-PVC-PR) with a straight and neat cut  
Set the length and remove thicker insulation with a straight and neat cut

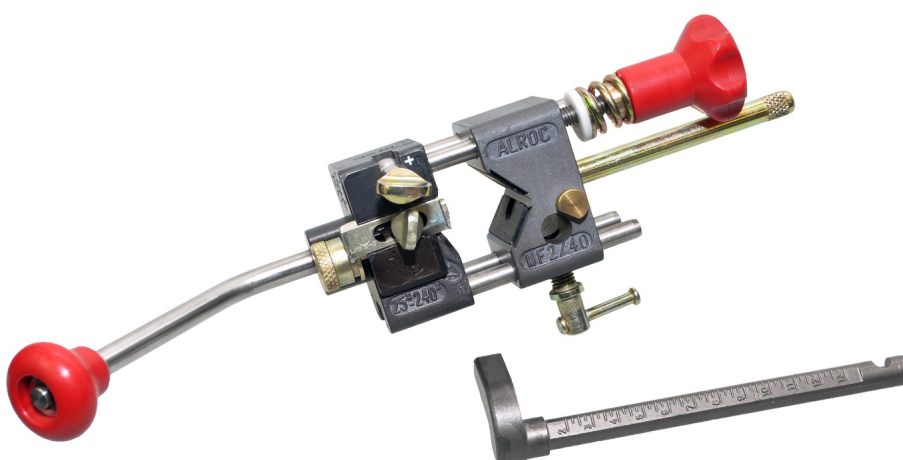

### Spare part

KIT-MF3/40 - Protective wear pads  
LMF2-S - Spare blade for outer sheath and thick insulation  
BR - Thrust to set the length of insulation to be remove  
VBB1 - Screw for locking the thrust  
PCR - Quick set up right angled 45° handle  
196855 - Straight handle M10  
108098 - Clamping knob for blade

### Associated tool

MF1+/25 - Multifunction tool for bonded semiconductor  
SRC - Scoring stylus for peelable semiconductor with chamfer



**THORNE &  
DERRICK  
INTERNATIONAL**

Thorne & Derrick  
+44 (0) 191 490 1547  
www.thorneandderrick.com

MV cables Tools

# MF2/40-S



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Outer sheath and insulation thickness capacity	Length	Width	Height		
MF2/40	16 - 40 mm 0,630 - 1,575 in	7 mm / 0,275 mm	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none	
MF2/40-S	16 - 40 mm 0,630 - 1,575 in	11 mm / 0,433 in	150 mm 5,906 in	80 mm 3,150 in	100 mm 3,937 in	none	
MF2/60	16 - 58 mm 0,630 - 2,283 in	7 mm / 0,275 mm	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none	
MF2/60-S	16 - 58 mm 0,630 - 2,283 in	11 mm / 0,433 in	170 mm 6,693 in	90 mm 3,543 in	120 mm 4,724 in	none	