



MELCROFT



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582


Cable Tie - LUL series Releasable Lock Format Suitable for Hostile / Volatile Locations and Environments

- ◆ Easy to use
- ◆ Releasable Lock
- ◆ UV Resistant
- ◆ High Strength
- ◆ One piece construction
- ◆ Serviceable -30°C to +105 Deg. C
- ◆ Colour: Black
- ◆ Excellent electrical and thermal insulator



Complies with:

- London Underground 'Fire Safety Performance of Materials' specification **No. A-1085** (formerly 2-01001-002).
- BS6853:1999 - **Category 1a**

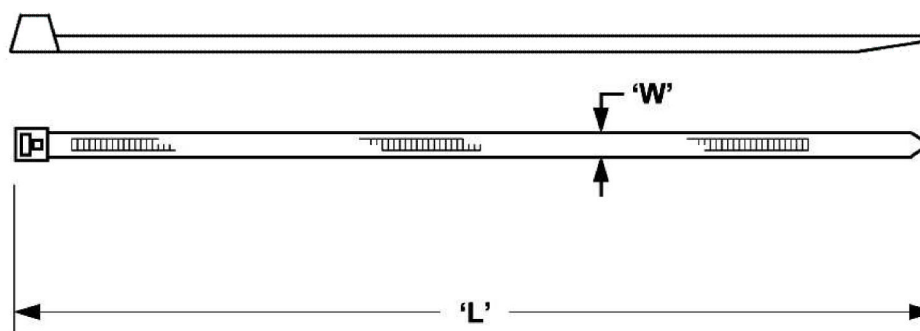

ITEM CODE	'L' OVERALL LENGTH mm	'W' NOMINAL WIDTH mm	MAX. BUNDLE DIAMETER mm	MIN. BUNDLE DIAMETER mm	STANDARD PACKAGING
LUL 120	120.0	2.5	24.0	1.5	500 & 1000
LUL 200	200.0	3.6	52.0	1.5	500 & 1000
LUL 295	295.0	3.6	75.0	1.5	500 & 1000
LUL 370	370.0	7.6	105.0	4.8	500 & 1000

Material:

- Self extinguishing Low Smoke Zero Halogen (LS0H) / LFH Nylon 6 smooth surface thermoplastic resin
- Halogen and Phosphorous free
- Flame retardant - Flammability to UL94 V-0 rating - Heat Stabilised
- Resistant to solvents, alkalis, diluted acids, oils and greases
- UV and Fungal Resistant
- Oxygen Index (LOI): 0.35
- Charpy notched impact strength 10kJ/m² at +23°C
- CTI: 600V

Product:

- Manufactured to tight tolerances