

Section

HV Outer sheath

Application

Field
Laboratory
Production



PRODUCT BENEFITS

Quick, light and easy to use

All cutting depth ranging from 0.5 mm / 0.02 inch to 5 mm / 0.2 inch are available on demand

How to built your customized pliers : PG5HTA/yyzz

yy = Circular cutting depth e.g : 28 = 2.8 mm / .11 inch

zz = Longitudinal cutting depth e.g : 33 = 3.3 mm / .13 inch

TOOL CAPACITY

Diameter	120 - 170 mm 4,724 - 6,693 inch
----------	------------------------------------

Cutting thickness capacity	
----------------------------	--


TOOL DIMENSIONS

Length	515 mm
Width	195 mm
Height	200 mm

Pliers for HV cable outer sheath

TO DO WHAT

The pliers PG7HTB/3535 series enables the user to make a circular and longitudinal cut in order to remove cable's outer sheath

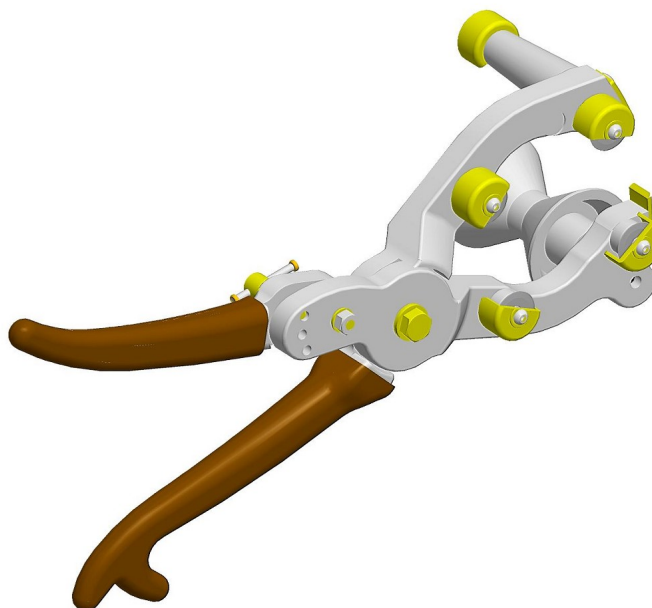

Spare part

MTC5/35 - Spare blade for circular cutting (x4)

MTL5/35 - Spare blade for longitudinal cutting

Associated tool

EGA - HV and EHV cable's outer sheath and shield spreaders

LHS3 - Monofunction tool for semiconductor

LH3 - Monofunction tool for insulation



**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick
+44 (0) 191 490 1547
www.thorneandderrick.com

HV cables Tools

PG7HTB/3535



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Cutting thickness capacity	Length	Width	Height	
PG4HTA/3033	47 - 75 mm 1,850 - 2,953 in	3,0 mm / 0,118 in	300 mm 11,811 in	110 mm 4,331 in	105 mm 4,134 in	none
PG5HTB/3535	69 - 95 mm 2,717 - 3,740 in		360 mm 14,173 in	140 mm 5,512 in	160 mm 6,299 in	none
PG6HTB/3535	90 - 125 mm 3,543 - 4,921 in		515 mm 20,276 in	195 mm 7,677 in	200 mm 7,874 in	none
PG7HTB/3535	120 - 170 mm 4,724 - 6,693 in		515 mm 20,276 in	195 mm 7,677 in	200 mm 7,874 in	none