

**Section**

MV Outer sheath

**Application**Field  
Laboratory  
Production**PRODUCT BENEFITS**

3 different longitudinal cutting depth in one interchangeable cutting head  
Quick set up of the cutting head  
The interchangeable cutting head fit on PR4, PRG3, PRG4

**TOOL CAPACITY**

<b>Diameter</b>	9 - 30 mm 0,354 - 1,181 inch
<b>Circular cutting thickness capacity</b>	0,6 mm / 0,024 in
<b>Longitudinal cutting thickness capacity</b>	0,6-0,9-1,2 mm / 0,024-0,035-0,047 in

**TOOL DIMENSIONS**

<b>Length</b>	260 mm
<b>Width</b>	90 mm
<b>Height</b>	70 mm
<b>Weight without box</b>	0,6 Kg
<b>Packaging</b>	None

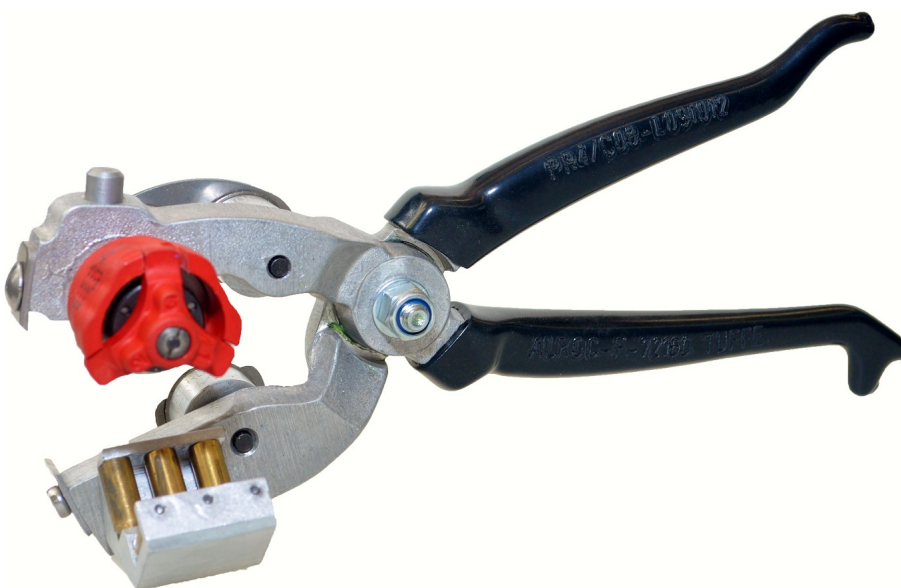
## Pliers for MV cable outer sheath with 3 adjustable longitudinal cutting depths

**TO DO WHAT**

The PR4/C06L060912 enables the user to make a circular and longitudinal cut in order to remove cable's outer sheath

All cutting depth ranging from 0,5 mm / 0,020 in to 5 mm / 0,197 in are available on demand  
Maximum cutting depth for the cutting head with 3 positions : 3,5mm / 0,138 in

How to built your customized pliers : PR4/Cyy-Lzz zz zz  
yy = Circular cutting depth e.g : 06 = 0,6 mm /0,024 in  
zz zz zz = 3 longitudinal cutting depth e.g : 06 09 12 = 0,6 - 0,9 -1,2 mm / 0,024 - 0,035 - 0,047 in

**Options**

SGM - Large size pouch

**Spare part**

MTC4/06 - Spare blade for circular cutting (x3)

TRL/06-09-12 - Spare interchangeable longitudinal cutting head

**Associated tool**

ASC-AKN - Tool for bonded semiconductor

MF1/25-EP - Tool for peelable semiconductor



**THORNE &  
DERRICK  
INTERNATIONAL**

Thorne & Derrick  
+44 (0) 191 490 1547  
www.thorneandderrick.com



Part Number	Diameter	Tool capacity		Dimensions			Packaging
		Circular cutting thickness capacity	Longitudinal cutting thickness capacity	Length	Width	Height	
PR4/1220E	9 - 30 mm 0,354 - 1,181 in	1,2 mm / 0,047 in	1,2-1,7-2,0 mm / 0,047-0,067-0,079 in	260 mm 10,236 in	90 mm 3,543 in	70 mm 2,756 in	none
<b>PR4/C06L060912</b>	9 - 30 mm 0,354 - 1,181 in	0,6 mm / 0,024 in	0,6-0,9-1,2 mm / 0,024-0,035-0,047 in	260 mm 10,236 in	90 mm 3,543 in	70 mm 2,756 in	none
PR4/C09L091113	9 - 30 mm 0,354 - 1,181 in	0,9 mm / 0,035 in	0,9-1,1-1,3 mm / 0,035-0,043-0,051 in	260 mm 10,236 in	90 mm 3,543 in	70 mm 2,756 in	none
PRG3/C20L222830	26 - 52 mm 1,024 - 2,047 in	2,0 mm / 0,079 in	2,2-2,8-3,0 mm / 0,087-0,110-0,118 in	270 mm 10,630 in	100 mm 3,937 in	95 mm 3,740 in	none
PRG3/C21L212528	26 - 52 mm 1,024 - 2,047 in	2,1 mm / 0,083 in	2,1-2,5-2,8 mm / 0,083-0,098-0,110 in	270 mm 10,630 in	100 mm 3,937 in	95 mm 3,740 in	none
PRG3/C22L222833	26 - 52 mm 1,024 - 2,047 in	2,2 mm / 0,087 in	2,2-2,8-3,3 mm / 0,087-0,110-0,130 in	270 mm 10,630 in	100 mm 3,937 in	95 mm 3,740 in	none
PRG4/20-2530	47 - 75 mm 1,850 - 2,953 in	2,0 mm / 0,078 in	2,5-2,8-3,0 mm / 0,098-0,110-0,118 in	300 mm 11,811 in	110 mm 4,331 in	105 mm 4,134 in	none
PRG4/C25-L283335	47 - 75 mm 1,850 - 2,953 in	2,5 mm / 0,098 in	2,8 - 3,3 - 3,5 mm / 0,110-0,130-0,138 in	300 mm 11,811 in	120 mm 4,724 in	105 mm 4,134 in	none