

Stainless Steel Self-Locking Ties



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

A revolution begins...



ELECTRICAL GROUP

new!

Increased lock strength

Easier threading

Lower installed cost

New sizes & styles

With all of the features of the original PAN-STEEL™ stainless steel cable tie:

- Withstands harsh environments
- Unique locking ramp
- Self-locking with low thread force
- Fully rounded edges
- Type 304 and 316 stainless steel
- State-of-the-art tooling

PAN-STEEL™

system

A revolutionary new design in stainless steel ties!

Engineered for the most extreme applications...

- World's highest rated loop tensile strength ball locking tie for an extra margin of safety
- Aggressive head design provides higher retained tension for a more secure bundle
- Exclusive lead in design for quick, easy threading for fastest installation time

Locking head construction

New aggressive locking head*

Allows for quicker locking of the ball for a tighter installation on all bundles.

Innovative displacement lock*

Creates an improved interference between the ball and the tie body for improved locking strength.

Exclusive lead in design*



Creates a wider entrance for the tail of the tie, providing easier threading for lower installed cost.

Extended retaining tab

Allows for a fully supported head design for increased locking strength.

Unique locking ramp

Creates constant contact between the tie and locking ball, which assures locking in any position.

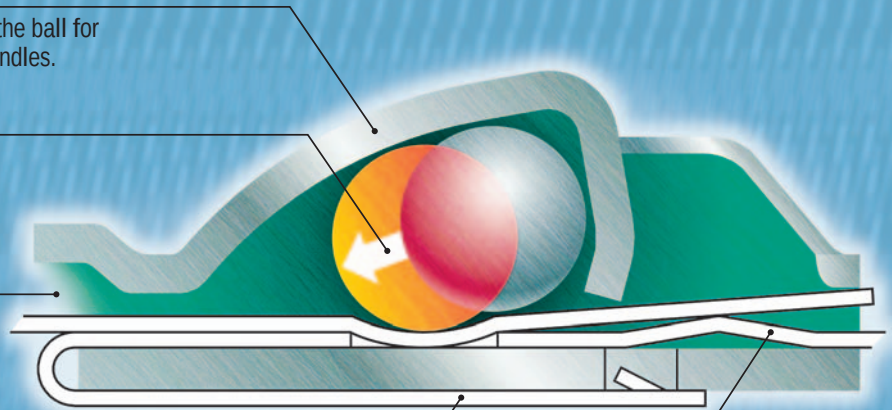

Strengthening ribs*

Integrated into the locking head, resulting in a stronger head design and increased lock strength.

* Patents pending

Product specifications

- Material: Type 304 or 316 stainless steel
- Temperature range: -112°F (-80°C) to 1000°F (538°C) (non-coated ties)
- Water absorption: none
- Flammability: non-flammable
- Ultraviolet resistance: excellent
- Chemical resistance: excellent
- Radiation resistance: 2×10^8 rads
- Loop tensile strength range: 200–450 lbs. (890–2000N) (see chart for sizes)
- Fully rounded edges and smooth surfaces
- Estimated outdoor service life: 40 years

Styles and sizes for virtually any application

General Purpose Ties

Excellent performance in any environment. Available in three cross sections.

WAVE-TY™ Stainless Steel Ties

Patented wave form spring maintains a high tension grip on non-resilient objects. Available in three cross sections.

Patented Nylon 11 Selectively Coated Ties

The strength of steel with the protection and safety of nylon. Heavy cross section only.



Part Number	Max. Bundle Diameter in. (mm)	Length in. (mm)	Material	Min. Loop* Tensile Strength lbs. (N)	Min. Bundle Diameter in. (mm)	Width in. (mm)	Thickness in. (mm)	Installation Tool	Std. Pkg. Qty.	Std. Ctn. Qty.		
STANDARD CROSS SECTION GENERAL PURPOSE TIES												
MLT1S-CP	1 (25)	5.0 (127)	304	200 (890)	0.5 (13)	0.18 (4.6)	0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	100	500		
MLT2S-CP	2 (51)	7.9 (201)										
MLT2.7S-CP	2.7 (69)	10.2 (259)										
MLT4S-CP	4 (102)	14.3 (362)										
MLT6S-CP	6 (152)	20.5 (521)										
MLT8S-CP	8 (203)	26.8 (679)										
NEW! LIGHT HEAVY CROSS SECTION GENERAL PURPOSE TIES												
MLT2LH-LP	2 (51)	7.9 (201)	304	250 (1112)	0.5 (13)	0.25 (6.4)			0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	50	250
MLT4LH-LP	4 (102)	14.3 (362)										
MLT6LH-LP	6 (152)	20.5 (521)										
MLT8LH-LP	8 (203)	26.8 (679)										
HEAVY CROSS SECTION GENERAL PURPOSE TIES												
MLT2H-LP	2 (51)	7.9 (201)	304	450 (2000)	0.5 (13)	0.31 (7.9)	0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT			50	250
MLT4H-LP	4 (102)	14.3 (362)										
MLT6H-LP	6 (152)	20.5 (521)										
MLT8H-LP	8 (203)	26.8 (679)										
AISI 316 Stainless Steel for Superior Corrosion Resistance												
STANDARD CROSS SECTION GENERAL PURPOSE TIES												
MLT1S-CP316	1 (25)	5.0 (127)	316	200 (890)	0.5 (13)	0.18 (4.6)			0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	100	500
MLT2S-CP316	2 (51)	7.9 (201)										
MLT4S-CP316	4 (102)	14.3 (362)										
MLT6S-CP316	6 (152)	20.5 (521)										
MLT8S-CP316	8 (203)	26.8 (679)										
NEW! LIGHT HEAVY CROSS SECTION GENERAL PURPOSE TIES												
MLT2LH-LP316	2 (51)	7.9 (201)	316	250 (1112)	0.5 (13)	0.25 (6.4)	0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT			50	250
MLT4LH-LP316	4 (102)	14.3 (362)										
MLT6LH-LP316	6 (152)	20.5 (521)										
MLT8LH-LP316	8 (203)	26.8 (679)										
HEAVY CROSS SECTION GENERAL PURPOSE TIES												
MLT2H-CP316	2 (51)	7.9 (201)	316	450 (2000)	0.5 (13)	0.31 (7.9)			0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	50	250
MLT4H-CP316	4 (102)	14.3 (362)										
MLT6H-CP316	6 (152)	20.5 (521)										
MLT8H-CP316	8 (203)	26.8 (679)										
WAVE-Ty™ Stainless Steel Ties for Superior Grip on Rigid Bundles												
NEW! STANDARD CROSS SECTION												
MLT2.7WS-LP	2.7 (69)	10.2 (259)	304	200 (890)	2 (51)	0.18 (4.6)	0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT			50	250
MLT4WS-LP	4 (102)	14.3 (362)										
MLT6WS-LP	6 (152)	20.5 (521)										
MLT8WS-LP	8 (203)	26.8 (679)										
NEW! LIGHT HEAVY CROSS SECTION												
MLT2.7WLH-LP	2.7 (69)	10.2 (259)	304	250 (1112)	2 (51)	0.25 (6.4)			0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	50	250
MLT4WLH-LP	4 (102)	14.3 (362)										
MLT6WLH-LP	6 (152)	20.5 (521)										
MLT8WLH-LP	8 (203)	26.8 (679)										
HEAVY CROSS SECTION												
MLT2.7WH-LP	2.7 (69)	10.2 (259)	304	450 (2000)	2 (51)	0.31 (7.9)	0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT			50	250
MLT4WH-LP	4 (102)	14.3 (362)										
MLT6WH-LP	6 (152)	20.5 (521)										
MLT8WH-LP	8 (203)	26.8 (679)										
WAVE-Ty™ Stainless Steel Ties for Superior Grip on Rigid Bundles - AISI 316 Stainless Steel												
NEW! STANDARD CROSS SECTION												
MLT2.7WS-LP316	2.7 (69)	10.2 (259)	316	200 (890)	2 (51)	0.18 (4.6)			0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	50	250
MLT4WS-LP316	4 (102)	14.3 (362)										
MLT6WS-LP316	6 (152)	20.5 (521)										
MLT8WS-LP316	8 (203)	26.8 (679)										
NEW! LIGHT HEAVY CROSS SECTION												
MLT2.7WLH-LP316	2.7 (69)	10.2 (259)	316	250 (1112)	2 (51)	0.25 (6.4)	0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT			50	250
MLT4WLH-LP316	4 (102)	14.3 (362)										
MLT6WLH-LP316	6 (152)	20.5 (521)										
MLT8WLH-LP316	8 (203)	26.8 (679)										
HEAVY CROSS SECTION												
MLT2.7WH-LP316	2.7 (69)	10.2 (259)	316	450 (2000)	2 (51)	0.31 (7.9)			0.010 (0.25)	PPTMT GS4MT ST2MT or HTMT	50	250
MLT4WH-LP316	4 (102)	14.3 (362)										
MLT6WH-LP316	6 (152)	20.5 (521)										
MLT8WH-LP316	8 (203)	26.8 (679)										
Nylon 11 Selectively Coated AISI 316 Stainless Steel Cable Ties												
MLTC2H-LP316	2 (51)	7.9 (201)	316	250 (1112)	0.5 (13)	0.31 (7.9)	0.010** (0.25)	PPTMT GS4MT ST2MT or HTMT			50	250
MLTC4H-LP316	4 (102)	14.3 (362)										
MLTC6H-LP316	6 (152)	20.5 (521)										
MLTC8H-LP316	8 (203)	26.8 (679)										

* Per military specification MIL-B-23190
 ** Base material less coating

For additional sizes and applicable approvals contact technical support at 866-405-6659 or email tminfo@panduit.com.

Order the number of ties required in multiples of package quantities.

Optional Installation Tooling



- Complete line of manual and pneumatic installation tools speed installation
- Side-entry of cable ties into the tools means quick and easy installation
- Automatic tension and cut-off capabilities available on select models
- High reliability, low maintenance, long life

Tool	MLT Cross Section	MLT Usage per Year	Operation
GS4MT	Standard, Light Heavy, Heavy	Under 50,000	Hand; tool controlled tension and cut-off
PPTMT	Standard, Light Heavy, Heavy	Over 50,000	Pneumatic; tool controlled tension and cut-off
ST2MT	Standard, Light Heavy, Heavy	Under 10,000	Hand; manual controlled tension, twist cut-off
HTMT	Standard, Light Heavy, Heavy	Under 10,000	Hand; manual controlled tension, no cut-off



Everywhere you need us!

PANDUIT® CORP.
 Tinley Park, IL 60477-3091
 Customer Service: 800-777-3300
 Technical Support: 866-405-6659
 Email: tminfo@panduit.com
 Internet: www.panduit.com/eg

PANDUIT CANADA
 Markham, Ontario
 Phone: 800-777-3300

PANDUIT EUROPE LTD.
 London, UK
 Phone: 44 208-601-7200

PANDUIT ASIA PACIFIC PTE. LTD.
 Republic of Singapore
 Phone: (65) 6379 6700

PANDUIT JAPAN
 Tokyo, Japan
 Phone (81) (3) 3767-7011

PANDUIT LATIN AMERICA
 Jalisco, Mexico
 Phone: (52) (333) 666-2501

PANDUIT AUSTRALIA PTY. LTD.
 Victoria, Australia
 Phone: (61) 3-9794 9020

Worldwide Subsidiaries and Sales Offices



For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty

PANDUIT Corp. All rights reserved. Printed in Thailand.

SA-SSCB01
 6/2003