

Material Specifications

- Type: AISI 304 or 316 non-magnetic stainless steel.
- Temperature Range: -112°F (-80°C) to +1000°F (538°C)
- Melting Point: 2500 – 2600°F (1371 – 1427°C)
- Water Absorption: None
- Flammability: Excellent
- Ultraviolet Resistance: Excellent
- Radiation Resistance: 2 x 10⁸ Rads
- Hardness: **PAN-STEEL™** ties are made from 1/4 hard stainless steel
- Tensile Strength @ 73°F – 125,000 to 150,000 psi
- Loop Tensile Strength: 200 lbs (890 N).

And the Optional Tooling Used To Install Them




- Complete line of manual and pneumatic installation tools speeds installation
- Side-entry of cable ties into the tools, makes for quick and easy installation
- Automatic tension and cut-off capabilities available on select models
- High reliability, low maintenance



Locking Head Ramp Design

A unique design employing a stainless steel ball permanently entrapped in the head portion of the tie allows for smooth entry of the tie body for ease of threading. No tools required. The tie is self-locking and will not release regardless of head orientation.

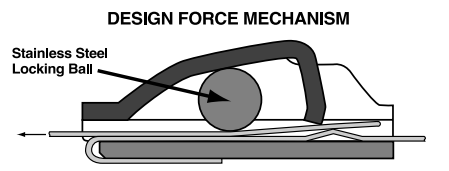

Our products are warranted to be free from defects in material and workmanship at the time of sale but our obligation under this warranty is limited to the replacement of any product proved to be defective within 6 months (for product) or 90 days (for tools) from the date of delivery. Tool warranty is void if Panduit tools are modified, altered or misused in any way. Use of Panduit tooling with any product other than the specified Panduit products for which the tool was designed, constitutes misuse. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability whatsoever in connection therewith.

This warranty is made in lieu of and excludes all other warranties, expressed or implied. THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR USE ARE SPECIFICALLY EXCLUDED. Neither seller nor manufacturer shall be liable for any other

injury, loss or damage, whether direct or consequential, arising out of the use of, or the inability to use, the product.

The information contained in this literature is based on our experience to date and is believed to be reliable. It is intended as a guide for use by persons having technical skill at their own discretion and risk. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. For specific dimensional requirements consult the factory. This publication is not to be taken as a license to operate under, or a recommendation to infringe any existing patents. This supersedes and voids all previous literature, etc.



ELECTRICAL GROUP

Panduit Corp.
17301 Ridgeland Avenue
Tinley Park, IL 60477-3091
Phone: 888-506-5400, Ext. 2241
708-532-1800
FAX: 815-485-5839
Email: info@panduit.com
Website: www.panduit.com

Panduit Canada
Div. of Panduit Corp.
140 Amber Street
Markham, Ontario L3R 3J8
Phone: 800-387-9689
FAX: 905-475-6998

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

For Pricing and Further Information —
Contact your local authorized
PANDUIT Distributor or Sales Office

SA101N459A-NL
Printed in U.S.A.



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582



Superior Grip Stainless Steel Cable Ties

©Panduit Corp. 2000
ALL RIGHTS RESERVED





Stainless Steel Cable Ties


✓ The Patented WAVE FORM Spring in the **WAVE-TY™**

- Tightly clamps on applications where other stainless steel ties will not function
- Retains tension on a solid bundle with minimal applied force
- Tension may be created with a manual tool or PANDUIT® installation tooling
- ✓ **Still incorporates all of the features of the original stainless steel cable tie**
 - Locking head clamp design guarantees performance in critical applications
 - Self locking with low thread force
 - Full rounded sides and smooth surfaces for safe handling
 - State of the art tooling available from manual to pneumatic
 - Available in type 304 and 316 stainless steel

Part Number	Matl. & Cross Section in. (mm)	Min. Loop Tensile Strength lbs. (N)	Min. Bundle Dia. in. (mm)	Max. Bundle Dia. in. (mm)	Length in. (mm)	Recommended Tool	Std. Pkg. Qty.*	Ctn. Qty.
<i>WAVE-TY™ Series</i>								
MLT2.7WH-LP	304 0.31" X .010" (7.8 X 0.25)	200 (890)	2" (51)	2.7" (70)	10.2" (259)	PPTMT GS4MT ST2MT HTMT or SBT	50	250
MLT4WH-LP			2" (51)	4" (102)	14.2" (361)		50	250
MLT6WH-LP			2" (51)	6" (152)	20.5" (521)		50	250
MLT8WH-LP			2" (51)	8" (203)	26.8" (681)		50	250
MLT10WH-LP			2" (51)	10" (254)	33.0" (838)		50	250

*Order number of ties required in multiples of Std. Pkg. Qty

Patented WAVE FORM Explained

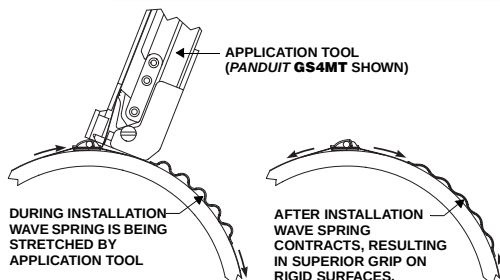

HEAT SHIELD APPLICATION



BUNDLING APPLICATION



SIGN HANGING APPLICATION

WAVE-TY™