


Line End Clamp CE52/A

Fig. 3 Code CE52/A


Conductor range 13 to 42mm diameter.

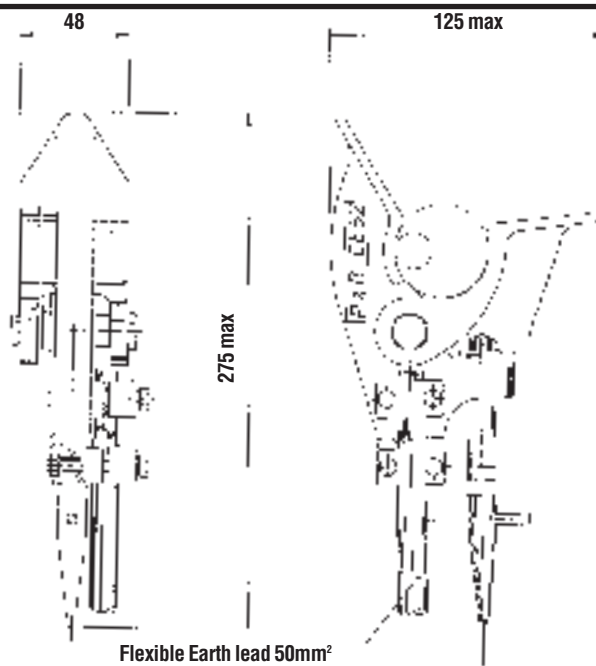

Flexible Earth lead 50mm²
 Aluflex fitted on site (O.D.12.4)
 or PB50F Ferrule (Fig. 7)

Running Earth CE23/A

Fig. 5 Code CE23/A

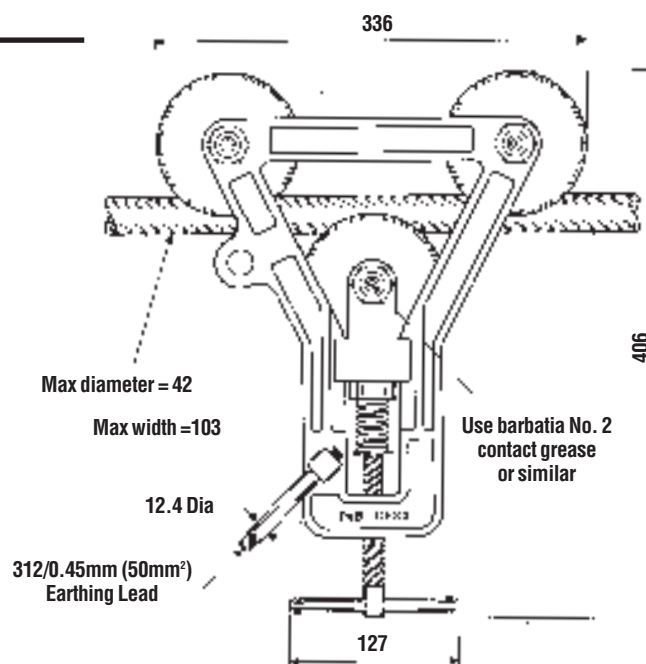

Lug PB50

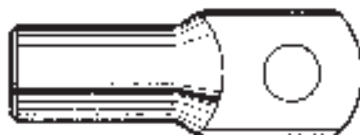



Fig. 6 Code PB50

Compression Termination to suit 50mm² Aluflex
 Compress to 15.5mm A/F x 30mm Bite Length.

Ferrule PB50F

Fig. 7 Code PB50F

Ferrule Termination
 To suit 50mm² Aluflex
 Compress to 15.5mm A/F. Bite Length 35/37mm

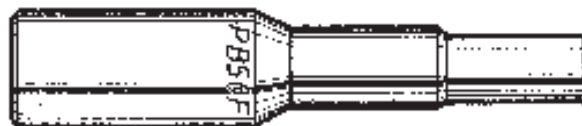

All sizes are in Millimetres