


Two Bolt Cleat (Aluminium)

370 series

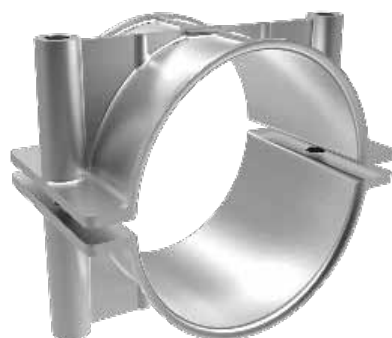

The Aluminium Two Bolt Cleat is an LUL approved cable cleat which can be applied to all types of cable routes.

Features and Benefits

- Suitable for use with cable diameters 51 to 159mm.
- Manufactured from aluminium alloy.
- Two-piece, two fixing design.
- Can be double stacked on common fixings.
- Operating temperature -60°C to +105°C.
- Suitable for LV & HV cables.
- Can be used for all types of cable routes.
- Plain finish - for normal industrial areas or outdoor unpolluted areas.
- Epoxy coated versions available for harsh environments.
- Optional rubber liners available.
- Tested in accordance with BS EN 50368.
- LUL APR Product ID 1963

Performance Data

EN 50368:2003	
Type	6.1.1 Metallic
Impact Resistance	6.2.5 V. Heavy
Lateral Load	18.1 kN
Axial Load	11.4 -> 13.8kN
Needle Flame	>120 secs

Technical Data

Cable and Cleat Selection					Cleat Details				
Design Number		Cable Diameter			Dimensions (mm)			Stud Size	Weight (g)
Standard	Epoxy Coated	A (mm)		B (mm)	C	D	E		
		Min	Max	Max					
370BA10	370BB10	51	57	70	98	49	76	M10	230
370BA11	370BB11	57	64	76	98	49	76	M10	240
370BA12	370BB12	64	70	82	135	64	114	M10	384
370BA13	370BB13	70	76	88	135	64	114	M10	384
370BA14	370BB14	76	83	96	140	64	114	M12	420
370BA15	370BB15	83	89	101	140	64	114	M12	490
370BA16	370BB16	89	95	108	152	76	126	M12	442
370BA17	370BB17	95	101	114	152	76	126	M12	442
370BA18	370BB18	101	108	120	165	76	140	M12	650
370BA19	370BB19	108	114	126	165	76	140	M12	650
370BA30	370BB30	115	121	133	175	100	150	M12	734
370BA31	370BB31	121	127	139	175	120	150	M12	720
370BA32	370BB32	127	133	145	200	120	175	M12	970
370BA33	370BB33	133	140	152	200	120	175	M12	956
370BA34	370BB34	140	146	158	200	120	175	M12	935
370BA35	370BB35	146	152	164	210	120	185	M12	893
370BA36	370BB36	152	159	172	215	150	190	M12	1325


All cleats have a single central fixing hole for a 12mm diameter fixing bolt.

Design Numbers with the Suffix "L" are fitted with a 5mm rubber lining

Cable and Cleat Selection				Cleat Details					
Design Number		Cable Diameter		Dimensions (mm)				Stud Size	Weight (g)
Standard	Epoxy Coated	A (mm)		B (max)	C	D	E		
		Min	Max						
370BA30L	370BB30L	105	111	133	175	100	150	M12	984
370BA31L	370BB31L	111	117	139	175	120	150	M12	1020
370BA32L	370BB32L	117	123	145	200	120	175	M12	1280
370BA33L	370BB33L	123	130	152	200	120	175	M12	1302
370BA34L	370BB34L	130	136	158	200	120	175	M12	1240
370BA35L	370BB35L	136	142	164	210	120	185	M12	1274
370BA36L	370BB36L	142	149	172	215	150	190	M12	1845

* Technical information subject to change without notice

* 370BA/BB & BA*L cleats are supplied without fixing bolts which should be selected by using dimension 'B' together with the thickness of the cable support arrangement

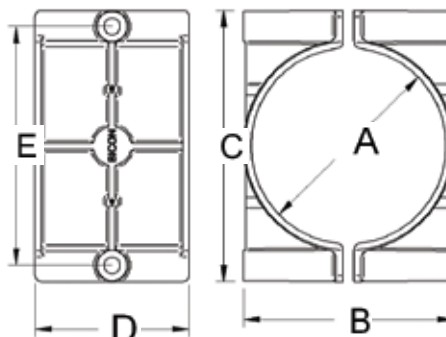

CE

T&D

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582

PRYSMIAN
 Draka