

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

JUJCC

Low Voltage Industrial Cable Joint Kits

(Includes Compression Connectors)



BICAST JEM

Application

Straight joints for LV cables with copper conductors from 1.5mm² to 400mm²

Features


- Low Hazard Isocynate free JEM resin
 - Twin Pack mixing in clear laminate sachets
 - Extremely low viscosity combined with enhanced adhesion
- Transparent injection moulded polypropylene shells up to size 4 and vacuum formed clear HIPS for the larger sizes.
- Slim-line design for use with compression connectors



JUJCC Low Voltage Industrial Cable Joints

Technical Data

- > Low Voltage Straight Joints for 600/1000 Volt polymeric insulated copper conductors, SWA cables to BS5467, BS6346 and IEC 502.
- > Tested and approved to BS EN 50393 & ENA ER C81
- > Includes 4 compression connectors and constant force spring Armour Bonds.
- > JEM Resin
 - Easier mixing in "Twin Pack" totally enclosed mixing in a clear laminate sachet.
 - Extremely low mix viscosity allows void free joint filling.
 - JEM Resin is insensitive to moisture and will cure under water.
 - Enhanced adhesion to XLPE, MDPE, PVC & lead.
 - High flash point, non-flammable liquid - No special storage or transport requirements.
 - Not classified as irritating to the skin or eyes.
 - Does not cause skin sensitization.

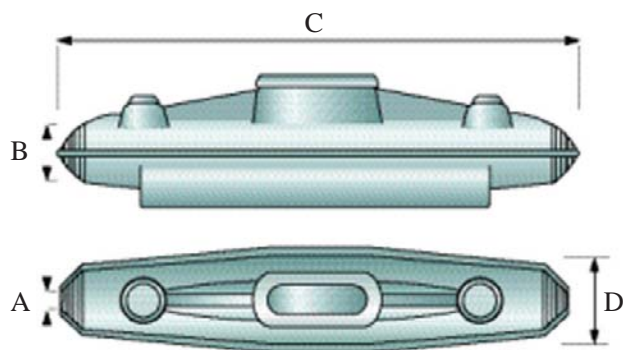

Shell Dimensions

Joint Ref.	Min. box entry Ø 'A'	Max. box entry Ø 'B'	Box length 'C'	Internal Ø 'D'
JUJ2CC	12mm	26mm	185mm	35mm
JUJ6CC / JUJ10CC	14mm	32mm	245mm	48mm
JUJ16CC	23mm	39mm	325mm	52mm
JUJ25CC / JUJ35CC	28mm	50mm	375mm	68mm
JUJ50CC / JUJ70CC / JUJ95CC	32mm	58mm	520mm	102mm
JUJ120CC / JUJ150CC / JUJ185CC	45mm	75mm	705mm	124mm
JUJ240CC / JUJ300CC	40mm	89mm	862mm	140mm
JUJ400CC	57mm	95mm	900mm	150mm

Joint selection for 2, 3 and 4 core cables

Nominal Area of Conductor	Two Core Ref.	Three Core Ref.	Four Core Ref.
1.5mm ²	JUJ2CC	JUJ2CC	JUJ2CC
2.5mm ²	JUJ2CC	JUJ2CC	JUJ2CC
4mm ²	JUJ2CC	JUJ2CC	JUJ2CC
6mm ²	JUJ6CC	JUJ6CC	JUJ6CC
10mm ²	JUJ10CC	JUJ10CC	JUJ10CC
16mm ²	JUJ16CC	JUJ16CC	JUJ16CC
25mm ²	JUJ25CC	JUJ25CC	JUJ25CC
35mm ²	JUJ35CC	JUJ35CC	JUJ35CC

Nominal Area of Conductor	Two Core Ref.	Three Core Ref.	Four Core Ref.
50mm ²	JUJ50CC	JUJ50CC	JUJ50CC
70mm ²	JUJ70CC	JUJ70CC	JUJ170CC
95mm ²	JUJ95CC	JUJ95CC	JUJ95CC
120mm ²	JUJ120CC	JUJ120CC	JUJ120CC
150mm ²	JUJ150CC	JUJ150CC	JUJ150CC
185mm ²	JUJ185CC	JUJ185CC	JUJ185CC
240mm ²	JUJ240CC	JUJ240CC	JUJ240CC
300mm ²	JUJ300CC	JUJ300CC	JUJ300CC
400mm ² *	JUJ400CC	JUJ400CC	JUJ400CC

*Joint does not accommodate crossed core (phase to phase) jointing.