

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

ZHMB

Low Voltage Afumex LSOH Cable Joint Kits (Excludes Connectors)



BICAST JEM

Application

Branch joints for LSOH/LSF LV cables with copper conductors from 10mm² to 50mm²

Features


- Low Hazard Isocynate free JEM resin
 - Twin Pack mixing in clear laminate sachets
 - Extremely low viscosity combined with enhanced adhesion
- Rigid glass reinforced phenolic joint shells which are both fire retardant and LSOH
- Designed for use with compression and mechanical connectors

ZHMB Low Voltage Afumex LSOH Cable Joints

Technical Data

- > Low Voltage Branch Joints for 600/1000 Volt polymeric insulated copper conductors, SWA cables to BS6724 and IEC 60502-1 (halogen free).
- > Tested and approved to BS EN 50393 & ENA ER C81
- > Tests on complete joints to BS 6724 (using IEC 1034 methods) give smoke emission values A_0 significantly less than the permitted maximum of 1.5.
- > Includes constant force spring Armour Bonds.
- > JEM Resin
 - Easier mixing in "Twin Pack" totally enclosed mixing in a clear laminate sachet.
 - Extremely low mix viscosity allows void free joint filling.
 - JEM Resin is insensitive to moisture and will cure under water.
 - Enhanced adhesion to XLPE, MDPE, PVC & lead.
 - High flash point, non-flammable liquid - No special storage or transport requirements.
 - Not classified as irritating to the skin or eyes.
 - Does not cause skin sensitization.

Property	Joint Component Characteristics		
	Test Method	Shell GF Phenolic	Resin Filled Acrylic
Oxygen Index	BS2782 Pt.1Mth.141	>70	>26
Temperature Index.	BS2782 Pt.1Mth.143	>350°C	-
Heat Distortion Temp.	BS2782 Pt.1Mth.121A	>150°C	-
Toxic Gas Emission	-	Nil	Nil
Smoke Emission	BS6724	$A_0 < 1.5$	-

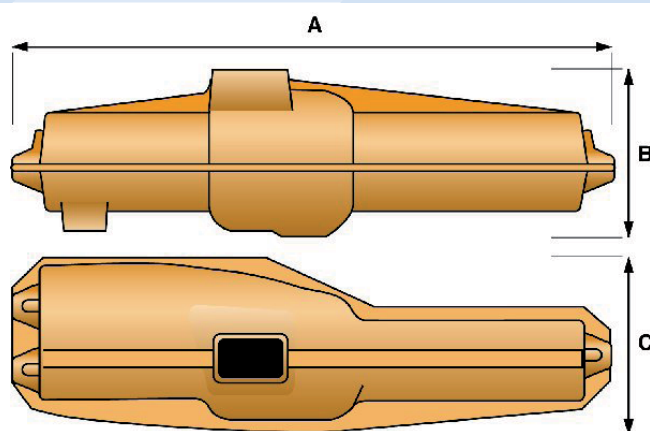

Straight Joint Ref.	Shell Dimensions		
	A	B	C
ZHMB1	420mm	150mm	150mm
ZHMB2	520mm	195mm	180mm

Joint selection for 2, 3 and 4 core cables



Nominal Area of Conductor	600/1000V Afumex Branch Joints		
	Two Core Ref.	Three Core Ref.	Four Core Ref.
10mm ²	ZHMB1	ZHMB1	ZHMB1
16mm ²	ZHMB1	ZHMB1	ZHMB2
25mm ²	ZHMB1	ZHMB1	ZHMB2
35mm ²	ZHMB1	ZHMB2	ZHMB2
50mm ²	ZHMB2	ZHMB2	ZHMB2
70mm ²	ZHMB2	ZHMB2	-
95mm ²	ZHMB2	ZHMB2	-
120mm ²	ZHMB2	-	-



Note: ZHMB joints are provided without connectors, compression & mechanical connectors can be provided separately.