

Cleats & Cable Fixings

Aluminium Hook Cleat




Description

- > Suitable for use with cables from 25 to 76mm in diameter
- > Available in 8 sizes
- > Without cap, supports cables in position during installation
- > Self adjusting ranges
- > Two-piece, single fixing design
- > Can be double stacked on one fixing
- > Suitable for indoor dry normal industrial use or outdoor unpolluted areas
- > Operating temperature -60°C to +85°C
- > Not designed to secure cables in long vertical routes



Aluminium Hook Cleat

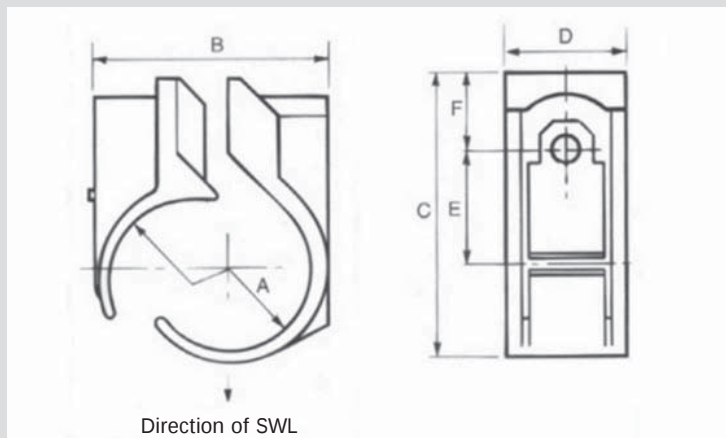

Cable and Cleat Details

Cable & Cleat Selection			Cleat Details							
Design Number	Cable Diameter		Dimensions (mm)						Weight Aluminium	SWL (FOS 3) Aluminium
	A (mm)		B		C	D	E	F	G	kg
	Min	Max	Min	Max						
371AA05	25	32	37	45	74	45	29	24	106	55
371AA06	32	38	44	50	81	45	32	24	113	55
371AA07	38	44	50	57	88	45	35	24	142	55
371AA08	44	51	55	63	94	45	38	24	142	55
371AA09	51	57	64	72	103	45	43	24	191	55
371AA10	57	64	72	79	111	45	48	24	213	55
371AA11	64	70	80	91	124	45	53	25	291	65
371AA12	70	76	91	96	132	45	57	27	326	65

METHOD OF FIXING

In all applications the cleat should be mounted on suitable M10 fixings.

When mounting directly on "Unistrut" or "Leprack" type channel, adaptor plate 380AG02 should be used.

SWL = Safe Working Load

FOS 3 = Values include a Factor Of Safety of 3.