

BW Brass Gland



DESCRIPTION





BW GLAND FOR SWA CABLE 410BW - SERIES

- To BS6121 Part1
- Suitable for single wire armoured, plastic or rubber sheathed cables
- Application-for use in dry, indoor situations
- Low cost two part design
- Shroud may be used for additional ingress protection

CABLE AND GLAND DETAILS

CABLE DIMENSIONS ACCOMODATED					GLAND REFERENCE		GLAND DIMENSIONS					ACCESSORIES		
DIAMETER				ARMOUR WIRE DIAMETER C mm	SIZE	DESIGN NUMBER	ISO ENTRY THREAD		APPROX. LENGTH FROM SHOULDER F	HEXAGON SIZE		BRASS BACKNUT DESIGN NUMBER	SHROUDS DESIGN NUMBER	
UNDER ARMOUR A		OVERALL B					DIAMETER D	LENGTH E		ACROSS FLATS G	ACROSS CORNERS H		PVC 401PV-	PCP 401AA-
MIN mm	MAX mm	MIN mm	MAX mm											
-	8.6	-	13.2	0.9	16	BW16	16	10	21	20.8	23.6	429AA-51	01	02
-	11.6	-	15.8	0.9/1.25	20S	BW20S	20S	10	24	22.0	24.9	429AA-53	02	02
-	13.9	-	20.8	0.9/1.25	20	BW20	20	10	25	27.0	30.5	429AA-53	03	03
-	19.9	-	27.2	1.25/1.6	25	BW25	25	10	26	37.6	42.2	429AA-55	05	05
-	26.2	-	33.5	1.6/2.0	32	BW32	32	10	28	47.3	53.6	429AA-56	06	06
-	32.1	-	39.9	1.6/2.0	40	BW40	40	15	25	50.0	57.0	429AA-57	07	07
-	44.0	-	52.6	2.0/2.5	50	BW50	50	15	36	70.1	77.2	429AA-59	09	09
-	55.9	-	65.3	2.5	63	BW63	63	15	30	80.0	87.4	429AA-61	11	11
-	61.9	-	71.6	2.5	75S	BW75S	75S	15	40	85.0	95.0	429AA-63	13	13
-	67.9	-	78.0	2.5	75	BW75	75	15	40	98.8	109.2	429AA-63	13	13

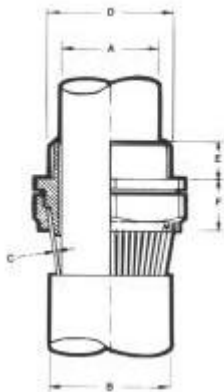

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582