


## Cleats & Cable Fixings

## Afumex Two Bolt Cleat





### Description

- > Suitable for use with cables from 50 to 94mm in diameter
- > Available in 7 sizes
- > Low Smoke and Zero Halogen
- > Suitable for use with Afumex, LSOH and LSF cables
- > LUL Approved
- > Sunlight (UV) and weather resistant
- > Two-piece, two fixing design
- > Operating temperature -20°C to +90°C
- > Can be double stacked on common fixings

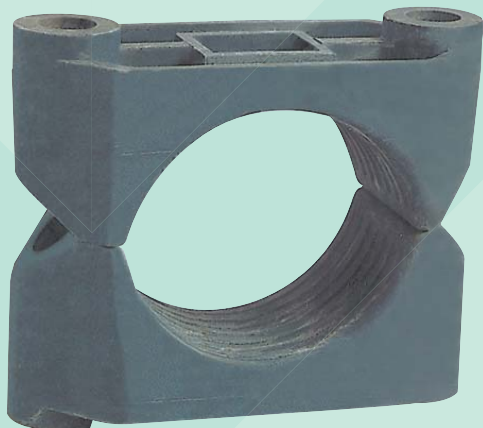

**WWW.CABLEJOINTS.CO.UK**  
**THORNE & DERRICK UK**  
**TEL 0044 191 490 1547 FAX 0044 477 5371**  
**TEL 0044 117 977 4647 FAX 0044 977 5582**  
**WWW.THORNEANDDERRICK.CO.UK**

# Afumex Two Bolt Cleat

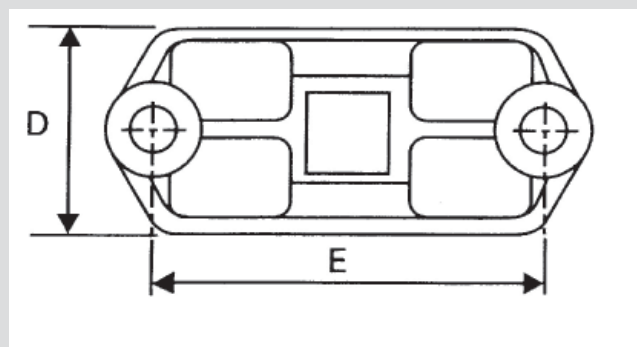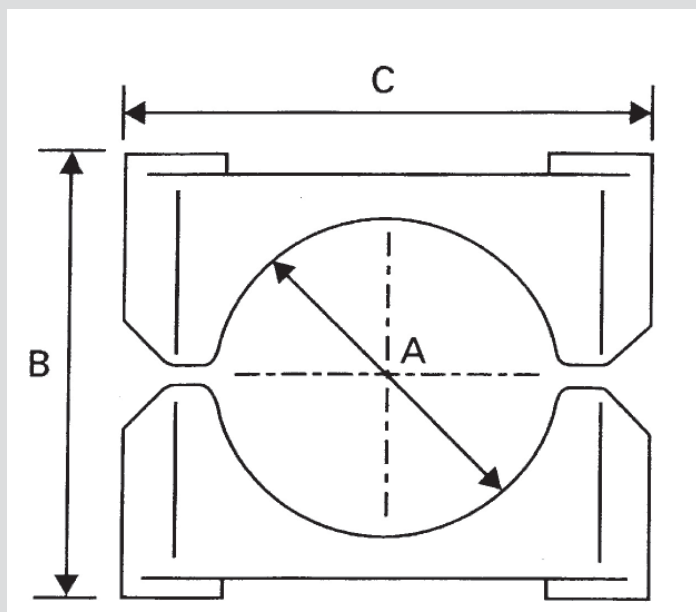

## Cable and Cleat Details

| Cable & Cleat Selection |                          |     | Cleat Details   |     |    |     |                       | Approx.<br>weight per<br>cleat<br>(2 halves)<br>(g) |
|-------------------------|--------------------------|-----|-----------------|-----|----|-----|-----------------------|-----------------------------------------------------|
| Design Number           | Cable Diameter<br>A (mm) |     | Dimensions (mm) |     |    |     | SWL FOS2<br><br>(kgf) |                                                     |
|                         | Min                      | Max | B<br>Max        | C   | D  | E   |                       |                                                     |
| 374LSF01                | 50                       | 58  | 89              | 102 | 45 | 80  | 290                   | 174                                                 |
| 374LSF02                | 56                       | 64  | 93              | 102 | 45 | 80  | 340                   | 158                                                 |
| 374LSF03                | 62                       | 70  | 98              | 114 | 45 | 92  | 360                   | 174                                                 |
| 374LSF04                | 68                       | 76  | 104             | 114 | 50 | 92  | 400                   | 210                                                 |
| 374LSF05                | 74                       | 82  | 110             | 126 | 50 | 104 | 375                   | 254                                                 |
| 374LSF06                | 80                       | 88  | 118             | 126 | 50 | 104 | 445                   | 264                                                 |
| 374LSF07                | 86                       | 94  | 121             | 136 | 60 | 114 | 475                   | 326                                                 |

### METHOD OF FIXING

In all applications the cleat should be mounted on suitable M10 fixings.

There is no need for any channel adaptor when mounting directly on to 'C' section channel.

SWL = Safe Working Load

FOS 2 = Values include a Factor Of Safety of 2.



[WWW.CABLEJOINTS.CO.UK](http://WWW.CABLEJOINTS.CO.UK)  
**THORNE & DERRICK UK**  
 TEL 0044 191 490 1547 FAX 0044 477 5371  
 TEL 0044 117 977 4647 FAX 0044 977 5582  
[WWW.THORNEANDDERRICK.CO.UK](http://WWW.THORNEANDDERRICK.CO.UK)