




Cable Hanger Data Sheet.

Fabricated from mild steel flat bar (S275JR+AR grade Hot Rolled Structural Steel to BS EN 10025-2:2004). Hot dip spin galvanising to BS EN ISO1461:1999 after manufacture. Special designs are available upon request e.g. Girder Hanging, 90° Twist, side by side cables.

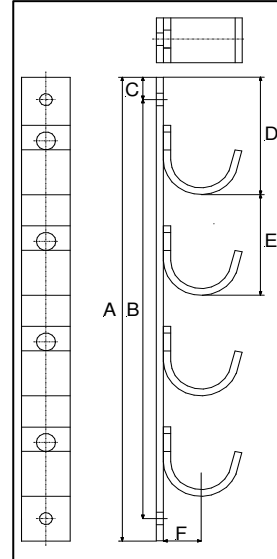

Size 1 for cables up to 50mm diameter.

Part Number	Ways	Dimensions mm						Material Size mm		Fixing holes dia.	Pack Qty	Weight g	*SWL kgs
		A	B	C	D	E	F	Width	Thickness				
CH1W1	1	145	105	20	105	-	37	40	6	11	1	500	200
CH2W1	2	235	195	20	105	90	37	40	6	11	1	900	200
CH3W1	3	325	285	20	105	90	37	40	6	11	1	1300	200
CH4W1	4	415	375	20	105	90	37	40	6	11	1	1700	200
CH5W1	5	505	465	20	105	90	37	40	6	11	1	2100	200
CH6W1	6	595	555	20	105	90	37	40	6	11	1	2500	200

Size 2 for cables 51mm-75mm diameter.

CH1W2	1	170	130	20	130	-	50	50	6	13	1	820	250
CH2W2	2	295	255	20	130	125	50	50	6	13	1	1480	250
CH3W2	3	420	380	20	130	125	50	50	6	13	1	2240	250
CH4W2	4	545	505	20	130	125	50	50	6	13	1	2980	250
CH5W2	5	670	630	20	130	125	50	50	6	13	1	3710	250
CH6W2	6	795	755	20	130	125	50	50	6	13	1	4440	250

Size 3 for cables 76mm-100mm diameter.

CH1W3	1	185	145	20	145	-	62	50	6	13	1	980	250
CH2W3	2	345	305	20	145	160	62	50	6	13	1	1900	250
CH3W3	3	505	465	20	145	160	62	50	6	13	1	2820	250
CH4W3	4	665	625	20	145	160	62	50	6	15	1	3600	250
CH5W3	5	825	785	20	145	160	62	50	6	15	1	4660	250
CH6W3	6	985	945	20	145	160	62	50	6	15	1	5600	250

* Load Capacity: The recommended safe working load for individual hooks is detailed above. Brackets with multiple hook configurations are designed to operate with all hooks carrying their maximum load.



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk

Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582