


## Releasable lashing ties with incorporated fastener

*Special ties*


- Rugged one-piece construction, for heavy-duty applications
- Releasable and re-usable, ideal for temporary installations
- Fast and durable
- Easy handling
- No tooling necessary
- Specially developed accessories, like the wall plug TC5359 and the mounting bases TC5355 to TC5357 (see page 95 for details)

### Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	UV-resistant black
Flammability rating	UL 94 V-2
Other properties	UV-resistant, Halogen free, Silicone free



Introduce the cable tie tail into the lower slot in the head. Tighten the tie and pull it back. Slide in the tie under the catch from the side until it snaps into position.

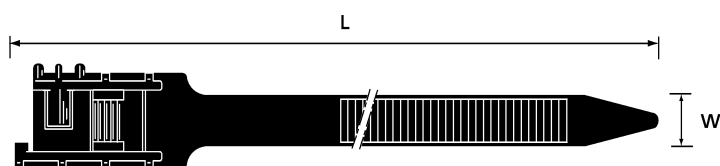

Product Ref.	Length L [mm]	Width W [mm]	Thickness [mm]	Bundle diameter from ... to [mm]	Minimum tensile strength [N]	Quantity [pieces]
TY409	483	12.7	2.0	45 - 121	890	100
TY5409	483	12.7	2.0	45 - 121	890	25

Description of Product Reference structure: see page 10

Description of materials and properties: see pages 134 to 145