




Heatshrink - Standard Grade

Thermal Cable Labels

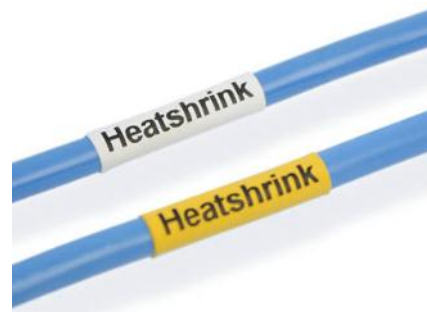

Supplied on rolls you can select the length of marker required with our Silver Fox Labacus Innovator **Advanced** or **Professional** software. Print in conjunction with our Plug'N'Play thermal printer with the same ribbon as all our other thermal labels.



*Get the most from your heatshrink by printing only the length of label you require. You can even produce idents for both ends of a wire at the same time using the unique cross ferrule functionality from our **Professional** software and our Plug'N'Play thermal printer.*

Benefits

- Easy to use and apply
- Shrink down with a standard heat gun
- Print 2 rolls at a time
- Choice of 6 sizes in 2 colours

Technical Data

RoHS compliant

Material	Flame retardant polyolefin
Shrink ratio	3:1
Operating temperature	-55°C to 135°C (-67°F to 275°F)
Printer Type	Silver Fox DTP-1 thermal printer



[View product demo](#)




[View software demo](#)

Thermal Printer



Silver Fox DTP-1

Example LHS6-2(22)T



Drawing not to scale

Order Information

Product Code	Cable ID Ø expanded (mm)	Cable ID Ø recovered (mm)	Roll Length (m)	Pack Qty	Total Pack Length (m)	Colour Options
LHS3-1(22)T*	3	1	22	6 Rolls	132	☐ ☒
LHS4.8-1.6(22)T*	4.8	1.6	22	5 Rolls	110	☐ ☒
LHS6-2(22)T*	6	2	22	4 Rolls	88	☐ ☒
LHS12-4(18)T*	12	4	18	3 Rolls	54	☐ ☒
LHS24-8(13)T*	24	8	13	1 Roll	13	☐ ☒
LHS39-13(10)T*	39	13	10	1 Roll	10	☐ ☒

*Specify colour when ordering