

Flashing Beacon and Continuous Beacon Series 6161



- > Robust, seawater resistant aluminium enclosure
- > Flashing frequency 1 Hz
- > Flashing energy 5 Joules
- > Integrated Ex e connection chamber
- > Light dome available in: signal yellow, red, orange, green, blue and clear
- > Steady beacon in LED technology
- > Extreme temperature range -40 ... +50 °C



E5

01817E00

The flashing beacons and steady beacons of Series 6161 are installed to provide optical signals in explosive gas atmospheres and areas with combustible dust.

	ATEX / IECEx					
Zone	0	1	2	20	21	22
For use in		x	x		x	x

Flashing Beacon and Continuous Beacon

Series 6161

Selection Table

Version	Rated operational voltage	Order number	Weight kg
 6161/2 Flashing Beacon 09344E00	230 V AC, 50 ... 60 Hz	6161/2-11- .21-0	1.500
	110 ... 127 V AC, 50 ... 60 Hz	6161/2-31- .21-0	1.500
	24 ... 42 V AC, 50 ... 60 Hz and 12 ... 48 V DC	6161/2-61- .21-0	1.500
	60 ... 80 V DC	6161/2-41- .21-0	1.500
 6161/3 Continuous Beacon 09344E00	230 V AC, 50 ... 60 Hz	6161/3-10- .21-0	1.400
	24 V AC / DC, 0 Hz, 50 ... 60 Hz	6161/3-70- .21-0	1.400

Order Number Supplement

Colour of glass	signal yellow	6161/ .-.-1..	
	clear	6161/ .-.-2..	
	red	6161/ .-.-3..	
	blue	6161/ .-.-4..	
	green	6161/ .-.-5..	
	orange	6161/ .-.-6..	

Note The optical beacons are supplied without attachment materials and wire guard.
 These must be ordered separately!

Explosion Protection

Global (IECEx)

Gas and dust

IECEx LCI 08.0032X
 Ex d e IIC T* Gb -40°C T_{amb} +**°C
 Ex tb IIIC T* Db IP66 -40°C T_{amb} +**°C
 IEC 60079-0 : 2011
 IEC 60079-1 : 2007-04
 IEC 60079-7 : 2006-07
 IEC 60079-31 : 2008
 ** see ambient conditions for the temperature class

Europe (ATEX)

Gas and dust

LCIE 02 ATEX 6062 X
 Ex II 2 G Ex d e IIC T* Gb -40°C T_{amb} +**°C
 Ex II 2 D Ex tb IIIC T* Db IP66 -40°C T_{amb} +**°C
 EN 60079-0 : 2012
 EN 60079-1 : 2007
 EN 60079-7 : 2007
 EN 60079-31 : 2009
Conditions of certificate:
 If wire guard is not installed, the apparatus shall be submitted to low mechanical impact only.
 ** see ambient conditions for the temperature class

Certifications and certificates

Version	6161/2 Flashing Beacon	6161/3 Continuous Beacon
Certificates	IECEx, ATEX, China (China-Ex), India (PESO), Kazakhstan (GOST K), Russia (GOST R), Serbia (SRPS), Ukraine (TR), Belarus (operating authorisation)	IECEx, ATEX, China (China-Ex), Kazakhstan (GOST K), Serbia (SRPS), Ukraine (TR), Belarus (operating authorisation)
Ship approval	GL, RS	--
Conformity	CE 0158 according to 94/9/CE	CE 0158 according to 94/9/CE

Flashing Beacon and Continuous Beacon

Series 6161

Technical Data

Electrical data

Version	6161/2 Flashing Beacon	6161/3 Continuous Beacon
Rated values	24 ... 42 V AC 50 ... 60 Hz 0.5 ... 0.3 A 110 ... 127 V AC 50 ... 60 Hz 0.11 A 230 V AC 50 ... 60 Hz 0.08 A 12 ... 48 V DC 0.5 ... 0.3 A 60 ... 80 V DC 0.13 ... 0.11 A	24 V AC / DC 0 Hz, 50 ... 60 Hz 0.12 A 230 V AC 50 ... 60 Hz 0.02 A
Back-up fuse	4 AT (Fuse slow-blow or automatic circuit breaker C characteristic)	

Luminous characteristics

Version	6161/2 Flashing Beacon	6161/3 Continuous Beacon
Flashing energy	5 Joules	--
Flashing frequency	1 Hz	--
Duty cycle	100%	100%
Service life	6 x 10 ⁶ flashes	--

Ambient conditions

Ambient temperature	** Temperature Class	** Temperature Class
	Type T _{amb} Gas Dust	Type T _{amb} Gas Dust
	6121/2 +40 °C T6 T85 °C	6121/3 +40 °C T6 T65 °C
	+50 °C T5 T100 °C	+50 °C T6 T75 °C

Mechanical data

Degree of protection	IP66 according to IEC/EN 60529
Protection class	I (internal and external PE connection terminal according to IEC/EN 60598)
Material	
Enclosure	aluminium alloy copper-free, yellow/black powder-coated
Light dome	polycarbonate, prismatic
Wire guard	stainless steel
Fixing elements	stainless steel
Sealing ring	NBR-O-ring seal
Special lock	Ex d enclosure; M4 hexagon socket stud

Mounting / Installation

Cable entries	1 x M20 x 1.5 stopping plug 1 x M20 x 1.5 cable gland metal cable gland on request
Clamping range	6 ... 13 mm
Connection type	screw terminal block, 3-pole
Marking	L1 + N + PE
Connection cross-section	
solid	2 x 4 mm ²
finely stranded	2 x 2.5 mm ²
Protective conductor connection	
Inside	max. 6 mm ²
Outside	max. 2.5 mm ² flexible / 4 mm ² rigid



Accessories and Spare Parts

Designation	Figure	Description	Art. no.	Weight kg
Mounting plate	 04279E00	material: stainless steel, includes mounting screws, for wall or floor mounting	120821	0.170
Pipe clamp	 09349E00	material: stainless steel includes mounting screws		
		R 1 1/4 "	120812	0.500
		R 1 1/2 "	120819	0.470
		R 2 "	120823	0.500


Flashing Beacon and Continuous Beacon Series 6161



Accessories and Spare Parts


Designation	Figure	Description	Art. no.	Weight kg
Ceiling or wall-mounting bracket	 09350E00	material: stainless steel includes mounting screws	120826	0.480
Wire guard	 09351E00	material: stainless steel	120818	0.260
Cable gland	 02055E00	8161/5-M20-13 1 piece	138518	0.012
		8161/5-M20-13 50 pieces	138454	0.600
Stopping plug	 04840E00	8290/3-M20 1 piece	143522	0.005
		8290/3-M20 100 pieces	143543	0.500

Dimensional Drawings (All Dimensions in mm) - Subject to Alterations

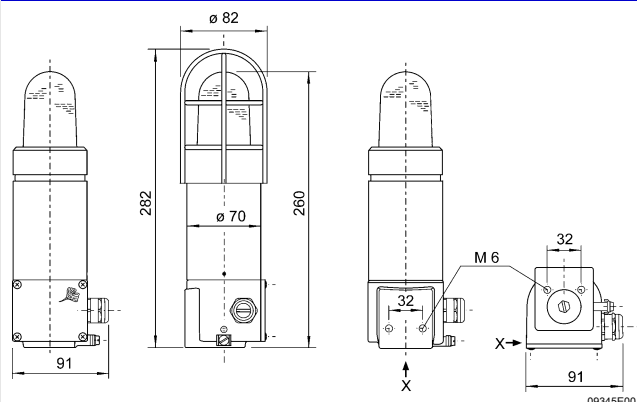

Optical beacon 6161

Mounting accessories

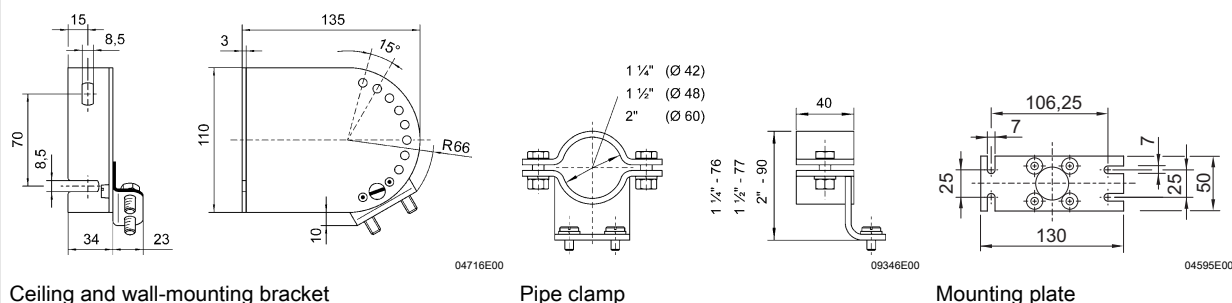

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582