

Bulkhead Light Fitting Series 6388



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582



- > Suitable for incandescent lamps up to 100 W and halogen lamps up to 150 W
- > Through-wiring possible

E2



12797E00

The innovative layout of lamp-holder and terminals enables Series 6388 light fittings to be mounted without heat-resistant cables and without additional junction box.

	ATEX/GOST					
Zone	0	1	2	20	21	22
For use in		x	x			

WebCode 6388A



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582

Bulkhead Light Fitting Series 6388



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582

Selection Table

Version	Lamps	Lampholder	Order number	Weight kg
Bulkhead light fitting Series 6388	up to 150 W	E27	6388/1-2-2	4.000
Note The light fittings are supplied without lamps, see accessories.				

Explosion Protection

Version	6388 (Zones 1, 2)
Explosion protection Europe (ATEX) Gas	IBExU 03 ATEX 1118 II 2 G EEx ed IIC T*

Certificates and approvals

Certificates

ATEX, Russia (GOST-R), Belarus (GOST-B), Serbia (IZP), Kazakhtan (GOST-K)
* Temperature class

Lamps	Lamp wattage	Temperature classes for different orientations		
		Ceiling mounting	Wall mounting	
			horizontal	vertical
Incandescent lamps 230 V	100 W	T2 ¹⁾	T1	T2
	100 W ²⁾	T2 ¹⁾	T2	T2
	100 W coloured glass	T1 ¹⁾	T1	T1
	60 W	T2	T2	T2
	60 W (Ta ≤ 60 °C)	T2 ³⁾	T2 ³⁾	T2 ¹⁾
	40 W	T2	T2	T2
	25 W	T3	T3	T3
Incandescent lamp 24 V	100 W	T1 ¹⁾	T1 ¹⁾	T1 ¹⁾
	60 W	T2	T2	T2
Halogen lamps 230 V	150 W	T1 ³⁾	T1 ³⁾	T1
	100 W	T2	T2	T2

¹⁾ Connection with heat-resistant cable ≥ 85 °C required

²⁾ Lamp with internal reflector

³⁾ Connection with heat-resistant cable ≥ 95 °C required

Technical Data

Electrical data

Rated voltage 230 V AC and 24 V AC / DC

Luminous Characteristics

Lamps

Incandescent lamps, E27 lampholder, for 25, 40, 60, 100 W
Halogen lamps, E27 lampholder, for 100, 150 W


Note

Only incandescent lamps of the companies OSRAM and RADIUM to DIN 49810 part 5 may be used! Shockproof incandescent lamps are exempt from the EU directive on energy saving.

Luminous flux

Incandescent lamps				Halogen lamps	
25 W	40 W	60 W	100 W	100 W	150 W
200 lm	325 lm	575 lm	1160 lm	1800 lm	2870 lm

Luminous intensity distribution

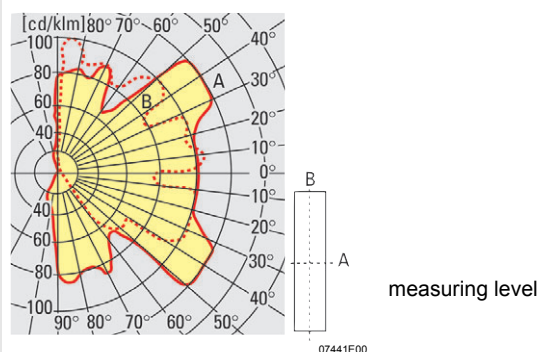

Bulkhead Light Fitting Series 6388



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582



Technical Data

Ambient conditions

Ambient temperature	- 20 ... + 40 °C
	- 20 ... + 60 °C @ 230V/60W

Mechanical data


Type of protection	IP64
Protection class	I (with internal and external PE / PA connection)
Material	
Enclosure material	Light cast alloy, grey
Wire guard	Steel wire, galvanized
Glass	Pressed glass, resistant to temperature changes
Cover options	M6, Hexagonal screw; without switch

Assembly / Installation


Cable entry	1 x M25 x 1.5 cable gland 1 x M25 x 1.5 stopping plug
Connection type	Terminals L1 + N for 2 x 4 mm ² , flexible/solid PE for 2 x 4 mm ² , flexible/solid
Note	Only incandescent lamps of the companies OSRAM and RADIUM to DIN 49810 part 5 may be used! Shockproof incandescent lamps are exempt from the EU directive on energy saving.

E2

Accessories and Spare Parts

Designation	Illustration	Description	Order number	Weight kg
Incandescent lamp	 04958E00	25 W E27 230 V 200 lm	111711	0.040
		40 W E27 230 V 325 lm	111712	0.035
		60 W E27 230 V 575 lm	111713	0.035
		100 W E27 230 V 1160 lm	108853	0.033
		60 W E27 24 V ▽	108860	0.042
		100 W E27 24 V 1160 lm	109340	0.020
Halogen lamps	 05355E00	100 W E27 230 V 1800 lm	207459	0.150
		150 W E27 230 V 2870 lm	207458	0.080
Mounting brackets	 05267E00	1 set	121705	0.115

Dimensional Drawings (All Dimensions in mm) - Subject to Alterations

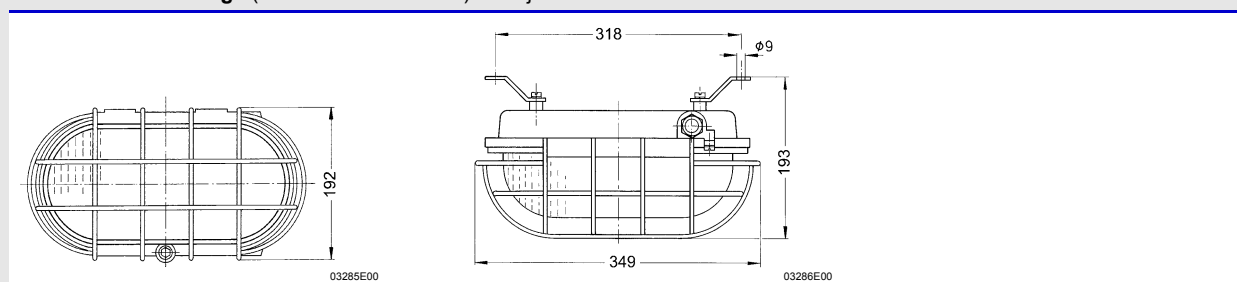

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.



WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582