



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS




FURSE EARTHING

[www.cablejoints.co.uk](http://www.cablejoints.co.uk)

**Thorne and Derrick UK**

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582

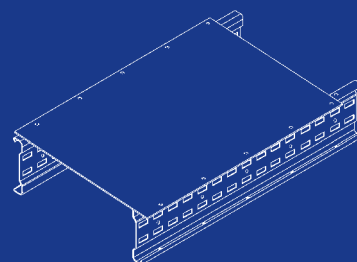

# Stainless Steel

# 09

**01**

Standard  
& Lighting  
Trunking

**02**

Floor  
Trunking

**03**

Skirting  
Trunking

**04**

Dado  
& Bench  
Trunking

**05**

Special  
Trunking

**06**

Cable Tray  
Systems

**07**

Cable  
Supports

**08**

Speedway  
Ladders

**09**

Stainless  
Steel


**10**

OBO Mesh  
Cable Tray  
Systems



Cert No. FM11705 BS EN ISO 9001-2000

09

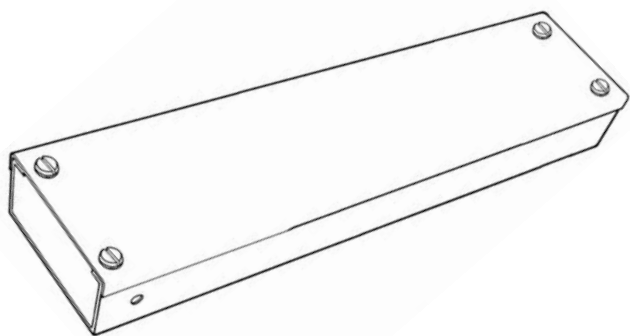


Standard Trunking

- Ref. SSTK22 - 50 x 50mm
- Ref. SSTK33 - 75 x 75mm
- Ref. SSTK42 - 100 x 50mm
- Ref. SSTK44 - 100 x 100mm
- Ref. SSTK66 - 150 x 150mm

Unitrunk standard trunking is manufactured from 304 grade pvc coated steel and is supplied in 3m lengths


Other sizes/grades available on request

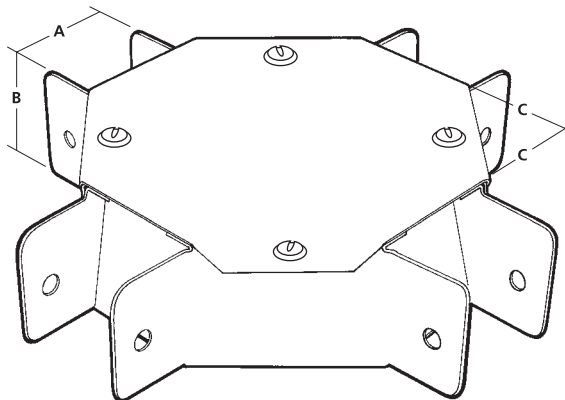

Intersection Box

Fourway Box Ref. SSITB


| Intersection / SSITB |     |     |    |
|----------------------|-----|-----|----|
| Size                 | A   | B   | C  |
| 50                   | 50  | 50  | 30 |
| 75                   | 75  | 75  | 30 |
| 100                  | 100 | 100 | 30 |
| 150                  | 150 | 150 | 50 |

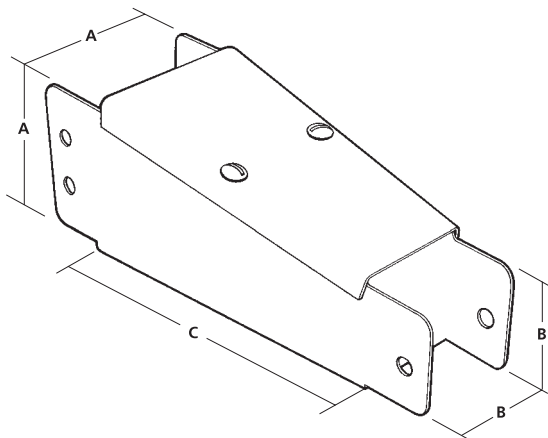

Reducer

Reducer Ref. SSRE

| Reducer / SSRE |     |     |     |
|----------------|-----|-----|-----|
| Size           | A   | B   | C   |
| 75             | 75  | 50  | 150 |
| 100            | 100 | 75  | 150 |
| 100            | 100 | 50  | 150 |
| 150            | 150 | 100 | 150 |

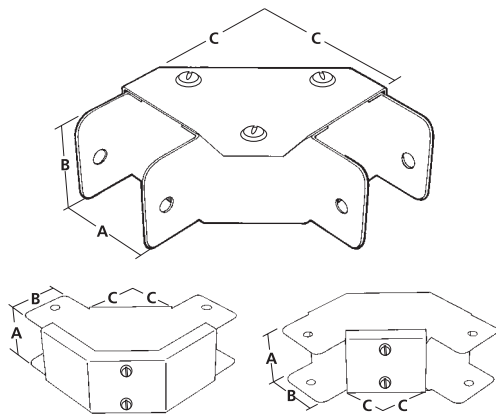


## Gusset Bend

Top Lid Ref. SSGTB

Inside Lid Ref. SSGIB

Outside Lid Ref. SSGOB


| Size | SSGTB |     |     | SSGIB/SSGOB |     |    |
|------|-------|-----|-----|-------------|-----|----|
|      | A     | B   | C   | A           | B   | C  |
| 50   | 50    | 50  | 86  | 50          | 50  | 30 |
| 75   | 75    | 75  | 115 | 75          | 75  | 30 |
| 100  | 100   | 100 | 137 | 100         | 100 | 30 |
| 150  | 150   | 150 | 190 | 150         | 150 | 45 |

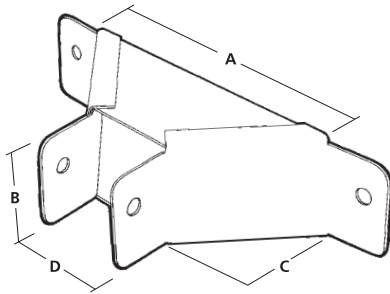

## Flared Flange

Flared Flange Ref. SSFF


| Intersection / SSITB |     |     |    |     |
|----------------------|-----|-----|----|-----|
| Size                 | A   | B   | C  | D   |
| 50                   | 145 | 50  | 50 | 50  |
| 75                   | 175 | 75  | 50 | 75  |
| 100                  | 200 | 100 | 50 | 100 |
| 150                  | 250 | 150 | 50 | 150 |

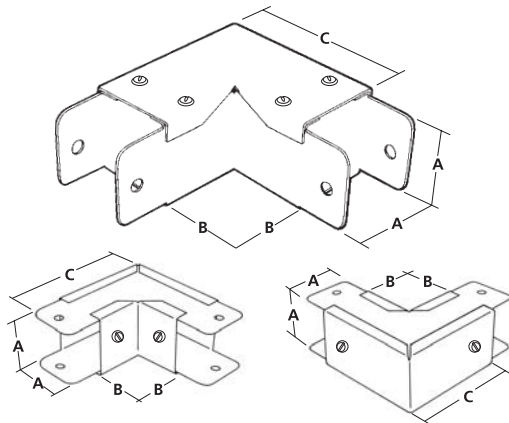

## Sharp Elbow

Top Lid Ref. SSSTE/ SSSIE/ SSSOE


| Size | TOP LID / SSSTE |    |     | INSIDE LID / SSSIE |    |     | OUTSIDE LID / SSSOE |    |     |
|------|-----------------|----|-----|--------------------|----|-----|---------------------|----|-----|
|      | A               | B  | C   | A                  | B  | C   | A                   | B  | C   |
| 50   | 50              | 50 | 100 | 50                 | 40 | 100 | 50                  | 50 | 100 |
| 75   | 75              | 50 | 125 | 75                 | 40 | 125 | 75                  | 50 | 130 |
| 100  | 100             | 50 | 155 | 100                | 40 | 150 | 100                 | 50 | 155 |
| 150  | 150             | 50 | 250 | 150                | 40 | 200 | 150                 | 50 | 205 |

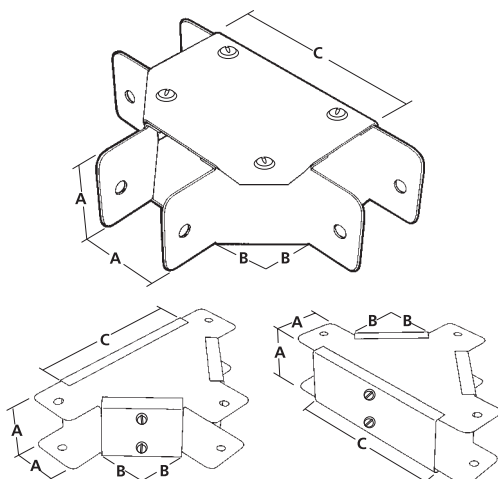

## Gusset Tee

Top Lid Ref. SSGTT/ SSGIT/ SSGOT


| Size | TOP LID / SSGTT |    |     | INSIDE LID / SSGIT |    |     | OUTSIDE LID / SSGOT |    |     |
|------|-----------------|----|-----|--------------------|----|-----|---------------------|----|-----|
|      | A               | B  | C   | A                  | B  | C   | A                   | B  | C   |
| 50   | 50              | 30 | 120 | 50                 | 50 | 150 | 50                  | 50 | 150 |
| 75   | 75              | 30 | 145 | 75                 | 50 | 175 | 75                  | 50 | 175 |
| 100  | 100             | 30 | 170 | 100                | 50 | 200 | 100                 | 50 | 200 |
| 150  | 150             | 30 | 220 | 150                | 50 | 250 | 150                 | 50 | 250 |

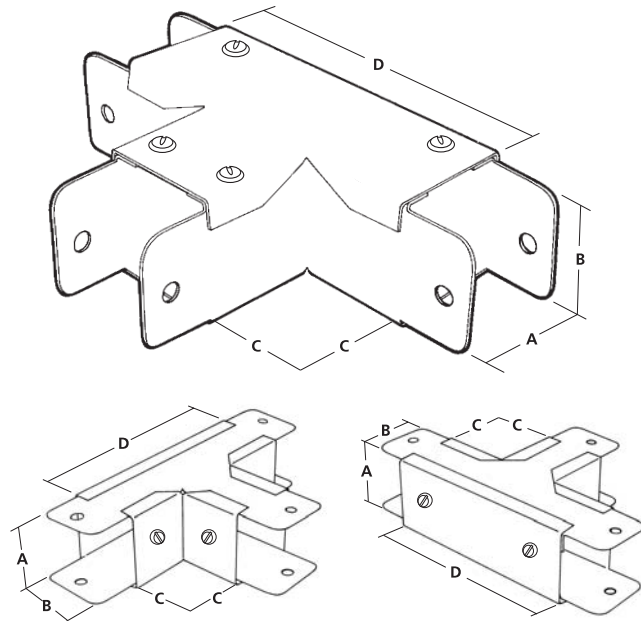

### Sharp Tee

Top Lid Ref. SSSTT  
Inside Lid Ref. SSSIT  
Outside Lid Ref. SSSOT

| Sharp Tee |     |     |    |     |
|-----------|-----|-----|----|-----|
| Size      | A   | B   | C  | D   |
| 50        | 50  | 50  | 50 | 150 |
| 75        | 75  | 75  | 50 | 175 |
| 100       | 100 | 100 | 50 | 200 |
| 150       | 150 | 150 | 50 | 250 |

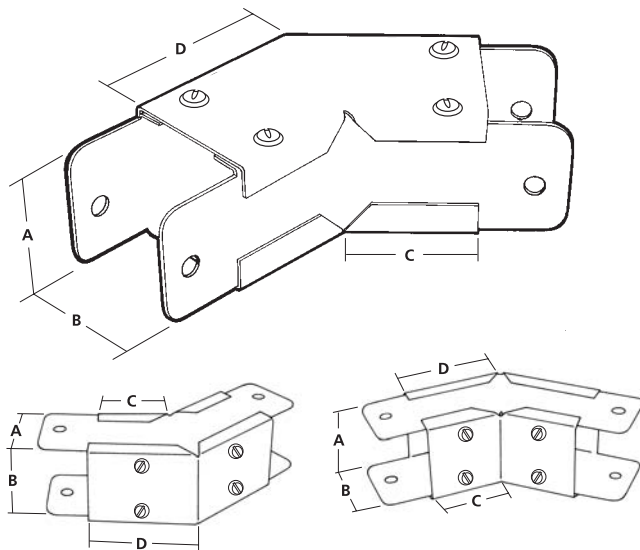

### 45° Elbow

Top Lid Ref. SSTE  
Inside Lid Ref. SSIE  
Outside Lid Ref. SSOE


| 45° Elbow |     |     |    |     |
|-----------|-----|-----|----|-----|
| Size      | A   | B   | C  | D   |
| 50        | 50  | 50  | 50 | 70  |
| 75        | 75  | 75  | 50 | 80  |
| 100       | 100 | 100 | 50 | 90  |
| 150       | 150 | 150 | 50 | 110 |

### Hanger Bracket

50x50mm Ref. SSHBL22  
75x75mm Ref. SSHBL33  
*Available with either 10 or 20mm hole*  
Other sizes available on request


| Hanger / SSHBL |     |    |                               |
|----------------|-----|----|-------------------------------|
| Size           | A   | B  | C                             |
| 50             | 85  | 55 | <sup>10</sup> / <sub>20</sub> |
| 75             | 135 | 85 | <sup>10</sup> / <sub>20</sub> |

50mm - upper fastening  
75mm - lower fastening

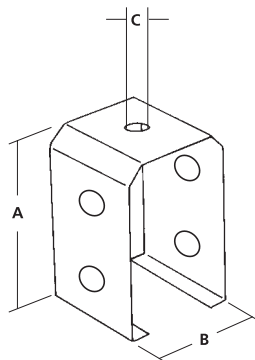

### Blank End

Ref. SSBE




## Socket Outlet

Single Ref. SSSTL1

Double Ref. SSSTL2


For 100mm wide & upwards

| Ref. SSSTL 1/2 |     |     |
|----------------|-----|-----|
| Size           | A   | B   |
| 100            | 230 | 110 |
| 150            | 230 | 160 |

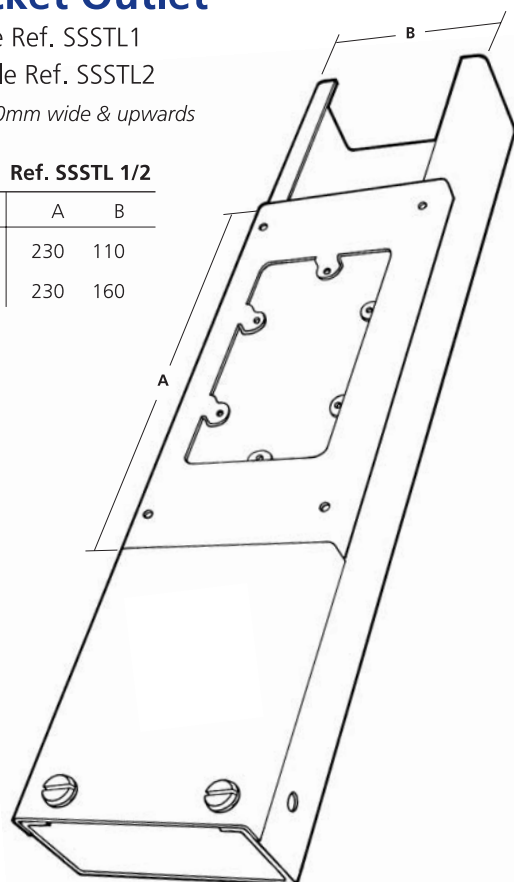

## Cable Support

Ref. SSCS

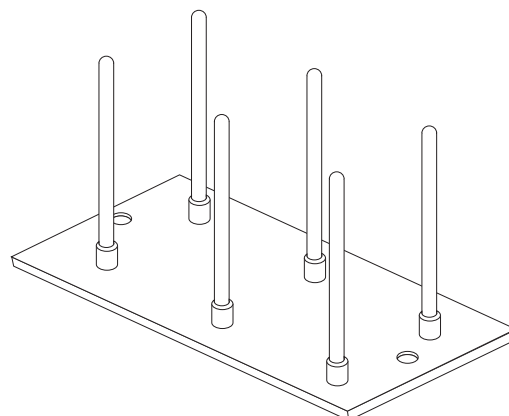


## Dividing Fillets

Ref. SSDF2 - 2"

Ref. SSDF3 - 3"


Ref. SSDF4 - 4"

Ref. SSDF6 - 6"




## Trunking Coupling

Ref. SSTC



## Flanged Coupling


Ref. SSFC (Pair)



## Cable Restraining Strap


Ref. SSCR

For use in inverted position



Light Duty Cable Tray

Ref. SSLD/T 50-900



**FLANGE HEIGHT**

13,5mm  
on 50-225mm width

21,5mm  
on 300-900mm width

**PATTERN DETAIL**




| Part no. | Gauge mm | Tray Width mm | Weight kg |
|----------|----------|---------------|-----------|
| SSLD50T  | 1.0      | 50            | 1.46      |
| SSLD75T  | 1.0      | 75            | 1.88      |
| SSLD100T | 1.0      | 100           | 2.44      |
| SSLD150T | 1.0      | 150           | 3.40      |
| SSLD225T | 1.2      | 225           | 6.24      |
| SSLD300T | 1.2      | 300           | 8.82      |
| SSLD450T | 1.5      | 450           | 11.50     |
| SSLD600T | 1.5      | 600           | 15.40     |
| SSLD750T | 1.5      | 750           | 19.30     |
| SSLD900T | 1.5      | 900           | 22.40     |

Straight Coupler


Ref. SSLDSC

Length 161mm



Cranked Coupler


Ref. SSLDCC (pair)



Fish Plate

Ref. SSLDFP 225-900mm

Tray width less 58mm/ Gauge 1.5mm




Reducer

Ref. SSLD/ /SR


Total length 250mm

\* / / Please state sizes required

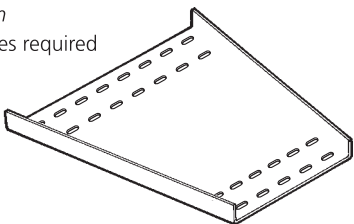

Flat 90° Bend

Ref. SSLDFB 50-900

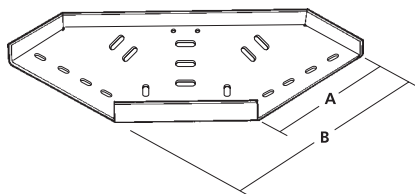


Earth Link

Tin coated copper

Bolts & Nuts

M6X12 Order separately


| A | 50  | 75  | 100 | 150 | 225 | 300 | 450 | 600 | 750 | 900 |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| B | 102 | 127 | 152 | 202 | 278 | 353 | 503 | 653 | 803 | 953 |



## Flat 45° Bend

Ref. SSLD 50-900 HB


|          |    |    |     |     |     |     |     |     |     |     |
|----------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|
| <b>A</b> | 50 | 75 | 100 | 150 | 225 | 300 | 450 | 600 | 750 | 900 |
| <b>B</b> | 72 | 72 | 72  | 72  | 72  | 72  | 150 | 150 | 150 | 150 |
| <b>C</b> | 60 | 70 | 80  | 101 | 132 | 164 | 268 | 330 | 392 | 455 |



## Flat 4 Way Equal Intersection

Ref. SSLD 50-900 FW


|          |           |           |            |            |            |            |            |            |            |            |
|----------|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>50</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 153       | 178       | 203        | 253        | 328        | 403        | 553        | 703        | 853        | 1003       |

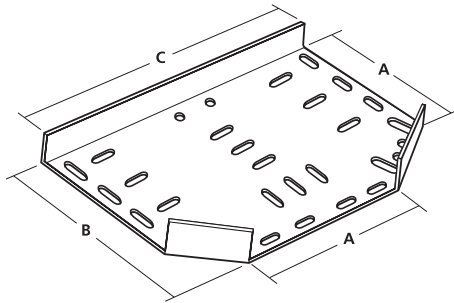

## Flat Equal Tee


Ref. SSLD 50-900 ET

|   |     |     |     |     |     |     |     |     |     |      |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| A | 50  | 75  | 100 | 150 | 225 | 300 | 450 | 600 | 750 | 900  |
| B | 102 | 127 | 152 | 202 | 278 | 353 | 503 | 653 | 803 | 953  |
| C | 153 | 178 | 203 | 253 | 328 | 403 | 553 | 703 | 853 | 1003 |



## Internal 90° Riser Bend

Ref. SSLD 50-900 IR

[illegible]



## External 90° Riser Bend

Ref. SSLD 50-900 ER

[illegible]

Medium Duty Cable Tray

Ref. SSMR/T 75-900



PATTERN DETAIL




| Part no. | Gauge mm | Tray Width mm | Weight kg |
|----------|----------|---------------|-----------|
| SSMR75T  | 1.0      | 75            | 2.26      |
| SSMR100T | 1.0      | 100           | 2.78      |
| SSMR150T | 1.0      | 150           | 4.22      |
| SSMR225T | 1.0      | 225           | 6.20      |
| SSMR300T | 1.0      | 300           | 9.50      |
| SSMR450T | 1.5      | 450           | 16.70     |
| SSMR600T | 1.5      | 600           | 21.33     |
| SSMR750T | 1.5      | 750           | 26.20     |
| SSMR900T | 1.5      | 900           | 31.60     |

Straight Coupler


Ref. SSMRSC

Length 225mm



Cranked Coupler


Ref. SSMRCC (pair)



Fish Plate

Ref. SSMRFP 225-900mm

Tray width less 58mm/Gauge 1.5mm




Reducer

Ref. SSMR/ /SR



Total length 250mm

\*/ / Please state sizes required



Covers & Brackets

VENTILATED AND NON-VENTILATED  
(4 brackets supplied per cover)




| Size mm | A mm | Gauge mm | Weight kg |
|---------|------|----------|-----------|
| 75      | 91   | 1.2      | 3.42      |
| 100     | 116  | 1.2      | 4.13      |
| 150     | 166  | 1.2      | 5.54      |
| 225     | 241  | 1.2      | 7.66      |
| 300     | 316  | 1.2      | 9.78      |
| 450     | 466  | 1.2      | 14.05     |
| 600     | 616  | 1.2      | 18.28     |
| 750     | 766  | 1.2      | 22.49     |
| 900     | 916  | 1.2      | 26.76     |

Conduit Take-off Plate

Ref. SSTR/TOP 20mm

Ref. SSTR/TOP 25mm

Suitable for Light/Medium/Heavy




Earth Link

Tin coated copper

Bolts & Nuts


M6X12 Order separately

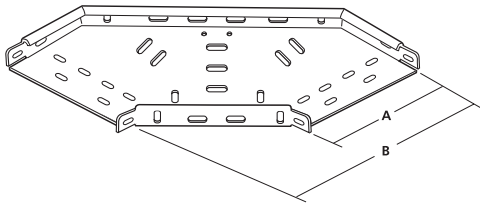

## Flat 90° Bend

Ref. SSMR 75-900 FB


|          |     |     |     |     |     |     |     |     |      |
|----------|-----|-----|-----|-----|-----|-----|-----|-----|------|
| <b>A</b> | 75  | 100 | 150 | 225 | 300 | 450 | 600 | 750 | 900  |
| <b>B</b> | 204 | 227 | 276 | 351 | 452 | 602 | 802 | 969 | 1150 |

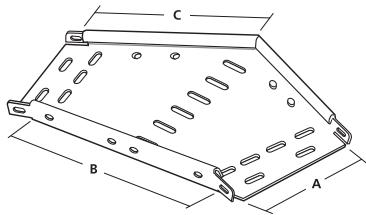

## Flat 45° Bend

Ref. SSMR 75-900 HB


|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 258       | 258        | 258        | 258        | 258        | 258        | 258        | 258        | 258        |
| <b>C</b> | 172       | 182        | 202        | 234        | 265        | 327        | 389        | 451        | 511        |

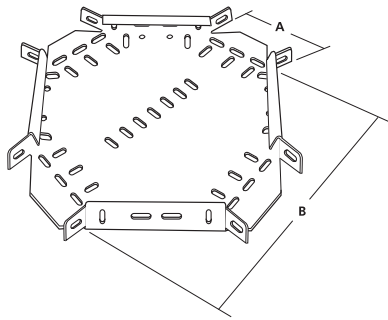

## Flat 4 Way Equal Intersection

Ref. SSMR 75-900 FW


|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 350       | 354        | 404        | 479        | 554        | 734        | 990        | 1004       | 1154       |

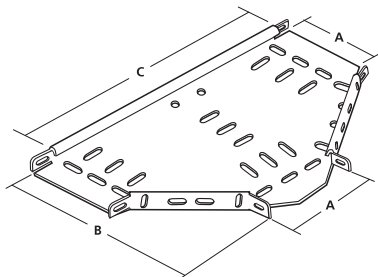

## Flat Equal Tee

Ref. SSMR 75-900 ET

|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 214       | 227        | 284        | 353        | 438        | 593        | 869        | 950        | 1027       |
| <b>C</b> | 350       | 351        | 415        | 479        | 575        | 735        | 990        | 1140       | 1154       |

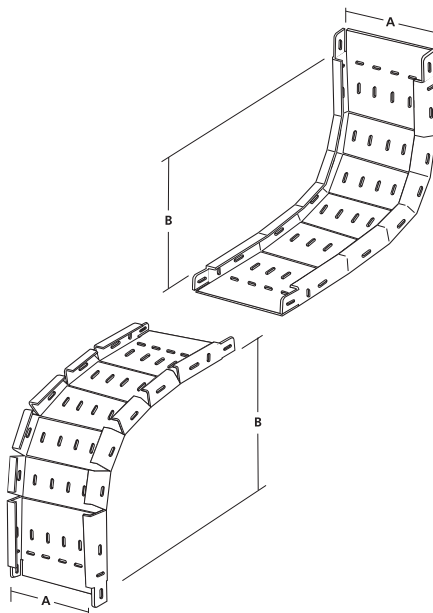

## Internal 90° Riser Bend

Ref. SSMR 75-900 IR

[illegible]



## External 90° Riser Bend

Ref. SSMR 75-900 ER

[illegible]

## Heavy Duty Cable Tray

Ref. SSHR/T 75-900

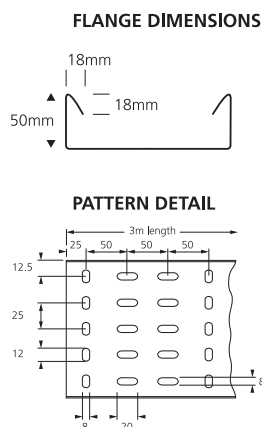


| Part no. | Gauge mm | Tray Width mm | Weight kg |
|----------|----------|---------------|-----------|
| SSHR75T  | 0.9      | 75            | 4.10      |
| SSHR100T | 0.9      | 100           | 5.22      |
| SSHR150T | 0.9      | 150           | 5.86      |
| SSHR225T | 1.2      | 225           | 9.22      |
| SSHR300T | 1.2      | 300           | 11.56     |
| SSHR450T | 1.5      | 450           | 19.78     |
| SSHR600T | 2.0      | 600           | 31.10     |
| SSHR750T | 2.0      | 750           | 37.50     |
| SSHR900T | 2.0      | 900           | 45.25     |

## Straight Coupler


Ref. SSHRSC

Length 225mm



## Cranked Coupler


Ref. SSHRCC (pair)



## Fish Plate

Ref. SSHRFP 225-900mm

Tray width less 58mm/Gauge 1.5mm




## Reducer

Ref. SSHR/ /SR



Total length 250mm

\* / / Please state sizes required



## Covers & Brackets

VENTILATED AND NON-VENTILATED  
(4 brackets supplied per cover)

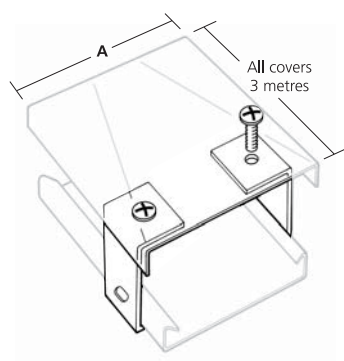

| Size mm | A mm | Gauge mm | Weight kg |
|---------|------|----------|-----------|
| 75      | 91   | 1.2      | 3.42      |
| 100     | 116  | 1.2      | 4.13      |
| 150     | 166  | 1.2      | 5.54      |
| 225     | 241  | 1.2      | 7.66      |
| 300     | 316  | 1.2      | 9.78      |
| 450     | 466  | 1.2      | 14.05     |
| 600     | 616  | 1.2      | 18.28     |
| 750     | 766  | 1.2      | 22.49     |
| 900     | 916  | 1.2      | 26.76     |

## Tray Overhead Hangers

Ref. SSOH3-12

Suitable for Light/Medium/Heavy

Size range 75mm-300mm




## Stand off Bracket

Ref. SSOB3-12

Suitable for Light/Medium/Heavy

Size range 75mm-300mm




## Earth Link

Tin coated copper

## Bolts & Nuts


M6X12 Order separately

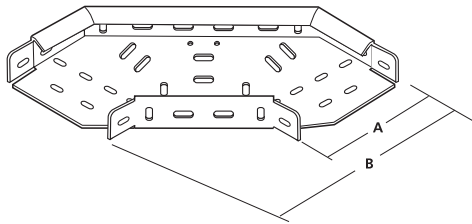

## Flat 90° Bend

Ref. SSHR 75-900 FB


|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 204       | 227        | 276        | 351        | 452        | 602        | 802        | 969        | 1150       |



## Flat 45° Bend

Ref. SSHR 75-900 HB


|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 258       | 258        | 258        | 258        | 258        | 258        | 258        | 258        | 258        |
| <b>C</b> | 172       | 182        | 202        | 234        | 265        | 327        | 389        | 451        | 511        |

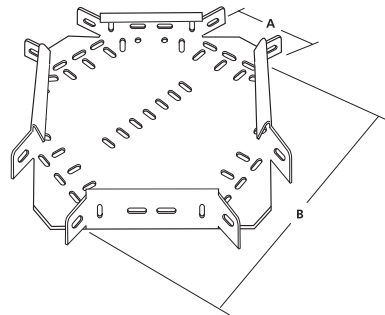

## Flat 4 Way Equal Intersection

Ref. SSMR 75-900 FW


|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 350       | 354        | 404        | 479        | 554        | 734        | 990        | 1004       | 1154       |

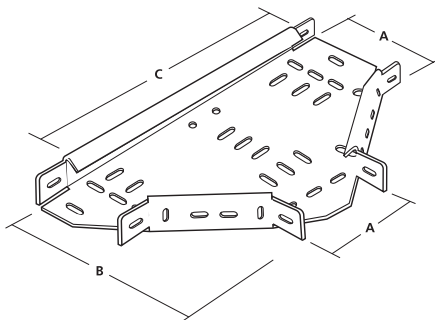

## Flat Equal Tee


Ref. SSHR 75-900 ET

|          |           |            |            |            |            |            |            |            |            |
|----------|-----------|------------|------------|------------|------------|------------|------------|------------|------------|
| <b>A</b> | <b>75</b> | <b>100</b> | <b>150</b> | <b>225</b> | <b>300</b> | <b>450</b> | <b>600</b> | <b>750</b> | <b>900</b> |
| <b>B</b> | 214       | 227        | 284        | 363        | 439        | 594        | 869        | 950        | 1027       |
| <b>C</b> | 350       | 351        | 415        | 500        | 575        | 735        | 990        | 1140       | 1154       |



## Internal 90° Riser Bend

Ref. SSHR 75-900 IR


[illegible]

## External 90° Riser Bend

Ref. SSHR 75-900 ER


[illegible]

### Deep Channel




Part no.  
**302XBA10**  
**302XBA11**  
**302XBB10**  
**302XBB11**

### Shallow Channel




Part no.  
**306XBA10**  
**306XBA11**  
**306XBB10**  
**306XBB11**

### Back To Back Deep Channel




Part no.  
**310XBA10**  
**310XBA11**  
**310XBH10**  
**310XBH11**

### Back To Back Shallow Channel




Part no.  
**310XBC10**  
**310XBC11**  
**310XBC10**  
**310XBC11**

### Slotted Deep Channel




Part no.  
**302XABA10**  
**302XABA11**  
**302XABB10**  
**302XABB11**

### Slotted Shallow Channel




Part no.  
**306XABA10**  
**306XABA11**  
**306XABB10**  
**306XABB11**



The safe loading figures are based on


- a) The x-x axis
- b) A simply supported beam
- c) Pre-galvanised steel - yield 250N/mm<sup>2</sup>
- d) A safety factor of 1.5 against yield



### Internal Washer

| Part no. | Weight |
|----------|--------|
| 325XAJ02 | 56g    |


Hole size 10mm



### Square Washer


| Part no. | Hole size |
|----------|-----------|
| 325XAJ03 | 6mm       |
| 325XAJ05 | 8mm       |
| 325XAJ07 | 10mm      |
| 325XAJ10 | 12mm      |

Square Washer weight 73g




### Two Hole Plate

| Part no. | Weight |
|----------|--------|
| 325XAD11 | 153g   |




### Three Hole Plate

| Part no. | Weight |
|----------|--------|
| 325XAC11 | 229g   |




### Four Hole Plate

| Part no. | Weight |
|----------|--------|
| 325XAC13 | 306g   |




### Five Hole Plate

| Part no. | Weight |
|----------|--------|
| 325XAY10 | 382g   |




### L Bracket

| Part no. | Weight |
|----------|--------|
| 325XAG10 | 207g   |




### T Bracket

| Part no. | Weight |
|----------|--------|
| 325XAF13 | 276g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAS10 | 162g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAD10 | 153g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAC09 | 229g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAC10 | 229g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAE10 | 306g   |




### Right Angle Shelf Bracket

| Part no. | Weight |
|----------|--------|
| 325XAE12 | 394g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAQ11 | 692g   |




### Shallow Z Bracket

| Part no. | Weight |
|----------|--------|
| 325XAD28 | 188g   |




### Multiple Z Bracket

| Part no. | Weight |
|----------|--------|
| 325XAU10 | 306g   |




### 'W' Shaped Deep Bracket

| Part no. | Weight |
|----------|--------|
| 325XAU15 | 306g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAE11 | 306g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAQ10 | 643g   |




### Right Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAQ12 | 458g   |




### Deep Z Bracket

| Part no. | Weight |
|----------|--------|
| 325XAC12 | 229g   |




### Back to Back Bracket

| Part no. | Weight |
|----------|--------|
| 325XAT11 | 306g   |




### Double Channel Bracket

| Part no. | Weight |
|----------|--------|
| 325XAJ11 | 459g   |




### Deep 'U' Bracket

| Part no. | Weight |
|----------|--------|
| 325XAJ12 | 382g   |




### Shallow 'U' Bracket

| Part no. | Weight |
|----------|--------|
| 325XAJ13 | 293g   |




### Multi-Channel Bracket

| Part no. | Weight |
|----------|--------|
| 325XAJ14 | 535g   |




### Double Channel Base Plate

| Part no. | Weight |
|----------|--------|
| 325XAT10 | 984g   |




### Single Channel Base Plate

| Part no. | Weight |
|----------|--------|
| 325XAN10 | 471g   |




### Single Channel Base Plate

| Part no. | Weight |
|----------|--------|
| 325XAR10 | 454g   |




### Two Leg Wing Fitting

| Part no. | Weight |
|----------|--------|
| 325XAV10 | 704g   |




### Three Leg Wing Fitting

| Part no. | Weight |
|----------|--------|
| 325XAV09 | 790g   |




### Wing Fitting with Gussets

| Part no. | Weight |
|----------|--------|
| 325XAW01 | 1478g  |




### Double Channel Wing Fitting

| Part no. | Weight |
|----------|--------|
| 325XAW02 | 1729g  |




### Short Gusseted Wing Fitting

| Part no. | Weight |
|----------|--------|
| 325XAW03 | 800g   |




### Short Wing Fitting Two Channel

| Part no. | Weight |
|----------|--------|
| 325XAW04 | 906g   |




### Deep External Connector

| Part no. | Weight |
|----------|--------|
| 325XAK10 | 488g   |




### Channel Support Bracket

| Part no. | Weight |
|----------|--------|
| 325XAF10 | 276g   |




### L/H Channel Support Bracket

| Part no. | Weight |
|----------|--------|
| 325XAF11 | 276g   |



### R/H Channel Support Bracket


| Part no. | Weight |
|----------|--------|
| 325XAF12 | 276g   |



### Obtuse Angle Bracket 45°

| Part no. | Weight |
|----------|--------|
| 325XAD17 | 188g   |


Other angles to order.



### Acute Angle Bracket 45°


| Part no. | Weight |
|----------|--------|
| 325XAH11 | 219g   |

Other angles to order.




### 45° Angle Bracket

| Part no. | Weight |
|----------|--------|
| 325XAF14 | 276g   |



### Shallow External Connector


| Part no. | Weight |
|----------|--------|
| 325XAK11 | 320g   |



### Internal Connector

| Part no. | Weight |
|----------|--------|
| 325XAK13 | 434g   |


M10 setscrews supplied separately



### Internal Connector


| Part no. | Size        |
|----------|-------------|
| 336XAB08 | 200mm, 395g |
| 325XAB10 | 300mm, 592g |

043/2 supplied tapped with 4xM4 setscrews.  
043/3 supplied with clearance holes only.




### 3 Way Corner Bracket

| Part no. | Weight |
|----------|--------|
| 325XAV02 | 361g   |




### Cross Support Bracket

| Part no. | Weight |
|----------|--------|
| 325XAB10 | 501g   |




### Channel Support Bracket R/H

| Part no. | Weight |
|----------|--------|
| 325XAG15 | 268g   |



### Channel Support Bracket L/H


| Part no. | Weight |
|----------|--------|
| 325XAG16 | 268g   |



### Beam Clamp

| Part no. | Weight |
|----------|--------|
| 325XAP11 | 121g   |


Max. loading 300kg per pair.



### Beam Clamp

| Part no. | Weight |
|----------|--------|
| 325XAX10 | 528g   |


Including cone point set screw.  
Max. loading 225kg per pair.  
*For flange thickness up to 18mm.*



### Beam Clamp


| Part no. | Weight |
|----------|--------|
| 325XAX11 | 185g   |

Including cone point set screw.  
Max. loading 250kg per pair.  
*For flange thickness up to 17mm.*



### 'Z' Purlin Clip (M10 Hole)


| Part no. | Weight |
|----------|--------|
| 325XAH10 | 68g    |



### Beam Clamp (Shallow Channel)

| Part no. | Weight |
|----------|--------|
| 325XAL11 | 375g   |


Including cone point set screw.  
Max. loading 500kg per pair/supplied singly.  
*For flange thickness up to 15mm.*



### Beam Clamp

| Part no. | Weight |
|----------|--------|
| 325XAP10 | 375g   |


Including cone point set screw.  
Max. loading 300kg per pair/supplied singly.  
*For flange thickness up to 17mm.*



### Beam Clamp (Deep Channel)

| Part no. | Weight |
|----------|--------|
| 325XAL10 | 350g   |


Including cone point set screw.  
Max. loading 500kg per pair/supplied singly.



### Beam Clamp (Back to Back Deep Channel)

| Part no. | Weight |
|----------|--------|
| 325XAM12 | 386g   |


Supplied singly with nuts, bolts and washers.  
Max. loading 1100kg per pair.  
*For flange thickness up to 25mm.*



### Beam Clamp (Deep Channel)

| Part no. | Weight |
|----------|--------|
| 325XAM10 | 343g   |

25mm flange range.  
Weight includes nuts, bolts and washers.  
Max. loading 1100kg per pair/supplied singly.  
*Also suitable for shallow channel up to 25mm.*



### Heavy Duty Beam Clamp (Back to Back Deep Channel)

| Part no. | Weight |
|----------|--------|
| 325XAM14 | 898g   |


25-40mm flange range.  
Weight includes nuts, bolts and washers.  
Max. loading 1800kg per pair.

| Part no. | Weight |
|----------|--------|
| 325XAM13 | 691g   |

Up to 25mm flange range.  
Weight includes nuts, bolts and washers.  
Max. loading 1800kg per pair.

### Flat Plate


Ref. SSA 150-750



| Part no. | Product | A (Arm Length) |
|----------|---------|----------------|
| 340XAH10 | 2 Hole  | 150mm          |
| 340XAH11 | 2 Hole  | 300mm          |
| 340XAH12 | 2 Hole  | 450mm          |
| 340XAH13 | 2 Hole  | 600mm          |
| 340XAH14 | 2 Hole  | 750mm          |


### Single Hole Anti Swivel

Ref. SSB 150-750




| Part no. | Product | A (Arm Length) |
|----------|---------|----------------|
| 340XAA10 | 1 Hole  | 150mm          |
| 340XAA11 | 1 Hole  | 300mm          |
| 340XAA12 | 1 Hole  | 450mm          |
| 340XAA13 | 1 Hole  | 600mm          |
| 340XAA14 | 1 Hole  | 750mm          |

### End Cap (Shallow)




| Part no. | Thread size |
|----------|-------------|
| 325XAA11 | Black PVC   |
| 325XAA13 | White PVC   |

### End Cap (Deep)




| Part no. | Thread size |
|----------|-------------|
| 325XAA10 | Black PVC   |
| 325XAA12 | White PVC   |

### Cover Strip




|                 | Part no. | Length  |
|-----------------|----------|---------|
| White PVC       | 339AA10  | 3m long |
| Stainless Steel | 339XAB10 | 3m long |

### Cone Pointed Bolts



| Part no.  | Thread size |
|-----------|-------------|
| 32701-X10 | M10 x 40    |

NB: Also available in Stainless Steel are other accessories as shown in Cable Supports Brochure no.7 ie.Spring Channel Nuts, Threaded Rod, Rod Joiners, Anchors, Nuts, Bolts, Washers, Screws, Leprack Pipe Clamp, Wedge Nuts and Beam Clamps.

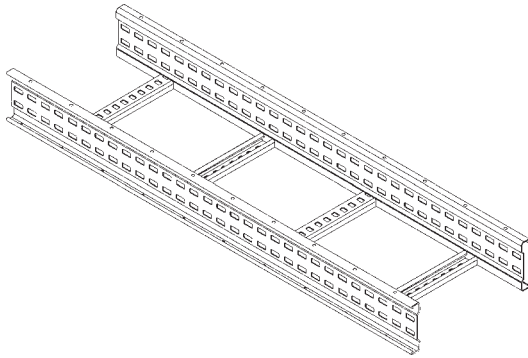


## Speedway Cable Ladder

Ref. SW-/SL/width/SS


**SS** Stainless Steel type 316-316L to  
BS EN 10088-2 (formerly BS1449 Pt.2)

Speedway 4 Cable Ladder is manufactured in 3.0m lengths as standard with 6.0m lengths supplied to order. The ladder is manufactured from 1.5mm material throughout. The Cable Ladder is available in standard widths of 150mm, 300mm, 450mm, 600mm, 750mm and 900mm with other widths manufactured to order. Rung spacing is 300mm standard.

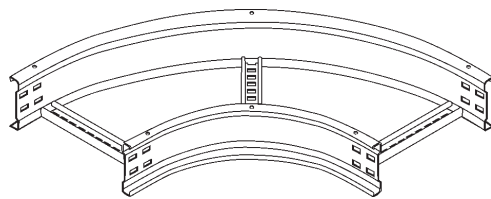


## Flat Elbow 30°, 45°, 60°, 90°

Ref. SW-/FE Angle/Width/Radius/SS

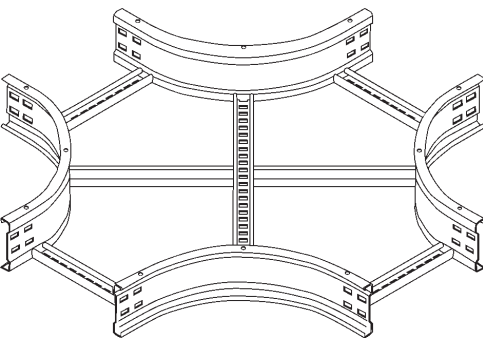

## Cross


Ref. SW-/C/Width/Radius/SS

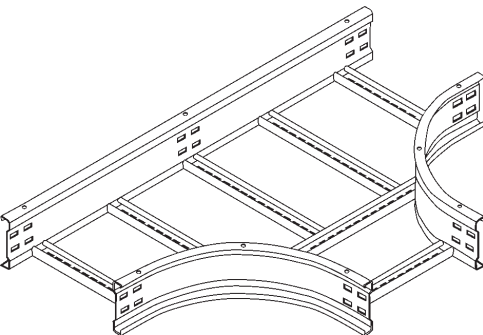

## Equal Tee

Ref. SW-/ET/Width/Radius/SS

Can also be manufactured unequal  
Ref. SW-/UET/W1/W2/Radius/SS

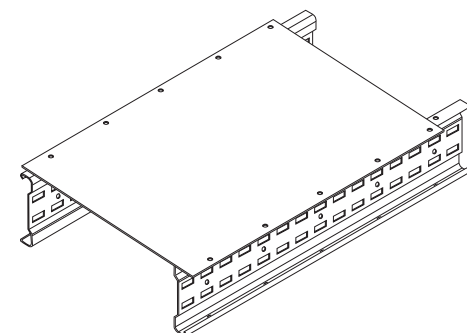

## Covers

Ref. SW-/C/Width/SS


Can be installed as closed or ventilated

Closed Cover fixings Ref. VCF3

Raised Cover fixings Ref. VCF4


8 required per length

Straight ladder Covers are 1.5m long

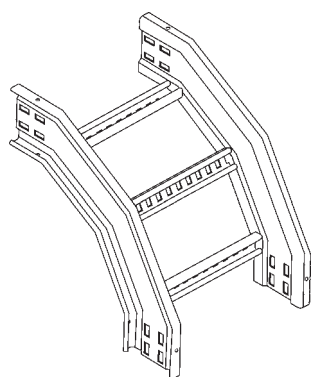


### Riser (Outside) 30°, 45°, 60°, 90°

Ref. SW-/OR Angle/Width/Radius/SS

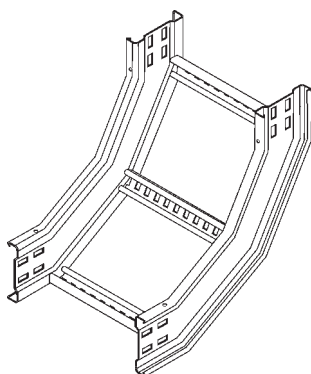


### Riser (Inside) 30°, 45°, 60°, 90°

Ref. SW-/IR Angle/Width/Radius/SS

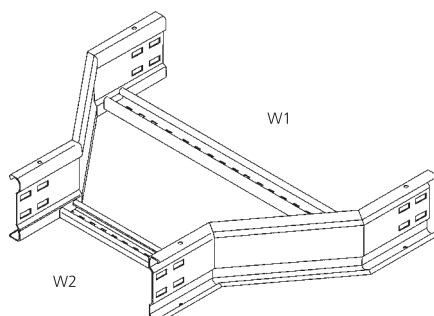

### Straight Reducer

Ref. SW-/RS/W1/W2/SS

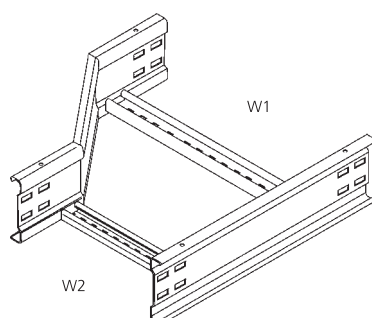

### Reducer Right Hand

Ref. SW-/RR/W1/W2/SS (Illustrated)

### Reducer Left Hand

Ref. SW-/RL/W1/W2/SS



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS  
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

[www.cablejoints.co.uk](http://www.cablejoints.co.uk)

**Thorne and Derrick UK**

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582