




Enclosure Type Stainless Steel Size I

Increased Safety Exe
Dual Certified ATEX/IECEx

S Series Stainless Steel Enclosures

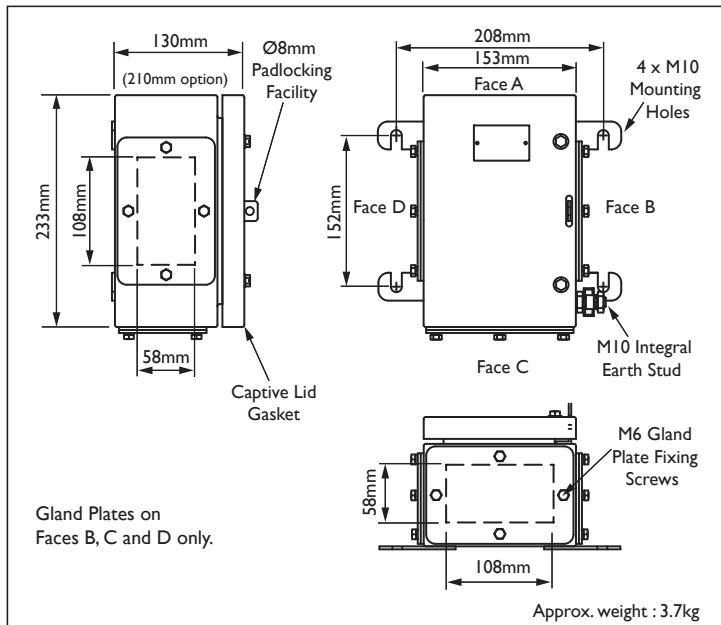

Technical Data

- Increased Safety Exe. Ex II 2 GD Exe II ExtD A2I
- SIZE I Certificate No. Baseefa 08 ATEX 0208X & IECEx BAS 08.0065X
- ZSIZE I Certificate No. Baseefa 08 ATEX 0207U & IECEx BAS 08.0064U
- Suitable for use in Zone 1, Zone 2, Zone 21 & Zone 22.
- Construction and test standards IEC/EN 60079-0 & IEC/EN 60079-7, IEC/EN 61241-0 & IEC/EN 61241-1.
- IP66 ingress protection to IEC/EN 60529.
- DTS01 deluge protection witnessed by EECS.
- Operating temperature range -60°C to $+80^{\circ}\text{C}$.
- Temperature Class and Ambient T6 40°C . Optional T5 with ambients up to 65°C .
- Assembly instruction data sheet No. A.I. 266. For SIZE I.
- Assembly instruction data sheet No. A.I. 267. For ZSIZE I.
- 210mm deep option available.

- Alternative Certification Options Available.

- Exe II.
- AExe II/Exe II.
- GOST R-Exe IIU.

For full Technical Specification see page 35.

MAXIMUM QUANTITY OF ENTRIES PER FACE

Thread Size	M16	M20/O	M20/A	M25	M32
Quantity	5 # *	5 # *	3	2	1

Serrated Washers/Locknuts with large outside diameters may foul on adjacent glands.

* Serrated Washers/Locknuts must not foul on aperture wall.

Note: For Cable Entry Positions see page 32.

TERMINAL CAPACITY DATA

Terminal Type	Conductor Size (mm ²)		Max. Volts	Max. Physical Terminal Content		Reduced Terminal Content at Max. Terminal Amps	
	Min.	Max.		Terminal Quantity	Amps	Terminal Quantity	Amps
WDU 2.5	0.5	2.5	550	30	13	18	17
WDU 4	0.5	4	690	25	17	16	22
WDU 6	0.5	6	550	19	24	13	29
WDU 10	1.5	10	550	15	34	11	40
WDU 16	1.5	16	690	13	45	9	53
WDU 35	2.5	35	690	9	75	6	87

Notes: For Junction Box Wattage Factor & Combined Terminal Resistance see pages 37 - 39.

The box is supplied with an integral internal/external earth stud assembly.

The terminals listed are restricted to a minimum operating temperature of -50°C .