




Enclosure Type Stainless Steel Size 7

Increased Safety Exe
Dual Certified ATEX/IECEx

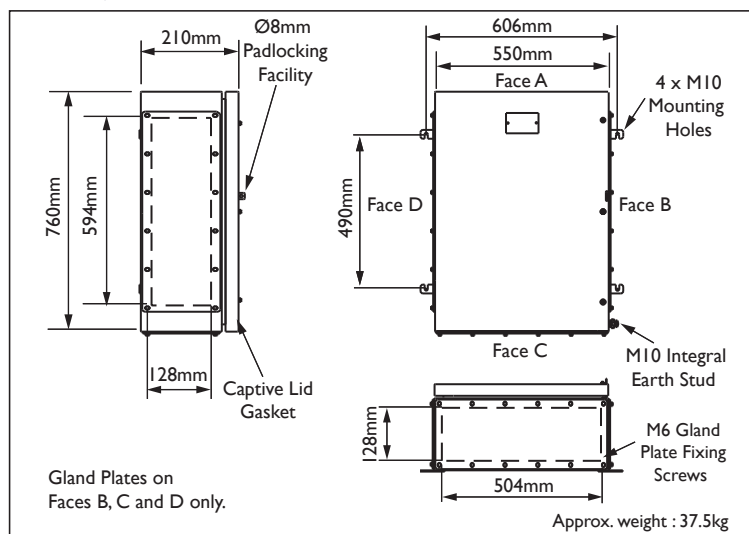

MAXIMUM QUANTITY OF ENTRIES PER FACE

Thread Size	M16	M20/O	M20/A	M25	M32	M40	M50	M63	M75
Bottom Face C Quantity	56 #	56 #	36	26	16	11	7	5	4
Side Faces B & D Quantity	64 #	64 #	42	30	18	13	8	6	4

Serrated Washers/Locknuts with large outside diameters may foul on adjacent glands.

* Serrated Washers/Locknuts must not foul on aperture wall.

Note: For Cable Entry Positions see page 34.

Technical Data

- Increased Safety Exe. Ex II 2 GD Exe II ExtD A2I
- SIZE 7 Certificate No. Baseefa 08 ATEX 0208X & IECEx BAS 08.0065X
- ZSIZE 7 Certificate No. Baseefa 08 ATEX 0207U & IECEx BAS 08.0064U
- Suitable for use in Zone 1, Zone 2, Zone 21 & Zone 22.
- Construction and test standards IEC/EN 60079-0 and IEC/EN 60079-7, IEC/EN 61241-0 and IEC/EN 61241-1.
- IP66 ingress protection to IEC/EN 60529.
- DTS01 deluge protection witnessed by EECS.
- Operating temperature range -60°C to +80°C.
- Temperature Class and Ambient T6 40°C. Optional T5 with ambients up to 65°C.
- Assembly instruction data sheet No. A.I. 266. For SIZE 7.
- Assembly instruction data sheet No. A.I. 267. For ZSIZE 7.
- 210mm deep option available.

Alternative Certification Options Available.

- Exe II.
- AExe II/Exe II.
- GOST R-Exe IIU.

For full Technical Specification see page 35.

TERMINAL CAPACITY DATA

Terminal Type	Conductor Size (mm ²)		Max. Volts	Max. Physical Terminal Content		Reduced Terminal Content at Max. Terminal Amps	
	Min.	Max.		Terminal Quantity	Amps	Terminal Quantity	Amps
WDU 2.5	0.5	2.5	550	600	3	24	17
WDU 4	0.5	4	690	515	4	23	22
WDU 6	0.5	6	550	380	6	19	29
WDU 10	1.5	10	550	300	9	16	40
WDU 16	1.5	16	690	250	12	14	53
WDU 35	2.5	35	690	190	21	11	87
WDU 70N	10	70	690	93	42	9	134
WDU 70/95	16	70	690	23	83	8	134
WDU 70/95	16	95		23	94	11	
WDU 120/150	35	120	690	20	110	9	162
WDU 120/150		150		20	117	10	
WFF 35	2.5	35	1100	46	45	16	76
WFF 70	2.5	70	1100	40	67	13	116
WFF 120	6	120	1100	15	145	11	162
WFF 185	10	185	1100	11	203	8	234
WFF 300	25	300	1100	11	227	6	316

Notes: For Junction Box Wattage Factor & Combined Terminal Resistance see pages 37 - 39.

The box is supplied with an integral internal/external earth stud assembly.

The terminals listed are restricted to a minimum operating temperature of -50°C.

Connection Solutions
www.ehawke.com

UPD 10 03 09



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582

HAWKE
International

HWK90 July '08