

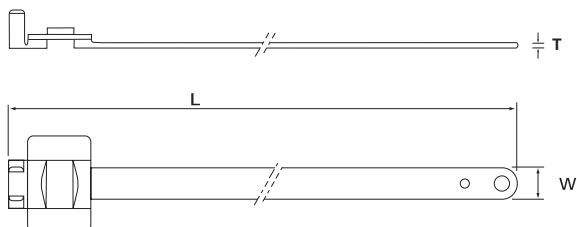
The new Releasable Type stainless steel ties from Thomas & Betts have a unique buckle design that allows the ties to be unfastened for re-use.

- Releasable and re-usable
- Corrosion resistant 316 grade stainless steel for high mechanical and chemical durability
- Fully coated version with non-toxic, Halogen free Polyester coating, for a superior protection of cables and installer's hands and for an improved insulation between dissimilar materials
- Fast, easy and reliable installation - can be installed by hand and if necessary, the slots at the end of the tie allow the use of a hook-type tool
- The additional ears can be bent back over the fastened tie to increase the tensile strength

Applications

Installation of cables and pipes in extreme conditions and hazardous areas, indoor and outdoor, such as:

- Petrochemical and food processing industries
- Power stations
- Mining
- Shipbuilding
- Offshore
- Other aggressive environments

**NEW**

Technical Information

Material	316 grade stainless Steel
Coating	Fully coated with non-toxic, halogen free Polyester
Temperature range	Coated: -80°C to +150°C
Colour	Black coating
Flammability rating	Absolutely fireproof
Other properties	UV-resistant Coating: Halogen free, non-toxic,

Approvals



TYPE
APPROVED
PRODUCTS

Ordering Information

PRODUCT REF.	DIMENSIONS			MAX. BUNDLE DIAMETER [mm]	MINIMUM TENSILE STRENGTH [N]	QUANTITY [pieces]	TOOLING
	L [mm]	W [mm]	T [mm]				
YRL-5-150-BC	150	5.0	0.61	35	334 (1334 for DNV)	100	CT1-TB CT2-TB CT4-TB
YRL-5-230-BC	230	5.0	0.61	60	334 (1334 for DNV)	100	
YRL-5-330-BC	330	5.0	0.61	95	334 (1334 for DNV)	100	
YRL-5-450-BC	450	5.0	0.61	130	334 (1334 for DNV)	100	
YRL-5-650-BC	650	5.0	0.61	195	334 (1334 for DNV)	100	
YRL-10-150-BC	150	10.0	0.61	35	1112 (2000 for DNV)	100	
YRL-10-230-BC	230	10.0	0.61	60	1112 (2000 for DNV)	100	
YRL-10-330-BC	330	10.0	0.61	95	1112 (2000 for DNV)	100	
YRL-10-450-BC	450	10.0	0.61	130	1112 (2000 for DNV)	100	
YRL-10-650-BC	650	10.0	0.61	195	1112 (2000 for DNV)	100	
YRL-10-750-BC	750	10.0	0.61	225	1112 (2000 for DNV)	100	
YRL-10-900-BC	900	10.0	0.61	270	1112 (2000 for DNV)	100	

For tooling specifications see pages 104 to 111