


The new Releasable Type stainless steel ties from Thomas & Betts have a unique buckle design that allows the ties to be unfastened for re-use.

- Releasable and re-usable
- Corrosion resistant 316 grade stainless steel for high mechanical and chemical durability
- Fully coated version with non-toxic, Halogen free Polyester coating, for a superior protection of cables and installer's hands and for an improved insulation between dissimilar materials
- Fast, easy and reliable installation - can be installed by hand and if necessary, the slots at the end of the tie allow the use of a hook-type tool
- The additional ears can be bent back over the fastened tie to increase the tensile strength

Applications

Installation of cables and pipes in extreme conditions and hazardous areas, indoor and outdoor, such as:

- Petrochemical and food processing industries
- Power stations
- Mining
- Shipbuilding
- Offshore
- Other aggressive environments

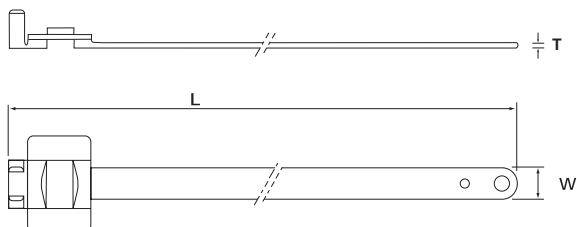

Ordering Information

| PRODUCT REF. | L [mm] | W [mm] | T [mm] | MAX. BUNDLE DIAMETER [mm] | MINIMUM TENSILE STRENGTH [N] | QUANTITY [pieces] | TOOLING |
|---------------|-----------|-----------|-----------|---------------------------------|------------------------------------|----------------------|---------|
| YRL-5-150-BC | 150 | 5.0 | 0.61 | 35 | 334 (1334 for DNV) | 100 | |
| YRL-5-230-BC | 230 | 5.0 | 0.61 | 60 | 334 (1334 for DNV) | 100 | |
| YRL-5-330-BC | 330 | 5.0 | 0.61 | 95 | 334 (1334 for DNV) | 100 | |
| YRL-5-450-BC | 450 | 5.0 | 0.61 | 130 | 334 (1334 for DNV) | 100 | |
| YRL-5-650-BC | 650 | 5.0 | 0.61 | 195 | 334 (1334 for DNV) | 100 | |
| YRL-10-150-BC | 150 | 10.0 | 0.61 | 35 | 1112 (2000 for DNV) | 100 | CT1-TB |
| YRL-10-230-BC | 230 | 10.0 | 0.61 | 60 | 1112 (2000 for DNV) | 100 | CT2-TB |
| YRL-10-330-BC | 330 | 10.0 | 0.61 | 95 | 1112 (2000 for DNV) | 100 | CT4-TB |
| YRL-10-450-BC | 450 | 10.0 | 0.61 | 130 | 1112 (2000 for DNV) | 100 | |
| YRL-10-650-BC | 650 | 10.0 | 0.61 | 195 | 1112 (2000 for DNV) | 100 | |
| YRL-10-750-BC | 750 | 10.0 | 0.61 | 225 | 1112 (2000 for DNV) | 100 | |
| YRL-10-900-BC | 900 | 10.0 | 0.61 | 270 | 1112 (2000 for DNV) | 100 | |

NEW



Technical Information

| | |
|---------------------|---|
| Material | 316 grade stainless Steel |
| Coating | Fully coated with non-toxic, halogen free Polyester |
| Temperature range | Coated: -80°C to +150°C |
| Colour | Black coating |
| Flammability rating | Absolutely fireproof |
| Other properties | UV-resistant Coating: Halogen free, non-toxic, |

Approvals



TYPE
APPROVED
PRODUCTS