

TRACTION Fuse-Links

20 x 127 Cylindrical Fuses, 2 to 30 Amps



Standards/Approvals:

CE, designed and tested to IEC 60269: part 4

Description: 20x127 Cylindrical fuse-links with or without indicator

Packaging: 10 fuse-links per carton

Technical Data:

Traction Fuse-Links

Rated Voltage: see table

Amps: 2 to 30A


Rated Breaking Capacity: 50kA RMS Sym
50kA dc

RoHS Compliant

Catalogue Symbol: FWS(amp)A20F
FWL(amp)A20F
Add suffix "I" for indicator version

Class of Operation: gS

Dimensional Data:

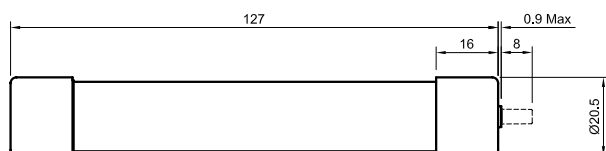

Catalogue Numbers:

Standard Approvals: CE, IEC 60269: part 4

Technical Data: FWS: 2, 6, 8, 10, 12 & 15 Amps
FWL: 20, 25 & 30 Amps

Part Numbers	Rated Current RMS Amps	I^2t (A ² sec)		Watts Loss	Voltage Ratings	
		Minimum Pre-Arcing	Clearing at 100V dc		ac	dc
FWS-2A20F	2	0.8	2.4	4.4	2100	1000 V
FWS-6A20F	6	27	81	6.7	2100	1000 V
FWS-8A20F	8	64	192	7.6	2100	1000 V
FWS-10A20F	10	118	277	3.0	1400	1000 V
FWS-12A20F	12	170	380	3.4	1400	1000 V
FWS-15A20F	15	209	500	5.0	1400	1000 V
FWL-20A20F	20	675	1550	5.9	1200	1000 V
FWL-25A20F	25	1200	2760	6.5	1200	1000 V
FWL-30A20F	30	1850	4300	7.5	1200	1000 V




WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK

TRACTION Fuse-Links

20 x 127 Cylindrical Fuses, 2 to 30 Amps

Time Current Curves

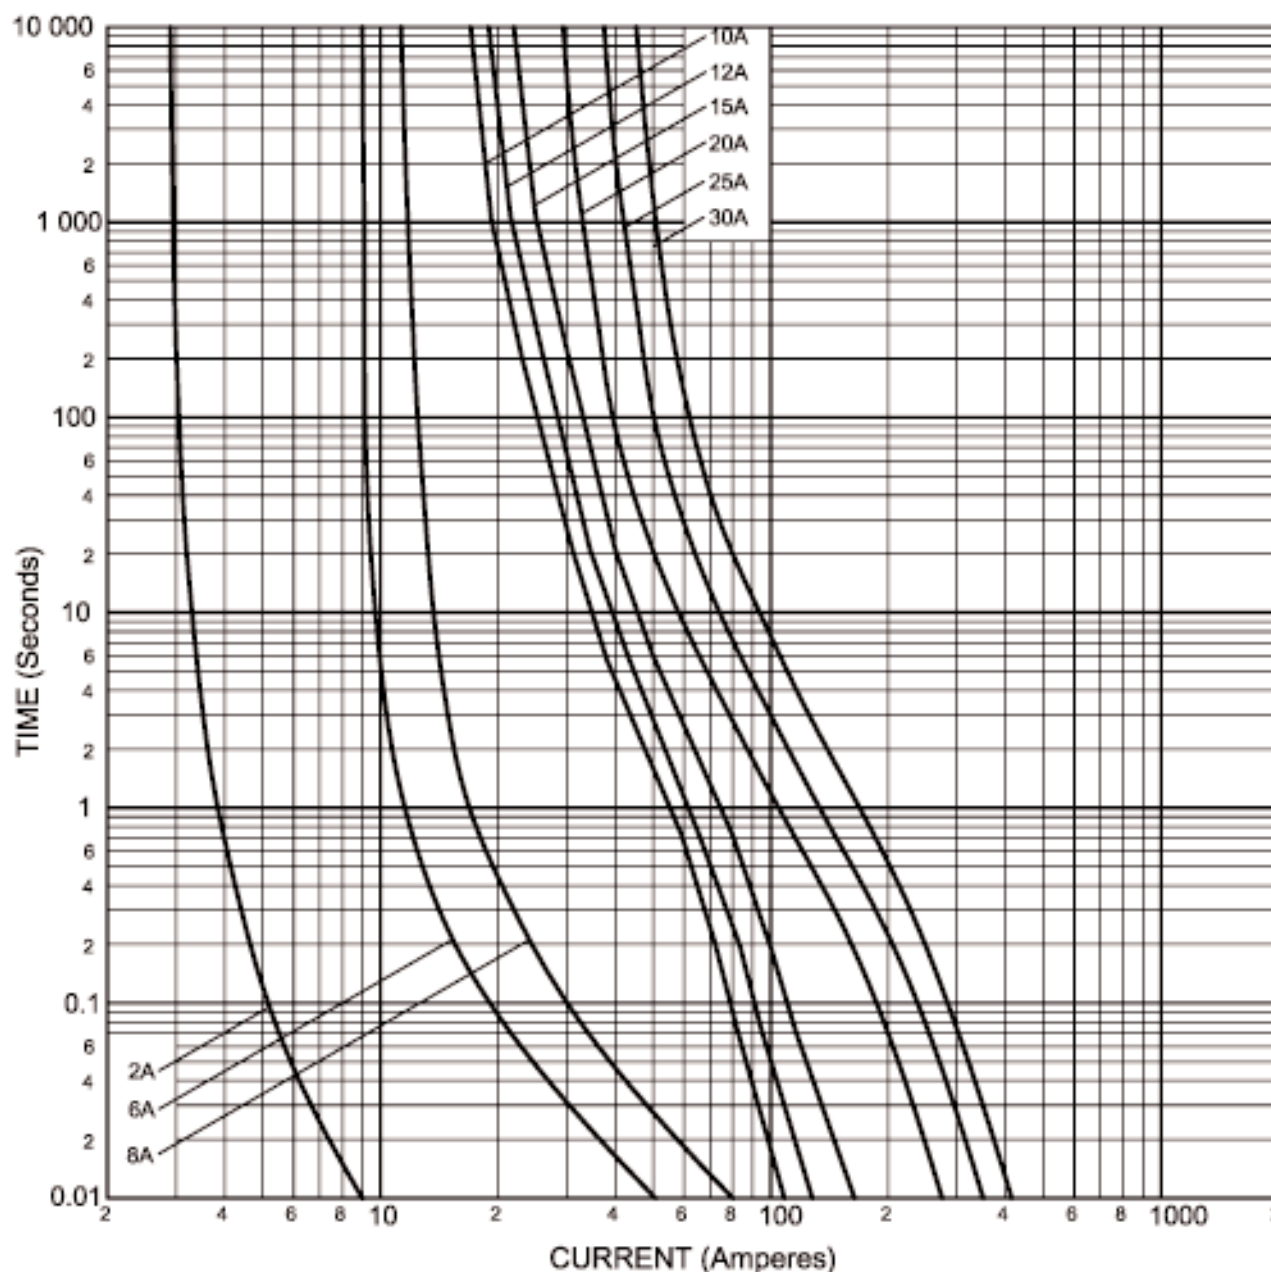

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
 TEL 0044 191 490 1547 FAX 0044 477 5371
 TEL 0044 117 977 4647 FAX 0044 977 5582
WWW.THORNEANDDERRICK.CO.UK