



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582

WOLF INTRINSICALLY SAFE TORCH



- **Unique Variable Beam Adjustment**
- **Modular Construction for Flexible Options**
- **Twin Concept Ex. Enclosure**
- **Self Re-locking Bulb Enclosure**
- **0.5A High Efficiency Krypton or Xenon Bulb**
- **Moulded in High Impact Thermoplastic Resin**
- **Right angle models with clip available for 'hands-free' operation**
- **CE marked to ATEX Directive**

T-2DC & T-2DCRA

1.2w variable beam

Peak luminous intensity for spot beam (approx 4.5°) at 5m **200lux**



Peak luminous intensity for wide beam (approx 25°) at 5m **30lux**

T-3DC & T-3DCRA

1.8w variable beam

Peak luminous intensity for spot beam (approx 4.5°) at 5m **300lux**

Peak luminous intensity for wide beam (approx 25°) at 5m **40lux**

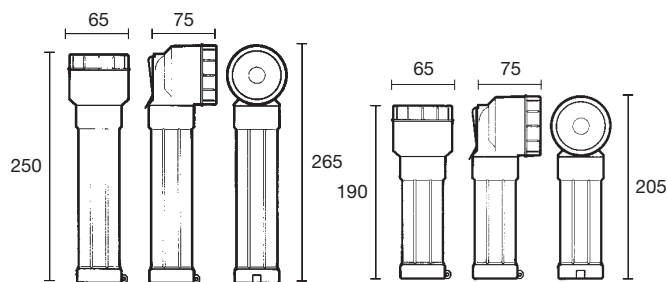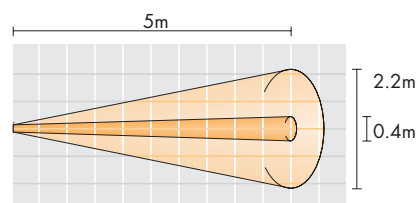

1180

The Wolf Intrinsically Safe Torch range comprises four models designed to meet a wide scope of requirements. The robustly constructed torches are moulded in high impact thermoplastic resin for lasting durability and service requirements. Compact and simple to use, the torches are designed for use in potentially explosive atmospheres, emergency situations or wherever the need arises for a handheld safety torch.

The range complies with the 94/9/EC ATEX Directive as Category 2 equipment, and is approved to the latest European "EN" Standards for "Electrical apparatus for potentially explosive atmospheres". This allows for use in Group II applications, Zones 1 and 2, IIA and IIB gases where T4 temperature class permits.

Common uses are in Fire-fighting as Breathing Apparatus (BA) torches, Gas distribution, Water treatment, and wherever explosive gases and vapours accumulate in confined spaces.

A unique and highly acclaimed feature of the torches is the Optical Focusing System. The parabolic mirror is computer designed to provide variable beam adjustment from a powerful spot to broader floodlit illumination, through the high impact lens.

The torches are available as two cell straight head (T-2DC), two cell right

angle head (T-2DCRA), three cell straight head (T-3DC) and three cell right angle head (T-3DCRA).

The 0.5A bulbs used (2.4v in two cell, 3.6v in three cell models) are high efficiency bulbs giving a high level of light output.

The Ex. construction is also unique, incorporating two separate explosion protected enclosures; a lockable 'Increased Safety' enclosure containing the internal

rotating switch and bulb, and an 'Intrinsically Safe' enclosure for the primary cells.

Each torch comes complete with a lock release pin, wrist lanyard and maintenance instructions. Certification is for any Zinc R20 size type primary cell.

Alkaline Manganese Cells of any description may not be used in this product.

Wolf Intrinsically Safe Primary Cell Torch					
Technical Specification					
Product reference	T-2DC	T-2DCRA	T-3DC	T-3DCRA	
Product description	2 cell safety torch straight head	2 cell safety torch r/angle head	3 cell safety torch straight head	3 cell safety torch r/angle head	
Code	Ex II 2G EEx e ib IIB T4				
Apparatus standard	EN50014, EN50019, EN50020				
Type of protection	“e” increased safety, “ib” intrinsic safety				
Area of class (gas)	Zones 1 and 2, gas groups IIA and IIB				
Temp. class (gas)	T4				
Ambient temperature	-20°C to +40°C				
Certificate	Baseefa02ATEX0181				
Enclosure	High impact thermoplastic resin				
Lens	Polycarbonate				
Beam type	Variable				
Light source:	Pt. no.	T-203		T-303	
	Type	Krypton/Xenon filled filament bulb			
	Volts	2.4V		3.6V	
	Watts	1.2W		1.8W	
	Output	12 lm		25 lm	
	Life	10 hrs		20 hrs	
Power source:	Pt. no.	2 x T-20		3 x T-20	
	Type	R20 D size zinc primary cells only			
Light duration		up to 5 hours			
Ingress protection		IP 66 to EN60529:1992			
Weight (excl. cells)		200g	225g	215g	240g

Note: All information has been gathered under laboratory conditions, the user must regard the values given as approximate. The Company reserves the right to alter product specifications without prior notice.



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk
Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 9775582

