


# A-4ESI



## COPPER TUBE LUGS 4-ESI FIXING

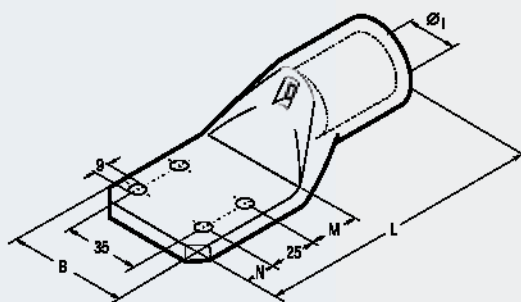

A-4ESI series lugs are made from high purity electrolytic copper tube, annealed and tin plated. The four hole stud fixing in accordance with E.A. specifications ensure compatibility with most transformer fixing arrangements.

| Conductor Size<br>sqmm | Ref.       | Dimensions mm |    |    |    |     | Quantity<br>Box/Bag | Hydraulic<br>Tools             |                  |                                                          |                    |
|------------------------|------------|---------------|----|----|----|-----|---------------------|--------------------------------|------------------|----------------------------------------------------------|--------------------|
|                        |            | Ø1            | B  | M  | N  | L   |                     | HT 51<br>RH 50<br>B 51<br>B 55 | HT 81-J<br>RH 81 | HT 120 and tools and heads<br>with 130 kN crimping force | ECONH30<br>RHU 520 |
| 185                    | A 37-4ESI  | 19,2          | 61 | 20 | 15 | 124 | 20/10               |                                |                  |                                                          |                    |
| 240                    | A 48-4ESI  | 21,1          | 61 | 20 | 15 | 128 | 20/10               |                                |                  |                                                          |                    |
| 300                    | A 60-4ESI  | 23,7          | 61 | 20 | 15 | 133 | 20/10               |                                |                  |                                                          |                    |
| 400                    | A 80-4ESI  | 27,0          | 61 | 20 | 15 | 134 | 15/5                |                                |                  |                                                          |                    |
| 500                    | A 100-4ESI | 30,3          | 61 | 20 | 15 | 139 | 10/5                |                                |                  |                                                          |                    |
| 630                    | A 120-4ESI | 33,4          | 61 | 20 | 15 | 144 | 10/5                |                                |                  |                                                          |                    |
| 800                    | A 160-4ESI | 38,0          | 61 | 20 | 15 | 158 | 8/4                 |                                |                  |                                                          |                    |



WWW.CABLEJOINTS.CO.UK

THORNE & DERRICK UK

TEL 0044 191 490 1547 FAX 0044 477 5371

TEL 0044 117 977 4647 FAX 0044 977 5582

WWW.THORNEANDDERRICK.CO.UK

