

Industrial Gland Kits

CX Brass Gland Kit KA414 Series



Application

- > Indoor/outdoor type for wire braided cable

Features & Benefits

- > Brass indoor and outdoor cable gland & accessories
- > For circular, wire braid armour plastic or rubber sheathed cables
- > Outer seal grips sheath of cable
- > For use in most climatic conditions, weatherproof and waterproof
- > Three part armour lock with separate armour locking ring, ideal for checking electrical continuity
- > Kit comprises:
 - CX Gland
 - Brass earth tag
 - Brass locknut
 - PCP shroud (except KA41491)
- > 2 per kit up to and including 25mm size

Technical Data

- > EN 50262
- > BS6121:Pt 1:1989 (except KA41491)
- > Gland rated to IP66 with use of suitable sealing washer or thread sealant at gland interface
- > Service temperature range -20°C to +90°C
- > CuZn39Pb3 extruded brass alloy used for guaranteed strength and performance




Ref: CX/03/07

CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS
FURSE EARTHING
www.cablejoints.co.uk

Thorne and Derrick UK
Tel 0044 191 490 1547 Fax 0044 191 477 5371
Tel 0044 117 977 4647 Fax 0044 117 977582



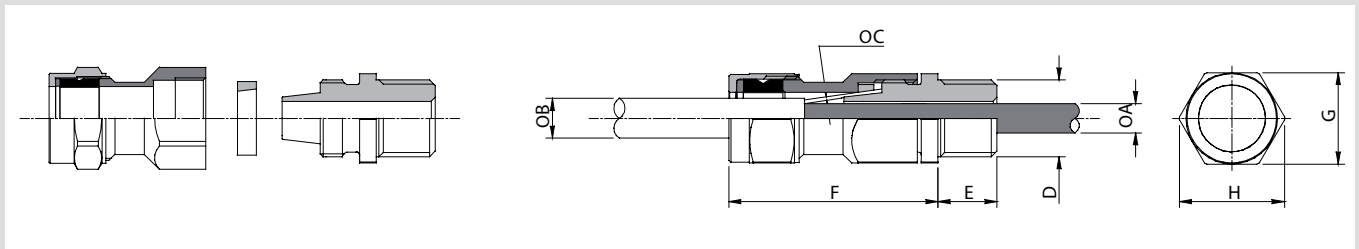

Gland Details

Cable Dimensions mm				Kit Reference			Gland Dimensions mm				
Under Braid Diameter A Max	Overall Diameter B		Braid Wire Diameter C	Size	Design Number	Items Per Pack	Entry Thread		Approx. Length From Shoulder F	Hexagon Size	
	Min	Max					Size D	Length E		Across Flats G	Across Corners H
7.5	3.5	9.2	0.2/0.3	MINI20*	KA41491	2	M20×1.5	15	40	22.0	24.9
8.6	8.0	13.2	0.2/0.3	20SS	KA41471	2	M20×1.5	10	44	23.4	26.7
11.6	8.0	15.8	0.2/0.3	20S	KA41452	2	M20×1.5	10	46	25.7	29.2
13.9	11.7	20.8	0.2/0.3	20	KA41453	2	M20×1.5	10	46	30.5	34.0
19.9	17.0	27.2	0.2/0.45	25	KA41455	2	M25×1.5	10	51	37.6	42.2
26.2	23.5	33.5	0.3/0.45	32	KA41456	1	M32×1.5	10	56	47.3	53.6
32.1	29.0	39.9	0.3/0.45	40	KA41457	1	M40×1.5	15	59	56.4	61.5
44.0	39.5	52.6	0.3/0.45	50	KA41459	1	M50×1.5	15	64	70.1	77.2
55.9	51.3	65.3	0.3/0.45	63	KA41461	1	M63×1.5	15	67	80.0	87.4
67.9	62.5	78.0	0.3/0.45	75	KA41463	1	M75×1.5	15	76	98.8	109.2

* For use with miniature braided cables. This kit does not include a shroud.



CABLE JOINTS, CABLE TERMINATIONS, CABLE GLANDS, CABLE CLEATS
FEEDER PILLARS, FUSE LINKS, ARC FLASH, CABLE ROLLERS, CUT-OUTS

11KV 33KV CABLE JOINTS & CABLE TERMINATIONS

FURSE EARTHING

www.cablejoints.co.uk

Thorne and Derrick UK

Tel 0044 191 490 1547 Fax 0044 191 477 5371

Tel 0044 117 977 4647 Fax 0044 117 9775582

