

Overhead Distribution

Fuse Service Equipment

ABC Distribution Box

Rated 240/415V

Slim-line compact model designed for wall or pole mounting. Manufactured from a glass filled U V stable flame retardant glass filled nylon, the unit fully meets the requirements of ENATS 43-14.

This box is designed to accept incoming conductors with a maximum size of 120mm² and 9 service cables of up to 35mm².

Safety and Security

All terminals are fully shrouded and identified.

Supplied with drilling hole positions, enabling easy and secure wall or pole mounting.

The hinged door can be padlocked in its closed position for extra security and safety and is fitted with a stay arm for when working in the open position.

Unit is designed to prevent unauthorised connections.


Insulated tools can be supplied if required. Standard 3mm hexagon head compatible.

- Ingress protection to IP 43/BS 60529
- All connection blocks have serrated bores, ensuring good electrical and mechanical contact.
- Lightweight but strong design
- Self sealing Polyethylene foam cable entry bush.
- Low profile unobtrusive design.
- Metal pole attachment plate available.
- IK07 rated enclosure to BS 62262



Product Selection Chart

Product Number	Description
ABC Box CNE	54611-33
ABC Box SNE	54611-21
ABC Box c/w mounting plate CNE	54611-40
ABC Box c/w mounting plate SNE	54611-34

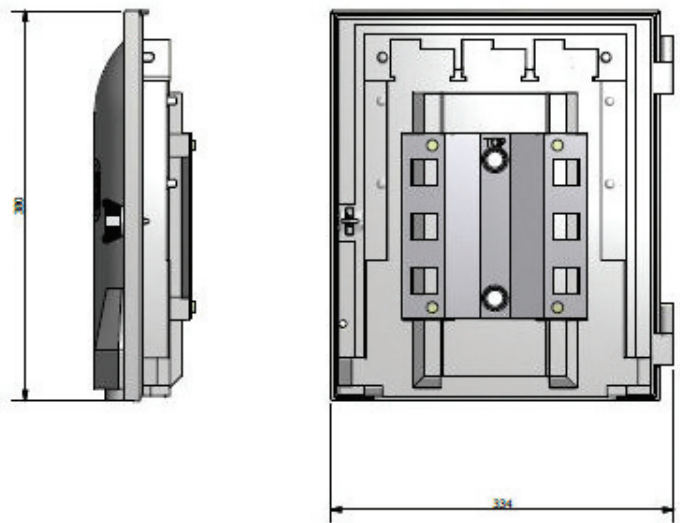

WWW.CABLEJOINTS.CO.UK
THORNE & DERRICK UK
TEL 0044 191 490 1547 FAX 0044 477 5371
TEL 0044 117 977 4647 FAX 0044 977 5582

provides the
and is
without prior written



14688 2014-02-01